AR1811D3
1-Line Low Capacitance Bi-directional TVS Diode

Description

The AR1811D3 is a 18V bi-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive high-speed data lines. The AR1811D3 has a low capacitance with a typical value at 1pF, and complies with the IEC 61000-4-2 (ESD) with ±30kV air and ±30kV contact discharge. It is assembled into a lead-free SOD-323 package. The small size, low capacitance and high ESD surge protection make AR1811D3 an ideal choice to protect cell phone, wireless systems, and communication equipment.

Features

- 350W peak pulse power (8/20μs)
- Ultra low capacitance: 1pF typical
- Ultra low leakage: nA leel
- Operating voltage: 18V
- Low clamping voltage
- Protects one power line or data line
- Complies with following standards:
  - IEC 61000-4-2 (ESD) immunity test
    - Air discharge: ±30kV
    - Contact discharge: ±30kV
  - IEC61000-4-5 (Lightning) 8A (8/20μs)
- RoHS Compliant


Mechanical Characteristics

- Package: SOD-323
- Lead Finish: Matte Tin
- Case Material: “Green” Molding Compound.
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminal Connections: See Diagram Below
- Marking Information: See Below


Applications

- USB Ports
- Smart Phones
- Wireless Systems
- Ethernet 10/100/1000 Base T

Marking Information

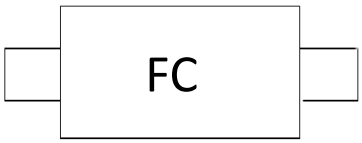

Dimensions and Pin Configuration



Circuit and Pin Schematic

Ordering Information

Part Number	Packaging	Reel Size
AR1811D3	3000/Tape & Reel	7 inch

Download from alldatasheet.com

Absolute Maximum Ratings (T_A=25°C unless otherwise specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	Ppk	350	W
Peak Pulse Current (8/20μs)	I_{PP}	8	A
ESD per IEC 61000−4−2 (Air) ESD per IEC 61000−4−2 (Contact)	V_{ESD}	±30 ±30	kV
Operating Temperature Range	T_J	−40 to +85	°C
Storage Temperature Range	Tstg	−55 to +150	°C

Electrical Characteristics (T_A=25°C unless otherwise specified)


Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V_{RWM}			18	V	
Breakdown Voltage	V_{BR}	19. 8			V	I_T = 1mA
Reverse Leakage Current	I_R			0.2	μA	V_{RWM} = 18V
Clamping Voltage	V_C			29	V	I_{PP} = 1A (8 x 20μs pulse)
Clamping Voltage	V_C			45	V	I_{PP} = 8A (8 x 20μs pulse)
Junction Capacitance	C_J		1	3	pF	VR = 0V, f = 1MHz

Download from alldatasheet.com


Typical Performance Characteristics (TA=25°C unless otherwise Specified)

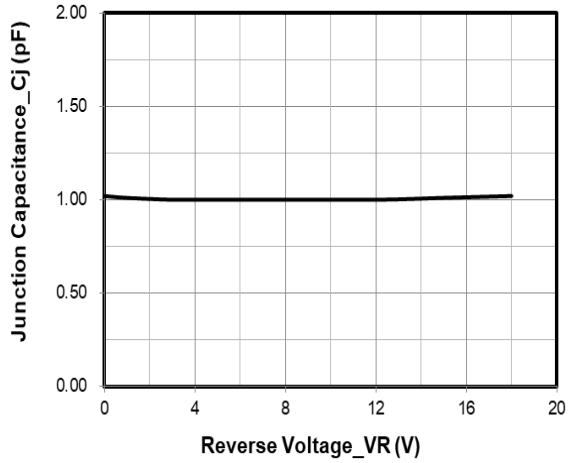


Junction Capacitance vs. Reverse Voltage

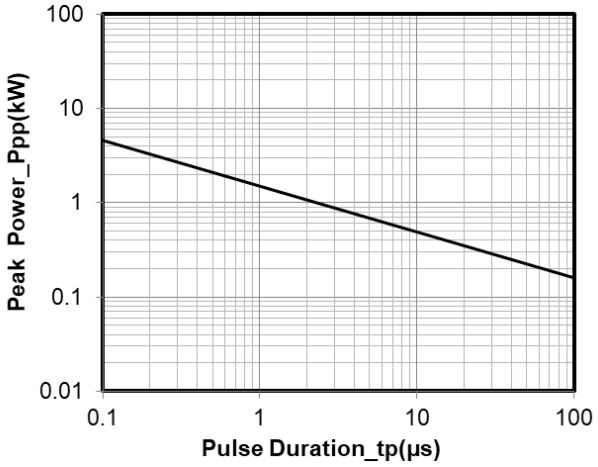


Peak Pulse Power vs. Pulse Time

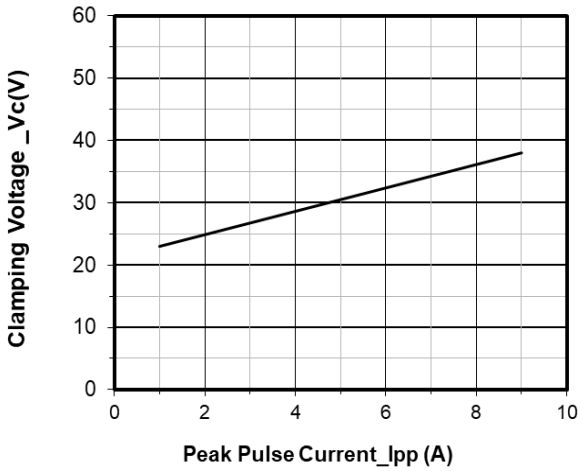


Clamping Voltage vs. Peak Pulse Current

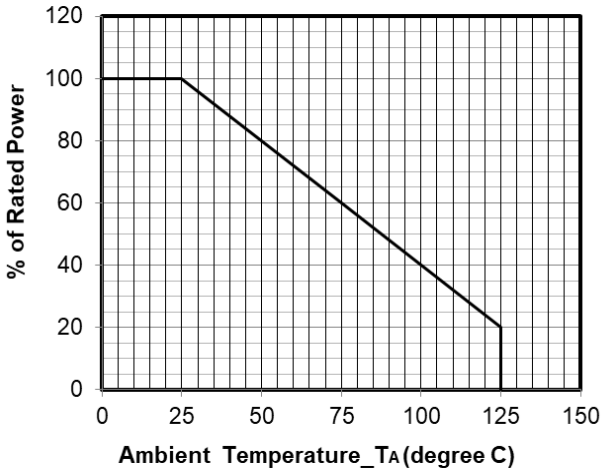

Power Derating Curve

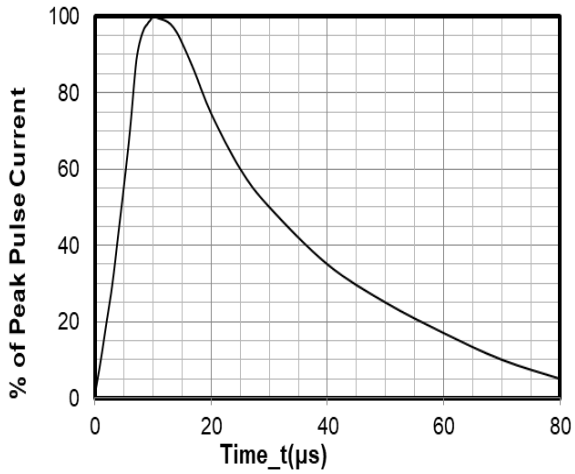

8 X 20μs Pulse Waveform

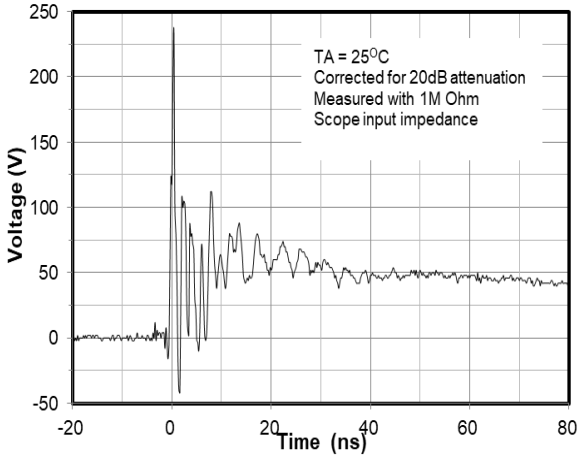


ESD Clamping Voltage

8 kV Contact per IEC61000−4−2


Download from alldatasheet.com

SOD-323 Package Outline Drawing

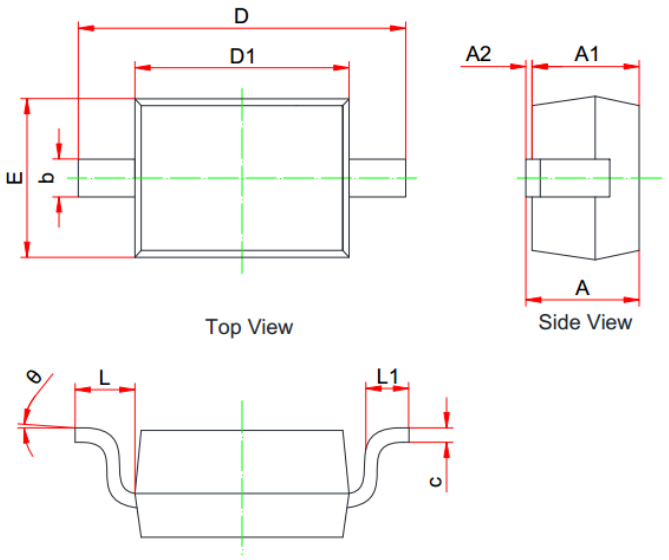

SYM	MILLIMETERS		
	MIN	NOM	MAX
A	0.800	- -	1.100
A1	0.800	- -	0.900
A2	0.000	- -	0.100
b	0.250	- -	0.400
c	0.080	- -	0.177
D1	1.600	1.700	1.800
D	2.300	- -	2.800
E	1.150	- -	1.400
L	0.475REF		
L1	0.100	- -	0.500
Θ	0°	- -	8°

Suggested Land Pattern

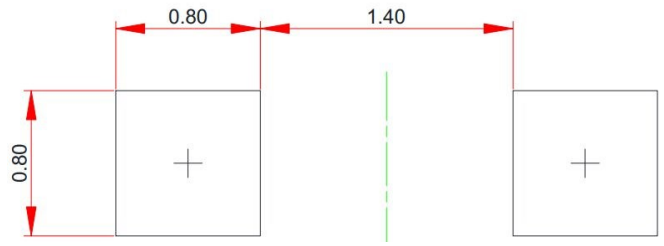

Unit：mm

Contact Information

Applied Power Microelectronics Co., Ltd.

Website: http://www.appliedpowermicro.com

Email: sales@appliedpowermicro.com

Phone: +86 (0519) 8399 3606

Applied Power Microelectronics Co., Ltd. (APM) reserves the right to make changes to the product specification and data in this document without notice. APM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does APM assume any liability arising from the application or use of any products or circuits, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.

Download from alldatasheet.com