


环保物料

TEL: 0769-82001899

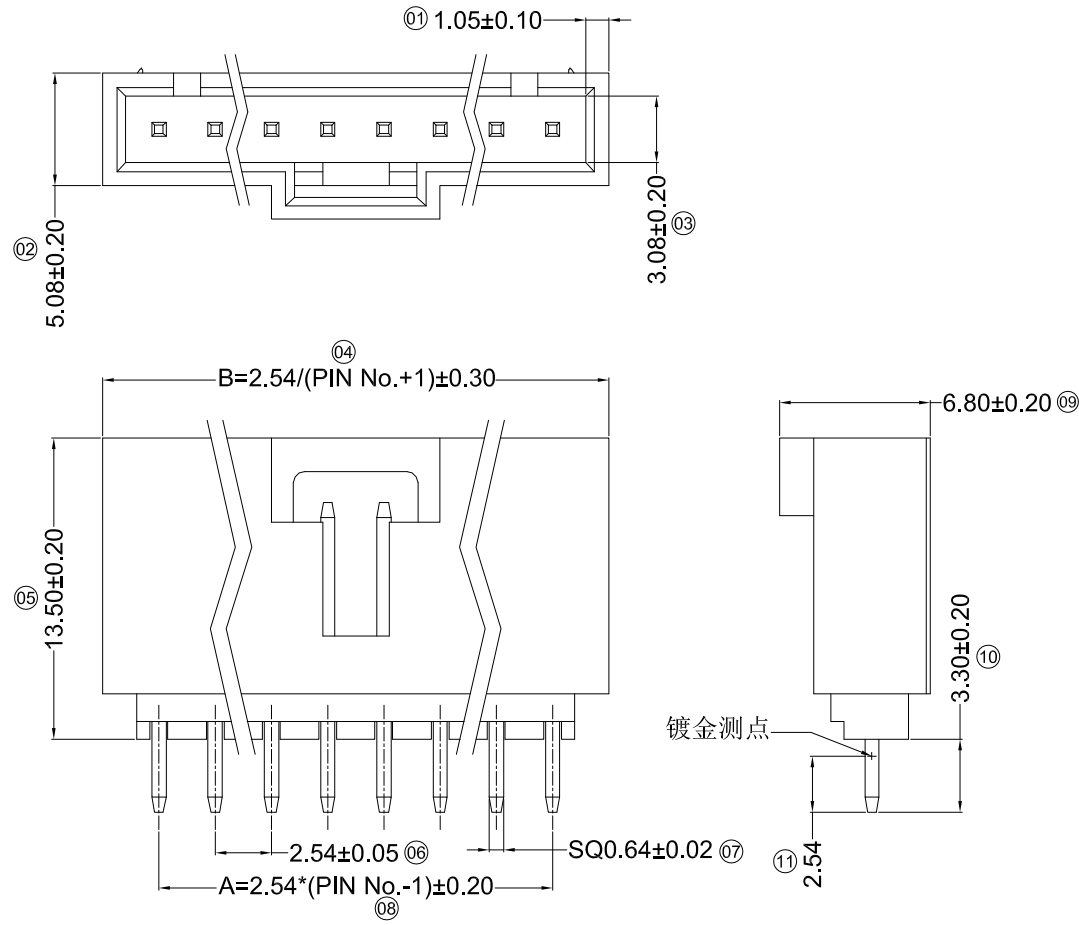

P.C.B LAYOUT

SPECIFICATIONS

- 1.Voltage rating: 250V AC, DC
- 2.Current rating: 5A, AC, DC
- 3.Withstanding Voltage: 1500V AC/minute
- 4.Insulation resistance:1000M min
- 5.Temperature range: -25 ° C~+85 ° C
- 6.Contact resistance: 20m max

WAFER

Housing Material: Nylon UL 94V-0 (2)

Pin Material: Phosphor Bronze or Brass

Contact Area Plating: Plated Tin or Plated Gold

Mates with :P2553 series Housing

Poles:02-20P

Part No.: M2553V-xx-R-BK

Pin位数

Poles	Dimensions (mm)		
	A	B	C
2	2.54	7.62	5.59
3	5.08	10.16	8.13
4	7.62	12.70	10.67
5	10.16	15.24	13.21
6	12.70	17.78	15.75
7	15.24	20.32	18.29
8	17.78	22.86	20.83
9	20.32	25.40	23.37
10	22.86	27.94	25.91
11	25.40	30.48	28.45
12	27.94	33.02	30.99
13	30.48	35.56	33.53
14	33.02	38.10	36.07
15	35.56	40.64	38.61
16	38.10	43.18	41.15
17	40.64	45.72	43.69
18	43.18	48.26	46.23
19	45.72	50.80	48.77
20	48.26	53.34	51.31
21	50.80	55.88	53.85
22	53.34	58.42	56.39
23	55.88	60.96	58.93
24	58.42	63.50	61.48
25	60.96	66.04	64.01

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN CK tan

CHKD	
APPD	
VIEW	⊕

XFCN 兴飞连接器有限公司
XFCN CONNECTORS CO.,LTD.

PRODUCT NAME	2.54mm Crimp Style Connectors
PART. NO.	M2553V-xx-R-BK

SHEET 1/1

DATE	2020. 04. 12
UNITS	mm
SCALE	1:1
DWG NO.	009

AO

VER	MODIFICATION	DRAW	DATE
-----	--------------	------	------