
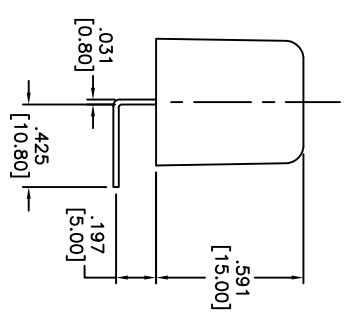
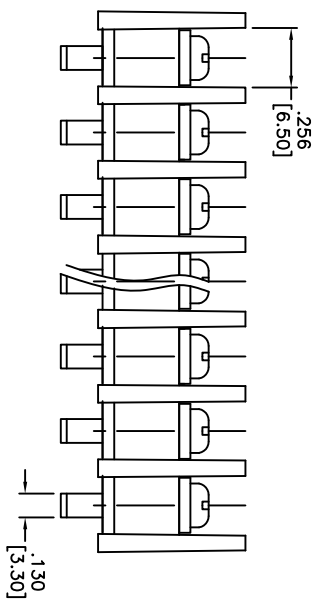


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/8/05	
A		REDRAWN	10/5/12	
B		REVISED DIM.	3/20/14	HR/QZL

APPROVED: _____
 DATE: _____ TITLE: _____

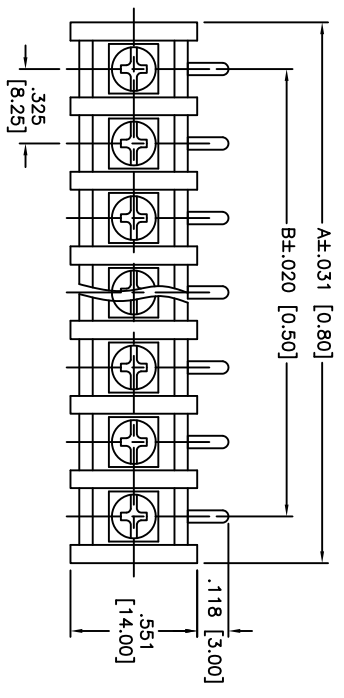

SPECIFICATIONS:
 Material: Nylon66, rated UL 94V-0
 Insulator color: Black
 Contacts: Barss
 Screw: M3.0, Barss, Nickel plated
 Plating: Tin over Copper underplate overall
 Electrical:
 Operation voltage: 300 VAC
 Current rating: 15 Amps
 Mechanical:
 Wire Range: 14-22 Awg
 Screw Torque Value: 10kg-cm
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 2000 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +120°C
 Environmental: Lead free, RoHS Compliant

Positions: 02 thru 32
 A = .325 [8.25] x No. of Spaces + (.405±.031 [10.30±0.80])
 B = .325 [8.25] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ±.10	ØX ±.10
.XX ±.020	ØXXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
 TITLE: .325 [8.25] CENTERLINE BARRIER BLOCK
 RIGHT ANGLE PCB TAILS, BARRIER ENDS
 SIZE: X
 PART NO.: TBD-XX-03-B
 REV: B

