



WR-90 Flexible Straight Waveguide Section 24 Inch Length
with CPR-90G Flange Operating from 8.2 GHz to 12.4 GHz

TECHNICAL DATA SHEET

PE-W90SF006-24

The PE-W90SF006-24 is part of Pasternack's family of flexible, seamless waveguides which operates in the 8.2 to 12.4 GHz range. The waveguide body is made of silver plated brass. It can be bent in both the E and H planes without impairing VSWR or attenuation. The waveguide is covered by a neoprene jacket which protects the waveguide and provides mechanical support.

Features

- WR-90 waveguide
- Flexes in both the E and H plane
- 8.2 GHz to 12.4 GHz Frequency Range
- Brass flanges with a silver plated brass body
- Neoprene sleeve provides added protection and mechanical support

Applications

- Allows expansion/contraction due to thermal issues.
- Test Benches
- Microwave Radio
- Eliminates installation problems caused by misalignment.
- Pressurized waveguide systems
- Provides vibration isolation

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	8.2		12.4	GHz
VSWR		1.07:1		
Insertion Loss		0.18		dB

Mechanical Specifications

Waveguide Size	WR-90
Waveguide Design	Flexible
Section Length	24 in [609.6 mm]
E-Plane Minimum Bend Radius, One Time	0.87 in [22.1 mm]
H-Plane Minimum Bend Radius, One Time	1.69 in [42.93 mm]
Maximum Operating Pressure	45 psig

Description	Flange 1	Waveguide	Flange 2
Interface	CPR-90G	WR-90	CPR-90G
Material	Brass	Copper	Brass
Plating		Silver	
Color	Gold	Black	Gold

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant
REACH Compliant 12/17/2014

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-90 Flexible Straight Waveguide Section 24 Inch Length with CPR-90G Flange Operating from 8.2 GHz to 12.4 GHz PE-W90SF006-24



WR-90 Flexible Straight Waveguide Section 24 Inch Length
with CPR-90G Flange Operating from 8.2 GHz to 12.4 GHz


TECHNICAL DATA SHEET

PE-W90SF006-24

Notes:

- Values at +25 °C, sea level

Power Data

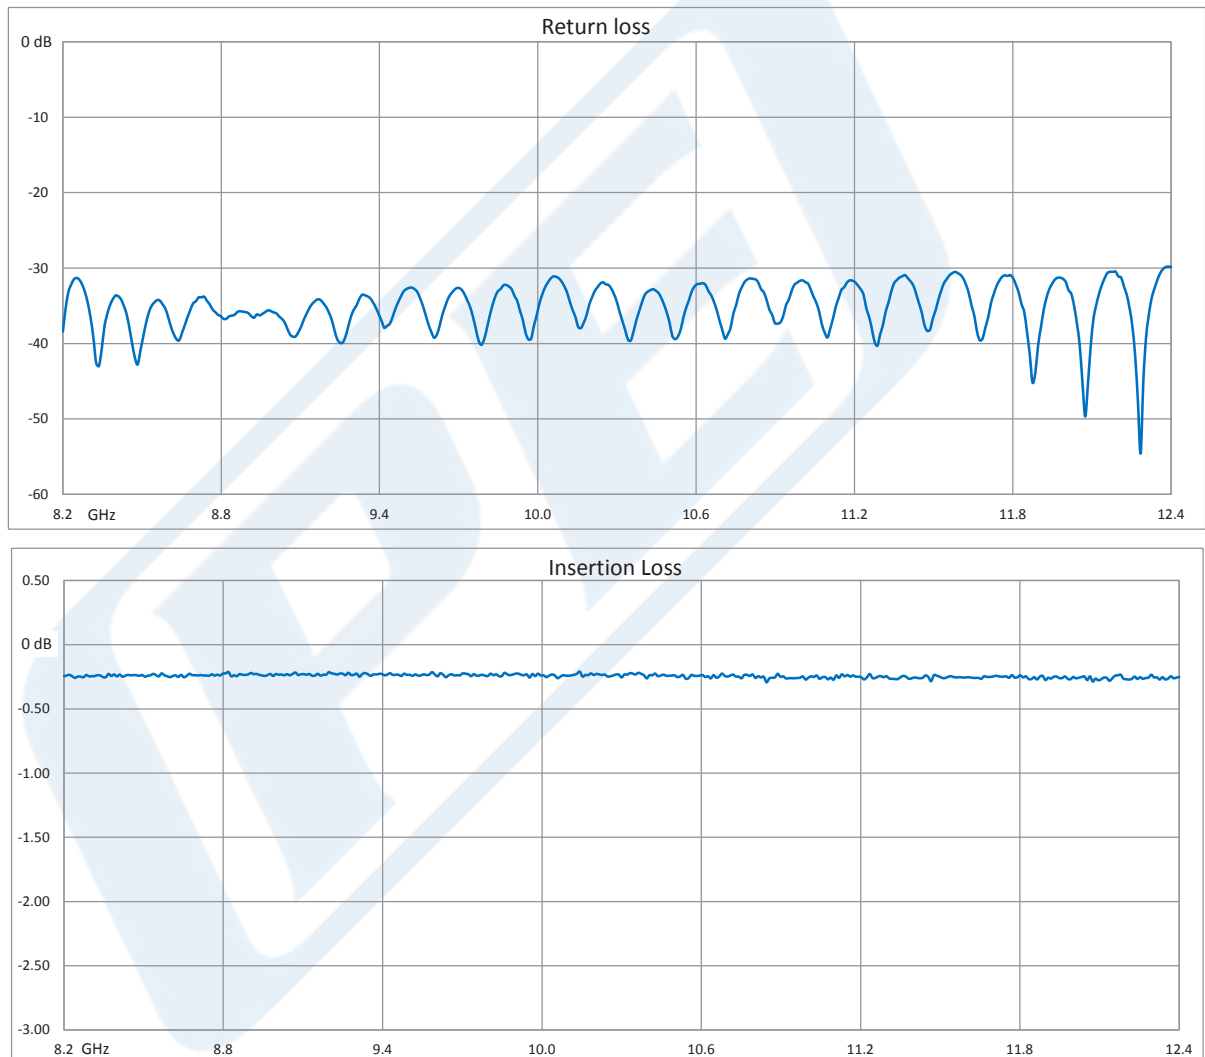

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-90 Flexible Straight Waveguide Section 24 Inch Length with CPR-90G Flange Operating from 8.2 GHz to 12.4 GHz PE-W90SF006-24](#)



WR-90 Flexible Straight Waveguide Section 24 Inch Length
with CPR-90G Flange Operating from 8.2 GHz to 12.4 GHz

TECHNICAL DATA SHEET

PE-W90SF006-24

WR-90 Flexible Straight Waveguide Section 24 Inch Length with CPR-90G Flange Operating from 8.2 GHz to 12.4 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-90 Flexible Straight Waveguide Section 24 Inch Length with CPR-90G Flange Operating from 8.2 GHz to 12.4 GHz PE-W90SF006-24](http://www.pasternack.com/wr-90-straight-waveguide-section-cpr-90g-8.2-12.4-ghz-pe-w90sf006-24-p.aspx)

URL: <http://www.pasternack.com/wr-90-straight-waveguide-section-cpr-90g-8.2-12.4-ghz-pe-w90sf006-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE-W90SF006-24 CAD Drawing

WR-90 Flexible Straight Waveguide Section 24 Inch Length with
CPR-90G Flange Operating from 8.2 GHz to 12.4 GHz

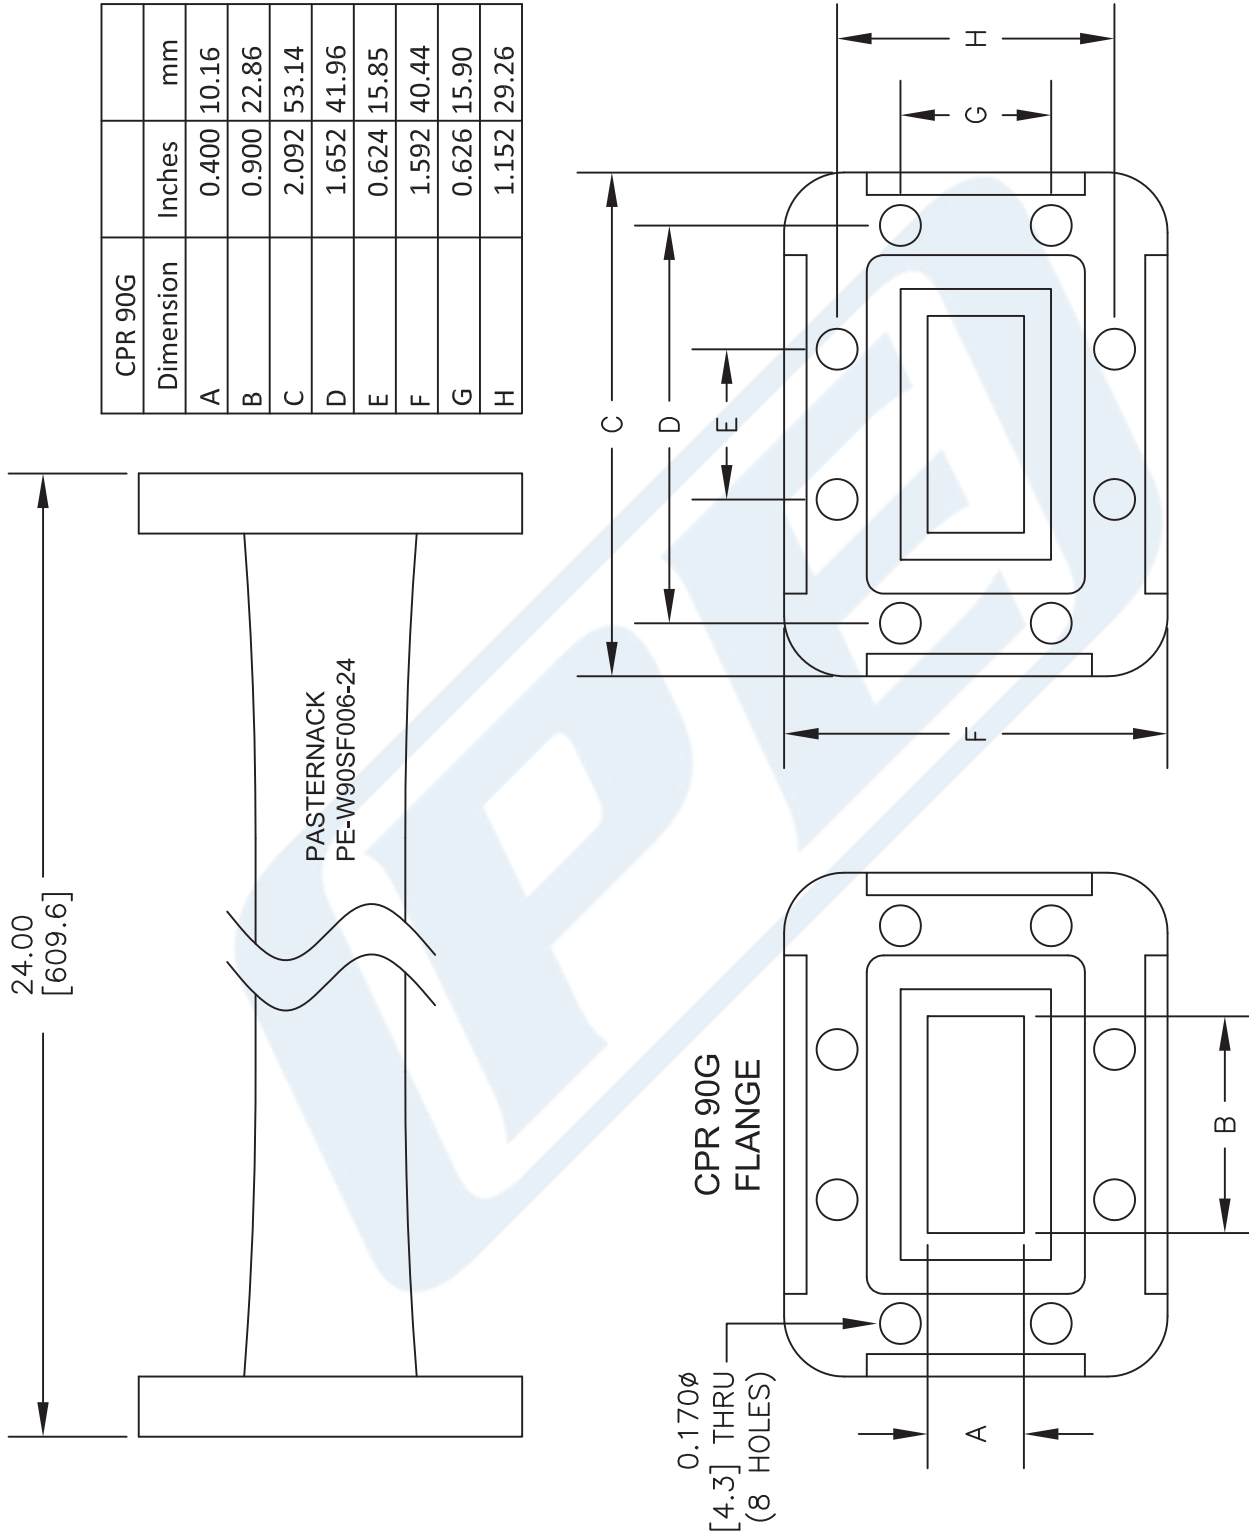

DWG TITLE

PE-W90SF006-24

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 101315

SCALE N/A

SIZE A

2233

PE PASTERNAK
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com