


Circuit Diagram

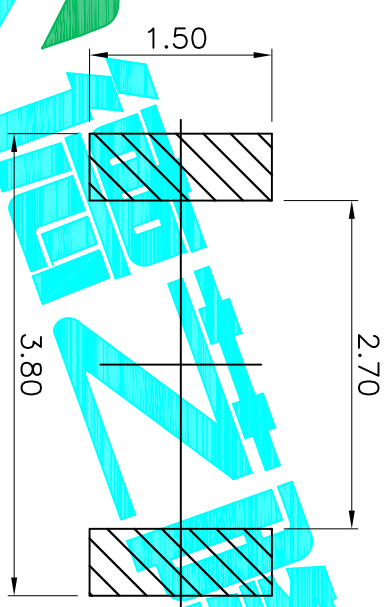

PCB Layout (Pattern Side)

Note:
Travel: 0.15 ± 0.05 mm
Vigor: 200 ± 30 gf

NO.1	
PART NO	vigor
070	70±30
100	100±50
160	160±50
250	250±50
320	320±80
350	350±80
520	520±130

⑥	Cover	1	SUS	Natural
⑤	Knob	1	LCP	Black
④	Dust Cover	1	Kapton Film	Yellow
③	Contact	1	SUS	Plating silver
②	Base	1	LCP	Black
①	Terminal	2	Phosphor Bronze/Plating silver	
ITEM	PART NAME	QTY.	MATERIAL	FINISHING

APPROVALS		DATE	TITLE:	
DRAWN	G.M.Chen	2015/5/19	ELECTRONICS CO.,LTD	
CHECKED			TACT SWITCHES	
APPROVALS			PART NO. TD-1620SR-XXX	
DRAWN		DATE	SCALE: 1:1	
CHECKED			SHEET 1 OF 1	
APPROVALS			PROJ.	
TOLERANCES ARE				
30 ^{±0.15}	±0.30	ANGLE		
10 ^{±0.10}	±0.20	UNIT: mm		
5 ^{±0.10}	±0.15	DRAWING NO.		
~ 5	±0.10			

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW