

Type: CLS74


◆ Product Description

- 8.3×8.3mm Max.(L×W), 5.2mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.


◆ Feature

- Magnetically shielded construction.
- Ideally used in power supply of DSC, Note PC and DVC.
- RoHS Compliance


◆ Dimensions (mm)

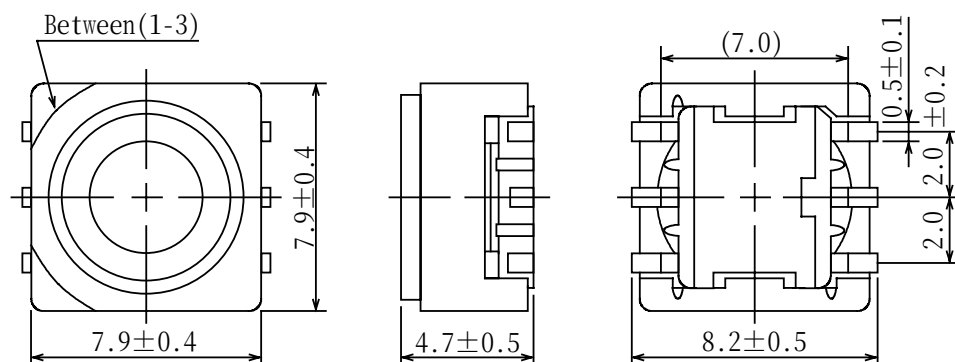

◆ Schematics (Bottom)



◆ Land Pattern (mm)

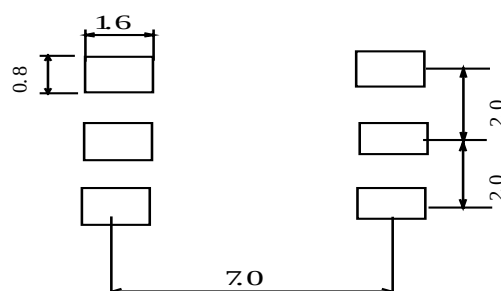

◆ Specification

Sample No.	Inductance (1-3) 1kHz/1V	D.C.R. (1-3) @20°C	Rated current (1-3)
6322-T019	250 μ H $\pm$ 35%	2.0 Ω Max.	160mA

※ Rated current: The D.C. current at which the inductance decreases to 90% of it's initial value or When $\Delta t=40^{\circ}\text{C}$, whichever is lower($T_a=20^{\circ}\text{C}$).