



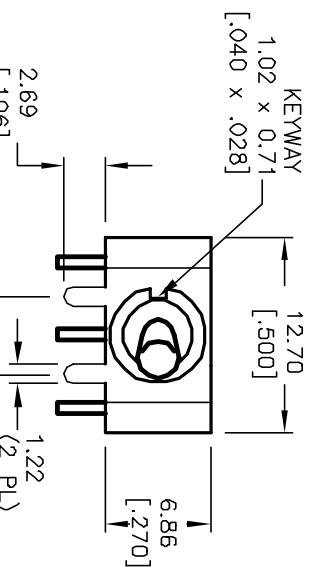

SWITCH FUNCTION

Technical drawing of the E-Switch Logo. The drawing shows a 25° tapered shaft with three positions labeled POS. 1, POS. 2, and POS. 3. The shaft is mounted on a base labeled E-SWITCH LOGO. The drawing includes a 25° angle dimension and a dashed line indicating the shaft's profile.

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X, X = \pm 0.4$
 $X, XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) Max. @20V (AC or DC)
5. FIXED TERM. & MOVING CONTACT:
COPPER ALLOY W/GOLD plate over
Nickel plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles
at full load

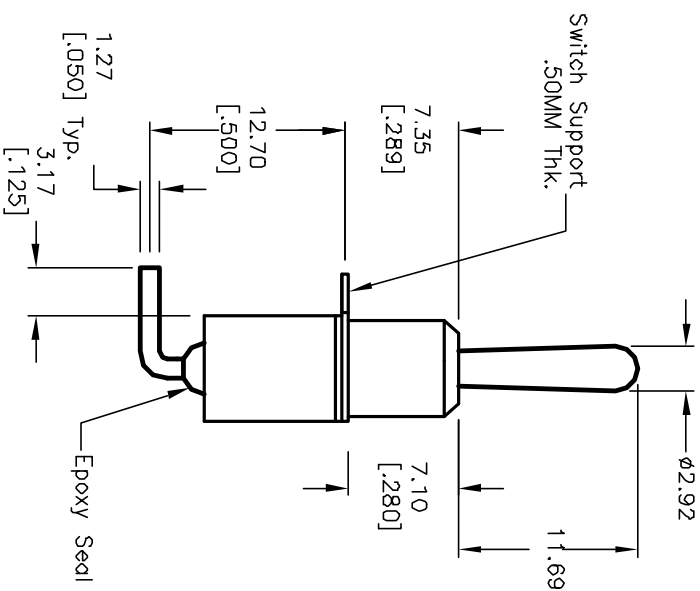

TITLE				100 SP-3 T1 B4 M6 R E (GOLD CONTACTS)			
SCALE	DATE	DR	DWG	REV			
2:1	5/3/02	CJB	T113029	D			