



SHEET OF

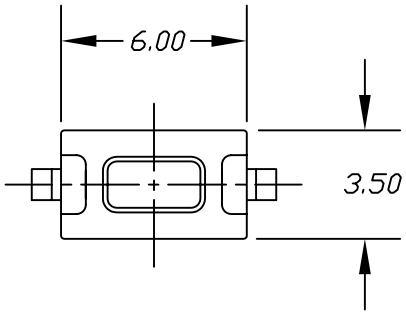


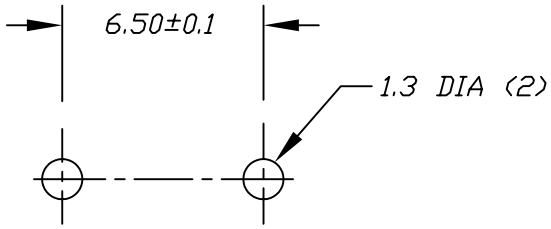

RECOMMEND P.C.B. HOLES

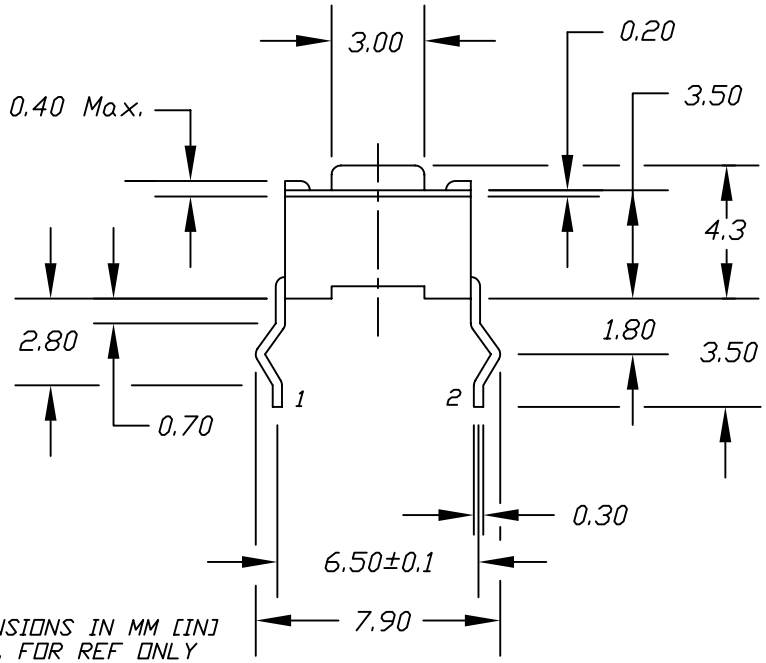

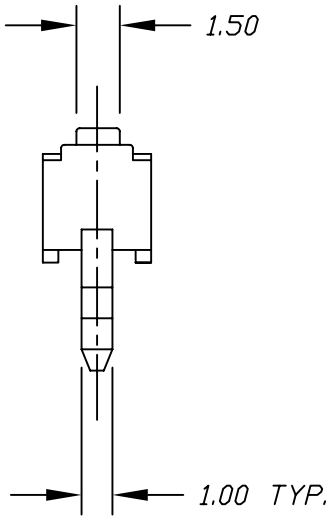



CIRCUIT: SPST

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [IN]
2. TERM. NOS. FOR REF ONLY
3. RATING: DC 12V, 50mA
4. TRAVEL: 0.25±0.1mm
5. CONTACT RESISTANCE: 100m Ohms Max.
6. MECHANICAL/ELECTRICAL LIFE: 40,000 CYCLES
7. PACKAGE: BULK, 1,000 PCS PER BAG
8. 2002/95/EC (ROHS) COMPLIANT
9. OPERATING FORCE: 130± 50gf

REV.	DESCRIPTION	DATE	CHKD
C	UPDATED NOTES, ADD Q TO TITLE	11/9/2006	TN
B	REVISED & REDRAWN		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TOLERANCES: ±0.4 / ±0.25; 0.0 / 0.00

E-SWITCH®

TITLE: TL1107AF130WQ

SCALE	DATE	DR	DWG	REV
4:1	11/9/2006	TN	P010312	C