



Frontier Electronics Corp.

667 E. COCHRAN STREET, SIMI VALLEY, CA 93065

TEL: (805) 522-9998 FAX: (805) 522-9989

E-mail: frontiersales@frontierusa.com

Web: <http://www.frontierusa.com>

40A HIGH CURRENT SILICON BRIDGE RECTIFIERS


BP40-005G THRU BP40-10G

FEATURES

- GLASS PASSIVATED CHIP JUNCTION
- CURRENT RATING 40A
- REVERSE VOLTAGE RATING UP TO 1000V
- TYPICAL IR LESS THAN 1 μ A
- HIGH TEMPERATURE SOLDERING:
260°C /10 SECOND
- GLASS PASSIVATED CHIP JUNCTION

MECHANICAL DATA

- CASE: METAL HEAT SINK CASE, ELECTRICALLY INSULATED
- TERMINALS: UNIVERSAL .25" (6.3mm) FAST ON DIMENSIONS IN INCHES AND (MILLIMETERS)
- MOUNTING METHOD: BOLT DOWN ON HEAT SINK WITH SILICON THERMAL COMPOUND BETWEEN BRIDGE AND MOUNTING SURFACE FOR MAXIMUM HEAT TRANSFER EFFICIENCY
- WEIGHT: 20 GRAMS

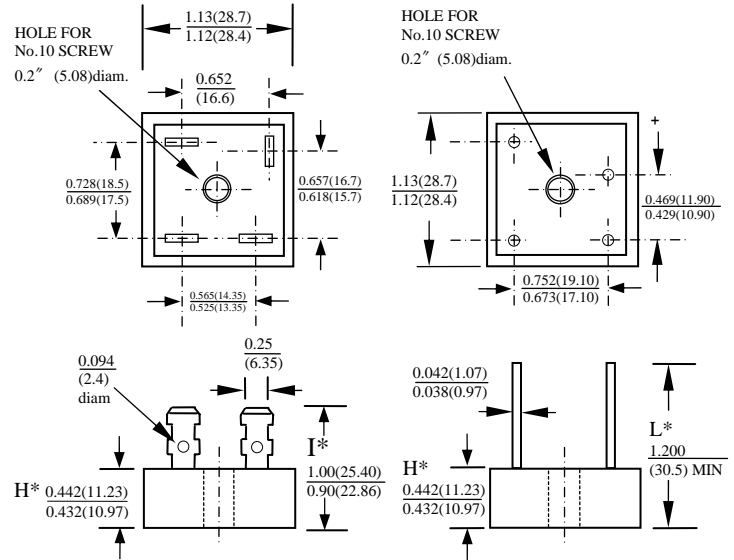

DIM	MIN	MAX	REMARK
H*	0.295(7.5)	0.311(7.9)	SUFFIX "S" THIN CASE
I*	0.74(18.80)	0.84(21.30)	SUFFIX "S" THIN CASE
L*	1.09(27.89)	-	SUFFIX "S" THIN CASE

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS, RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD. FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	BP40-005G	BP40-01G	BP40-02G	BP40-04G	BP40-06G	BP40-08G	BP40-10G	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	50	100	200	400	600	800	1000	V
MAXIMUM RMS VOLTAGE	V_{RMS}	35	70	140	280	420	560	700	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	50	100	200	400	600	800	1000	V
MAXIMUM AVERAGE FORWARD RECTIFIED OUTPUT CURRENT AT TC=55°C	I_O	40.0							A
PEAK FORWARD SURGE CURRENT SINGLE SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	400							A
STORAGE TEMPERATURE RANGE	T_{STG}	- 55 TO + 175							°C
OPERATING TEMPERATURE RANGE	T_{OP}	- 55 TO + 175							°C

ELECTRICAL CHARACTERISTICS ($A_T T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	BP40-005G	BP40-01G	BP40-02G	BP40-04G	BP40-06G	BP40-08G	BP40-10G	UNITS
MAXIMUM INSTANTANEOUS FORWARD VOLTAGE PER BRIDGE ELEMENT AT SPECIFIED CURRENT	V_F	1.1							V
MAXIMUM REVERSE DC CURRENT AT RATE DC BLOCKING VOLTAGE PER ELEMENT	I_R	10							μ A

NOTE: Suffix No. Versus Different Cases and Terminals

SUFFIX No / TERMINAL	CASE			
	NORMAL METAL CASE	THIN METAL CASE	NORMAL PLASTIC CASE ALUMINUM BASE	THIN PLASTIC CASE ALUMINUM BASE
FAST ON TERMINALS	NO SUFFIX	S	P	PS
WIRE LEAD TERMINALS	W	WS	PW	PWS
IN LINE PIN CONFIGURATION	-	-	L	LS

RATINGS AND CHARACTERISTIC CURVES BP40-005G THRU BP40-10G

FIG. 1 - MAXIMUM OUTPUT RECTIFIED CURRENT

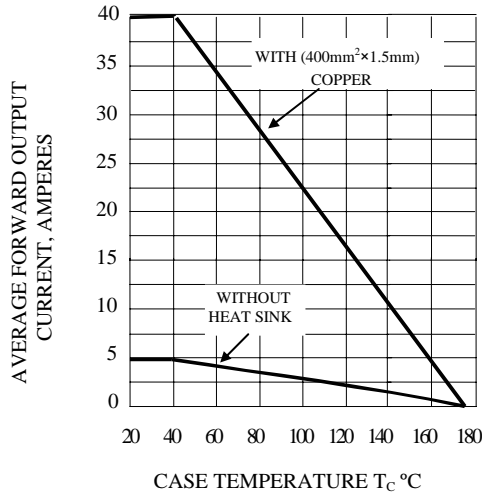


FIG. 2 - TYPICAL REVERSE CHARACTERISTICS AT $T_j=25^\circ\text{C}$

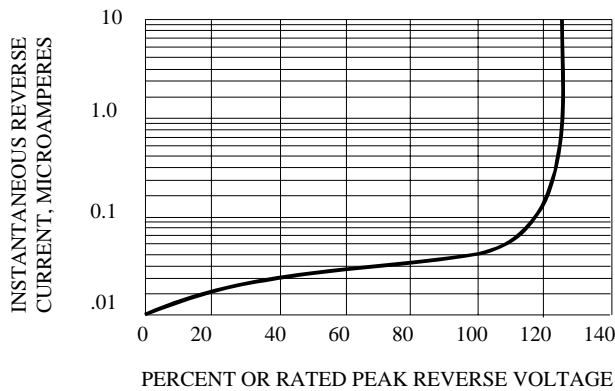


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

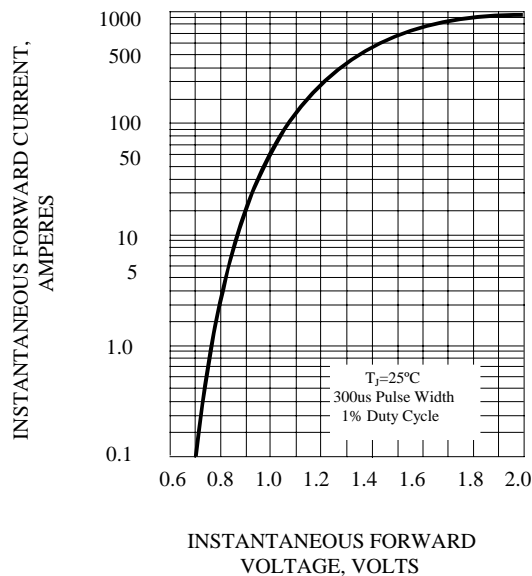


FIG. 4 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT



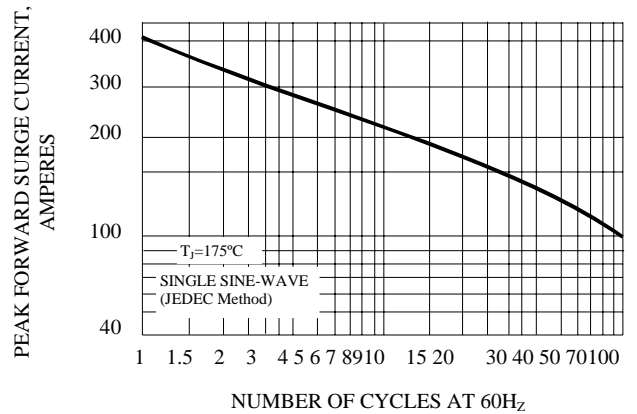


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

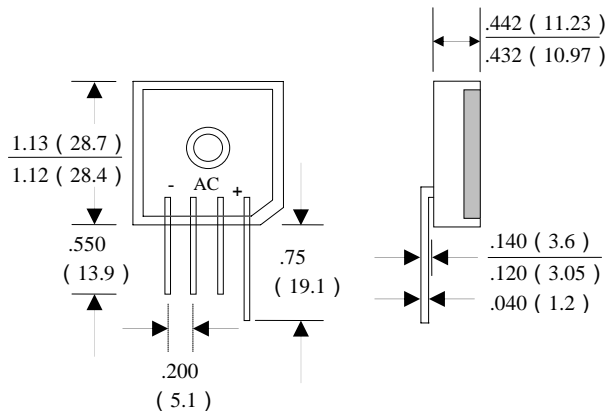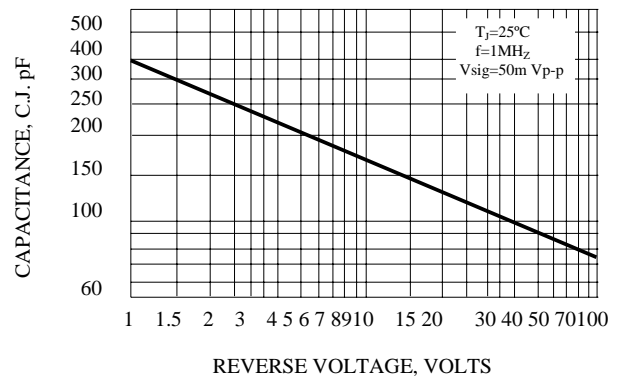

BP35-L IN LINE PIN CONFIGURATION (PLASTIC CASE)