



LOC		DIST		REVISIONS						
CM		00		P	LTR	DESCRIPTION	DATE	DWN	APVD	
					B3	REVISED PER ECR-16-003704	12MAR2016	NK	DC	


- 1 FINISH: 0.8µM PRE-TIN OVER 0.5µM MIN COPPER.
- 2 WIRE RANGE: 20-16 AWG.
- 3 CONTACTS COATED WITH ANTI-FRETTING LUBRICANT.
- 4 STRIP DIRECTION OFF TOP OF THE REEL, ACC. TO TE SPEC. 107-3 FIG. 1

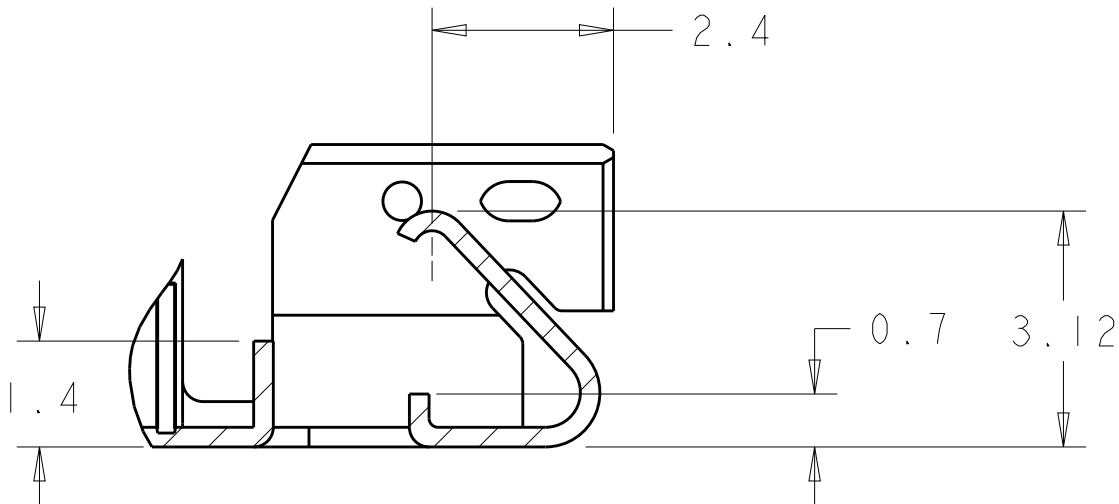





SECTION C-C

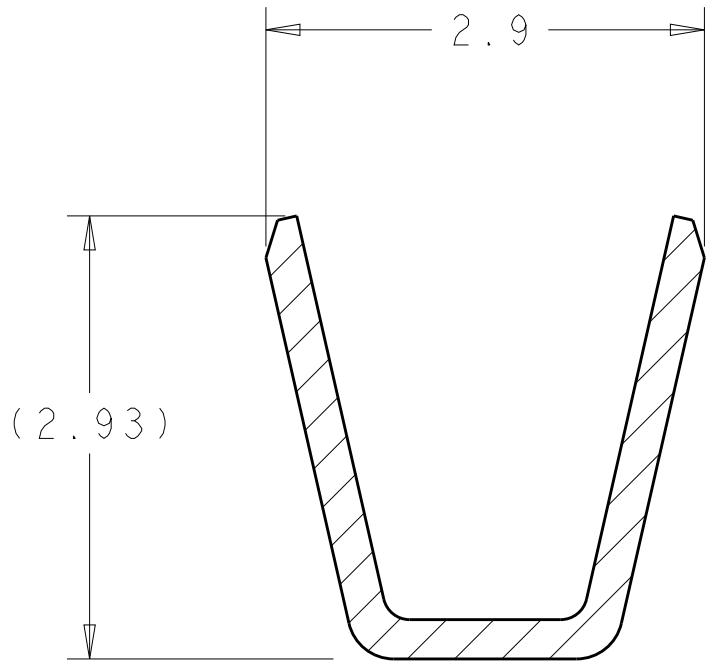

SECTION A-A
SCALE 20:1

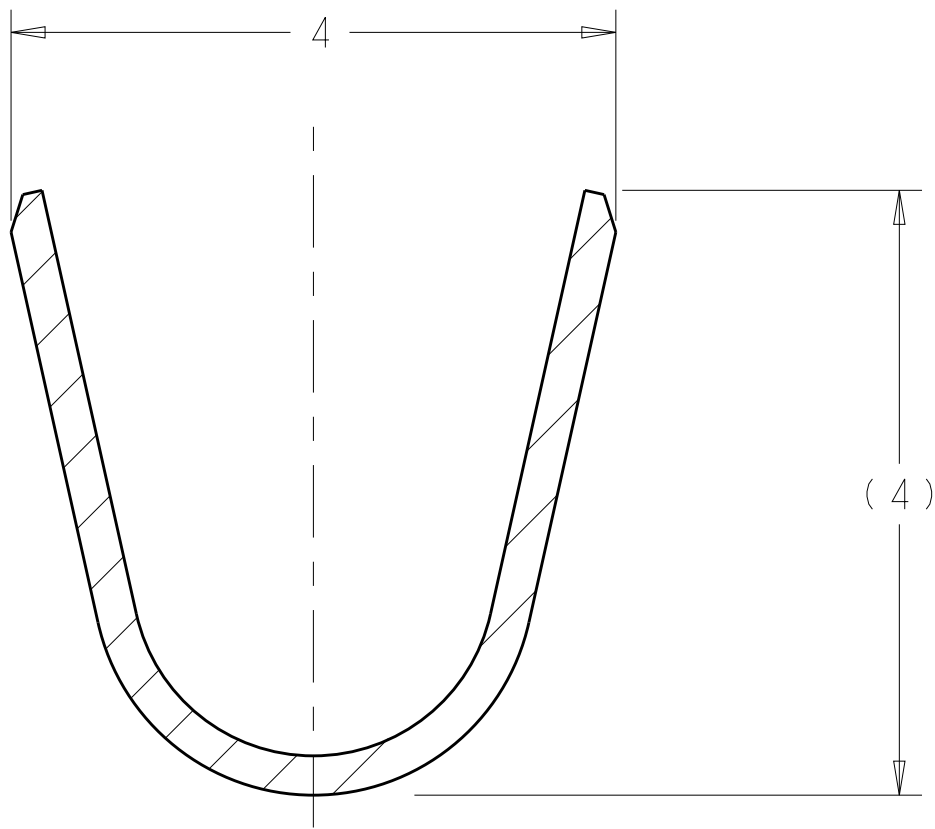

SECTION B-B
SCALE 20:1

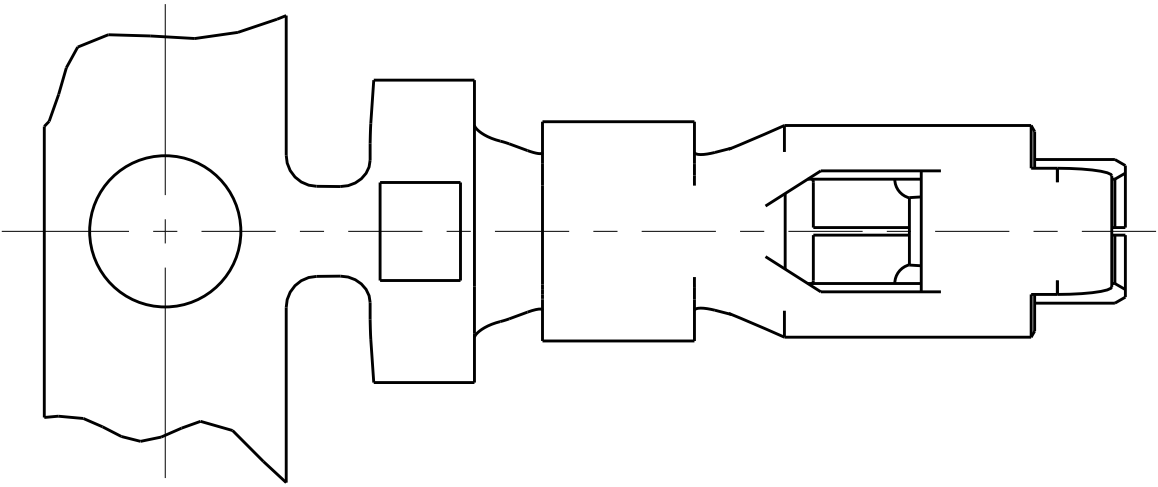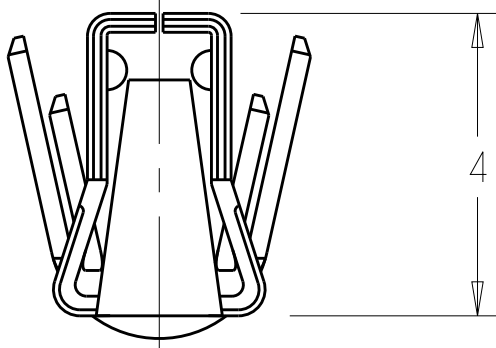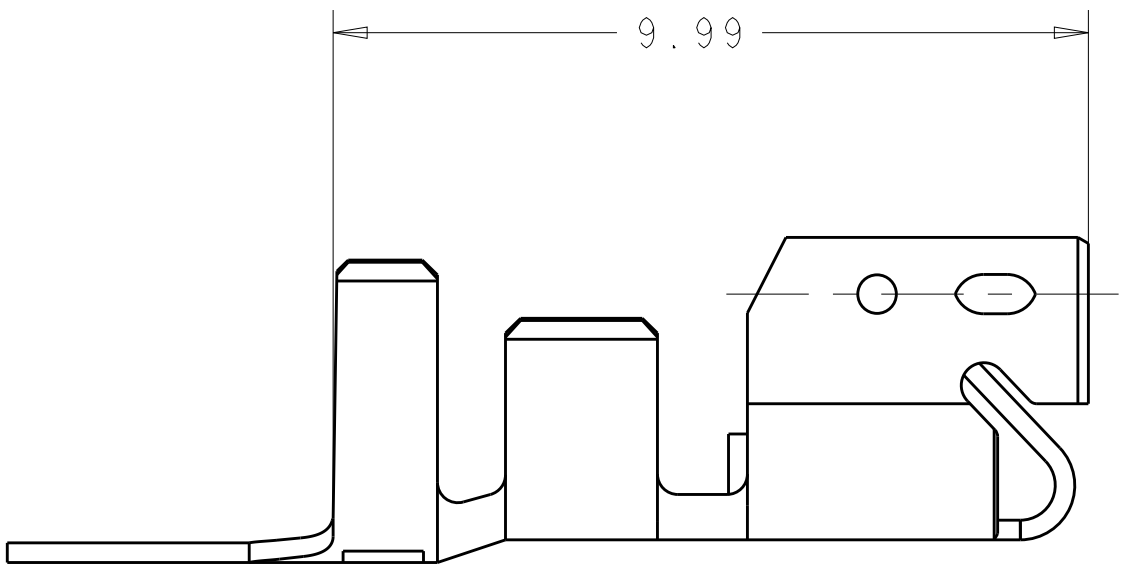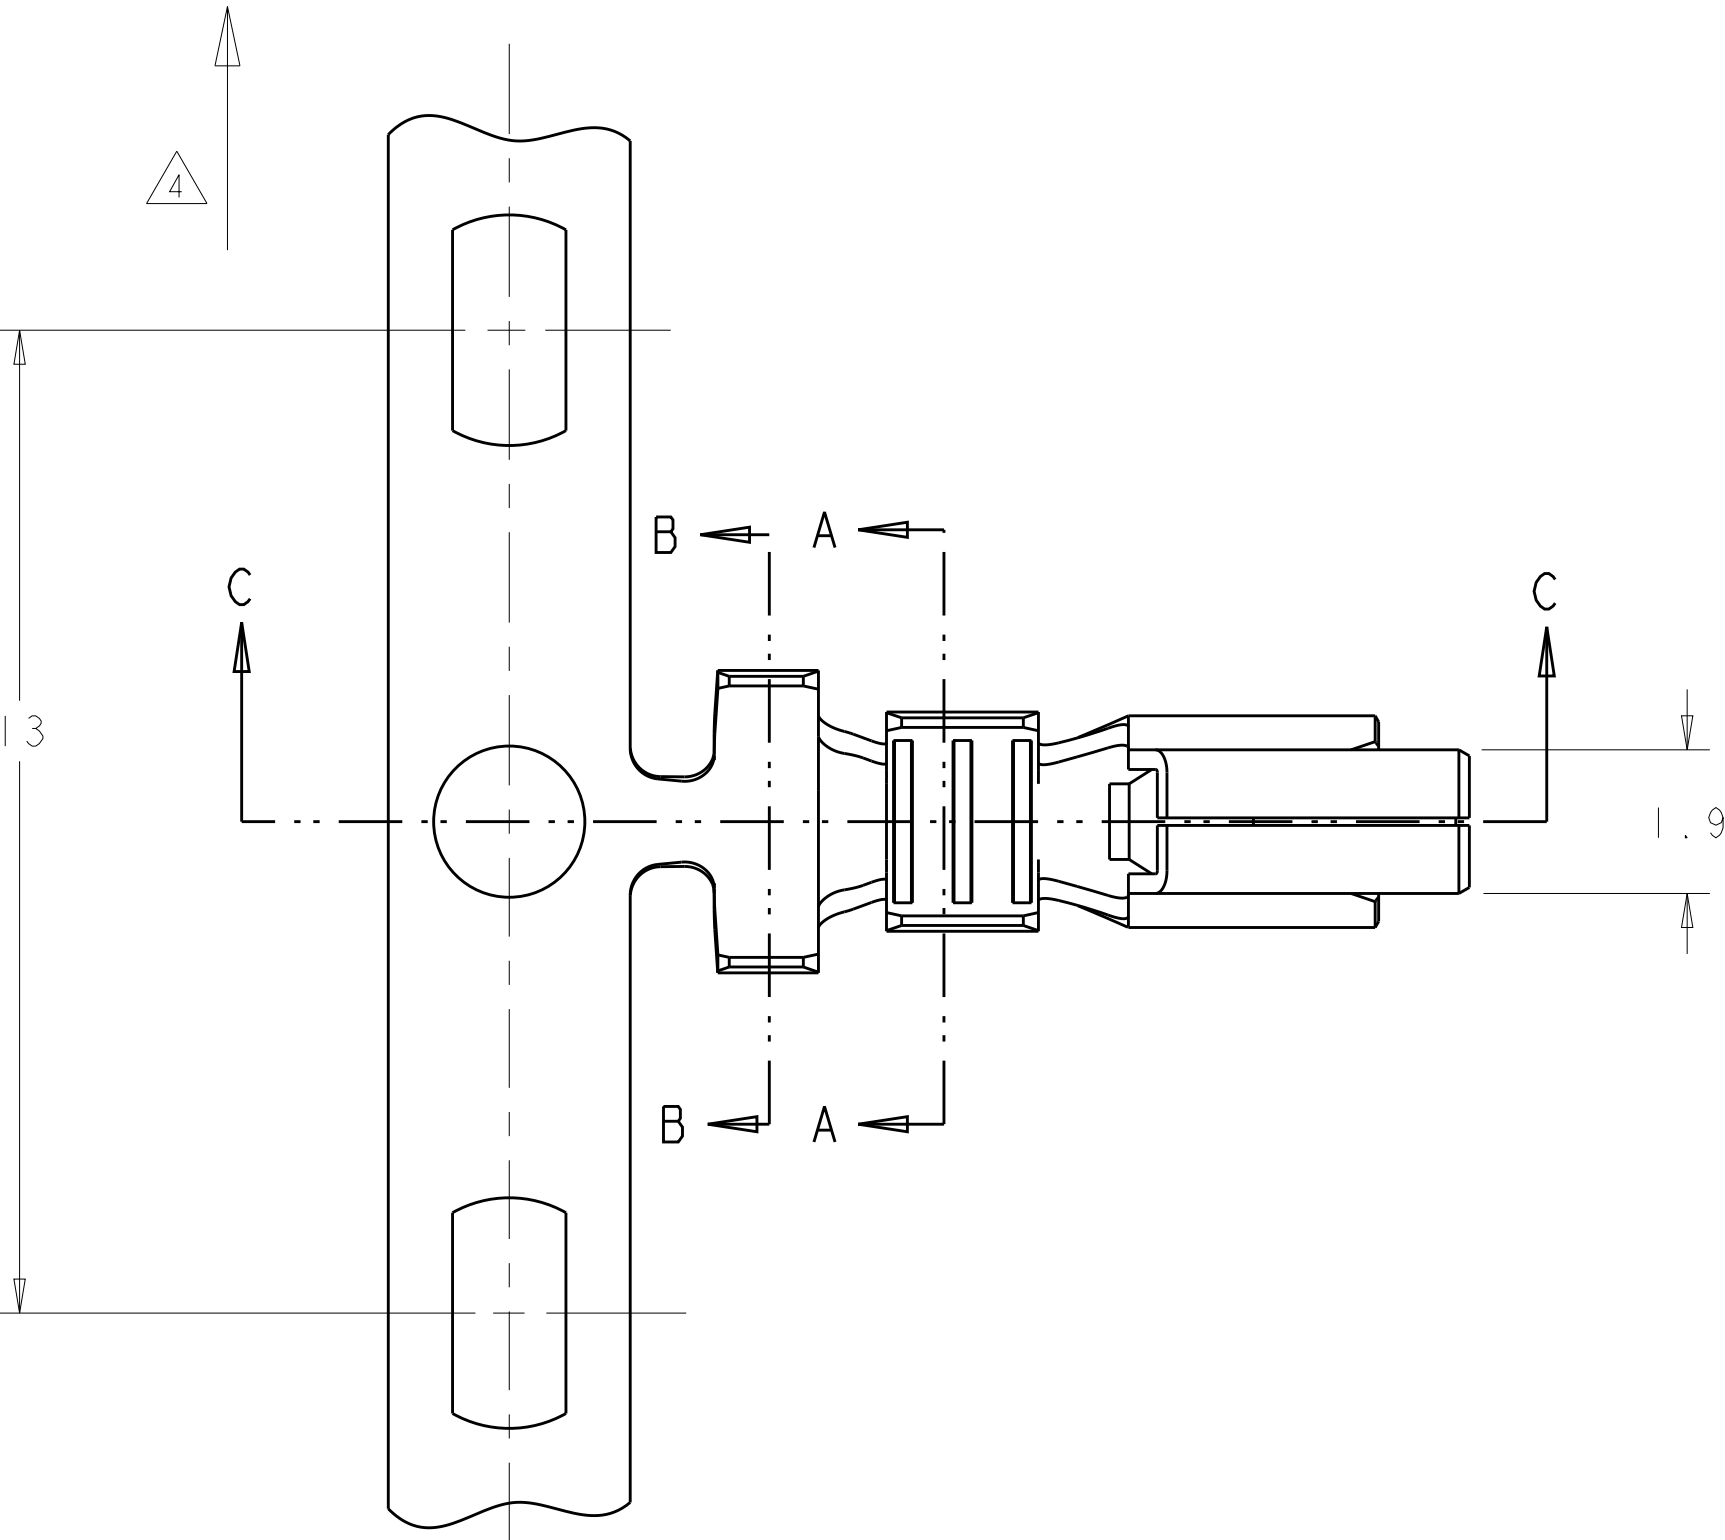

	PHOS BRONZE	1744201-1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 05APR2005	TE Connectivity	
DIMENSIONS:		CHK J. ELLIS 05APR2005	NAME	
mm		APVD J. ELLIS 05APR2005	CONTACT, LANCELESS, STD, ECONOMY POWER 11	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	SIZE	
0 PLC ±.1		108-2297	CAGE CODE	
1 PLC ±.1		APPLICATION SPEC	DRAWING NO	
2 PLC ±.1		114-13265	RESTRICTED TO	
3 PLC ±.15		WEIGHT	A100779	
4 PLC ±.1		CUSTOMER DRAWING	C=1744201	
ANGLES		SCALE	10:1	
FINISH		SHEET	1 OF 1	
SEE TABLE		REV	B3	