

**Models 5113A  
XLR (F) 3-Pin Rectangular Flanged Panel Mount**



Model 5113A XLR (F) 3-pin rectangular flanged mount

Protect contacts and absorb vibrations in your audio applications

**Features**

- 3-pin XLR panel mount receptacle with sturdy all metal one piece design
- Solder cup terminations
- Low contact resistance
- Front mountable

**Materials**

- Housing is die-cast zinc alloy with tarnish resistant nickel plating.
- Contacts are bronze with tin finish (Ground tab is steel).

**Ordering Information**


Model: 5113A.

**USA:** Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**e-mail:** [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

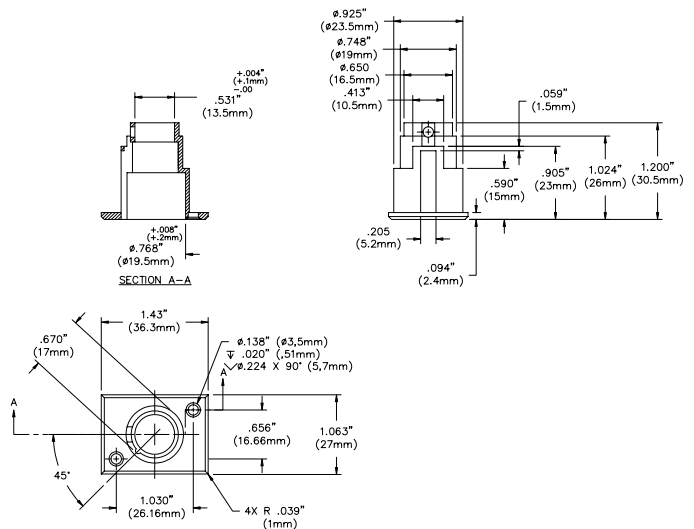

**Specifications**

|                     |                                    |
|---------------------|------------------------------------|
| Number of contacts  | 3                                  |
| Contact resistance  | < 5 mΩ                             |
| Dielectric strength | 1500 V dc                          |
| Wire size (AWG)     | 14 AWG (2.5 mm <sup>2</sup> ) max. |

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.