
Extract from the online catalog

HC-M-MHR-T6-N

Order No.: 1679278

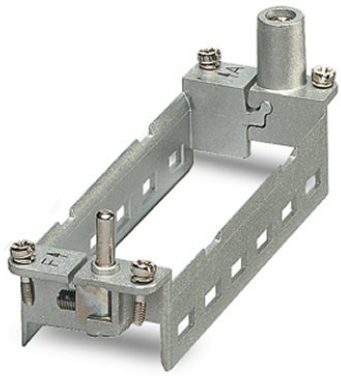

http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1679278

HEAVYCON hinged retaining frame, for HC-B 24 sleeve housing, for 6 modules, labeling with upper case letters (A, B, C, etc.)

Product notes

WEEE/RoHS-compliant since: 04/13/2006

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Commercial data

GTIN (EAN)	4 017918 162566
sales group	D041
Pack	2 pcs.
Customs tariff	85369010
Catalog page information	Page 464 (PC-2009)

Technical data

Electrical characteristics

Note	Hinged retaining frame
Ambient temperature (operation)	-40 °C ... 125 °C

Mechanical characteristics

Conductor cross-section	4 mm² ... 6 mm² (for PE conductor – power side)

	1 mm² ... 2.5 mm² (for PE conductor – control side)
Connection cross-section AWG	12 ... 10 (for PE conductor – power side)
	18 ... 14 (for PE conductor – control side)
Insertion/withdrawal cycles	≥ 500

General characteristics

Number of module slots	6
Assembly instructions	HC-MHR-PE16 (1636981) for PE connection extension to 16 mm^2.

Material data

Contact carrier material	Die-cast zinc alloy

Certificates / Approvals


Certification	GOST

Accessories

Item	Designation	Description
General		
1585155	HC-M-MHR-FIX	Fixing wedge to fix the hinged retaining frame (20 wedges on the block)
Plug/Adapter		
1636981	HC-M-MHR-PE16	Cable lug for HEAVYCON-MODULAR; PE connection extension to 16 mm^2, for crimping with crimp pliers

Diagrams/Drawings

Dimensioned drawing

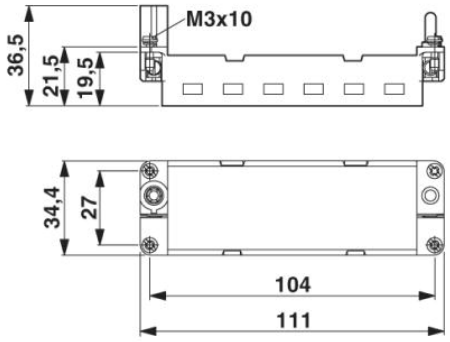

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg,Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
http://www.phoenixcontact.de

© 2010 Phoenix Contact
Technical modifications reserved;