



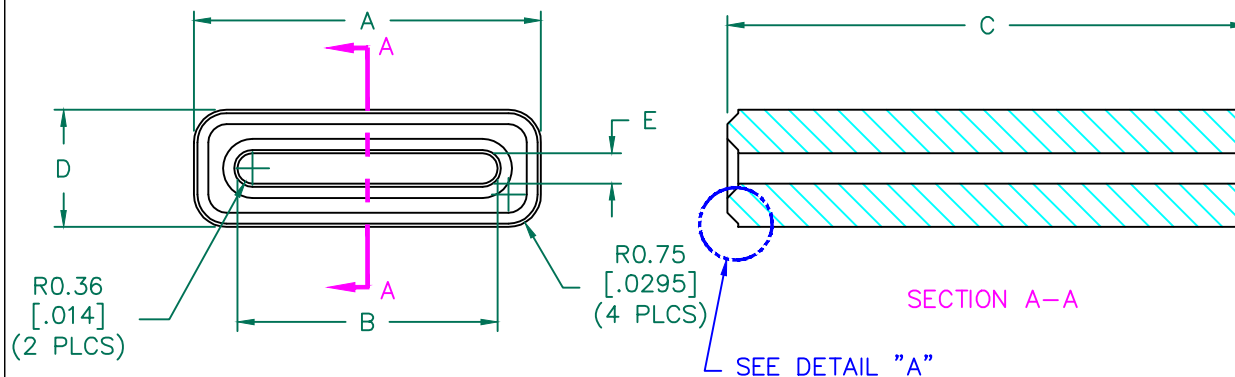


IMPEDANCE (Z)			
Frequency	25 MHz	100 MHz	300 MHz
Nominal (REF)	48 Ω	102 Ω	250 Ω
Minimum	- Ω	82 Ω	- Ω

Z vs. FREQUENCY
(REF. ONLY)

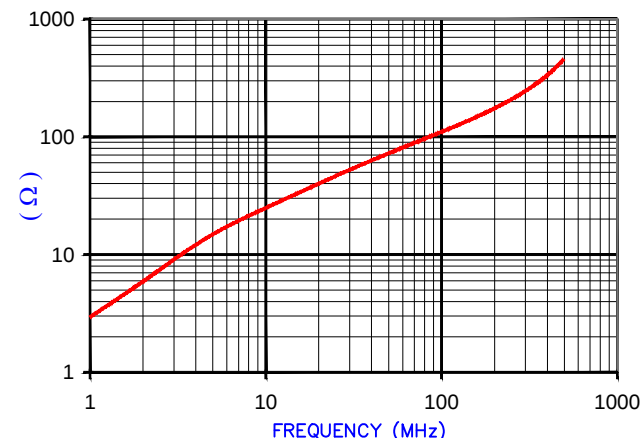

AGILENT E4991A Impedance/Material Analyzer
HP 16092A-Test Fixture. TEST REF. 2949



DETAIL "A"
CHAMFER
SCALE=18:1

**UNCONTROLLED
DOCUMENT**


NOTES: UNLESS OTHERWISE SPECIFIED

1. COSMETIC SPECIFICATION REFER TO WI-QA-038.

FERRITE CORE DIMENSIONS (SPEC): mm [in]

A	8.00 [.315]	+	0.25 [.010]
B	6.00 [.236]	+	0.20 [.008]
C	12.00 [.472]	+	0.25 [.010]
D	2.70 [.106]	+	0.20 [.008]
E	0.70 [.028]	+	0.15 [.006]

WEIGHT/1000 0.99 kgs [2.19 Lbs]

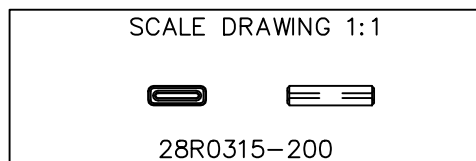

DIMENSIONS ARE IN mm[INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
F	UPDATE COMPANY LOGO	05/25/15	QIU	PROJECT/PART NUMBER: 28R0315-200			
E	CHANGE MIN Z SPEC UPDATE LOGO	07/25/07	JRK				
D	CHANGE LAST REVISION DESCRIPTION	02/17/04	TMB	SCALE: 6 : 1			
C	CHANGE 100MHz MIN VALUE AND ADD TEST REF. # FOR Z vs FREQ CURVE	01/19/04	TMB				
B	CHANGE PRINT FORMAT CHANGE Z SPECS	05/05/03	TMB	MATERIAL: FERRITE			
A	ORIGINAL DRAFT	10/21/02	TMB				
REV	DESCRIPTION	DATE	INT	TOOL # R0315			