



## P/N: AD-2047 DATA SHEET

## Feature



- Recommended by Analog Devices for use with ADSL Chipset.
- Operating temperature range: 0 to +60 .
- Storage temperature range: -25 to +75 .


## Electrical Specifications @ 25°C

Part Number	Mounting	Turn Ratio (±2%) (1-4):(10-7),(2+3,8+9)short	OCL (mH ±5%) @ 10KHz/0.1 V	Leakage Inductance (uH Max) @ 100 KHz/0.1V	Longitudinal Balance (dB Min)
			(1-4),(2+3)short	(1-4),(2+3,10+7, 8+9)short	10KHz-1MHz
AD-2047	THT	2:1	1.5	15.0	-50


## Additional Specifications

Part Number	DC Resistance ( Max)		Inter-winding Capacitance (pF Max) @ 100KHz/0.1V	Isolation Voltage (Vrms)
	(1-3),(2+4)	(10-7),(8+9)	(1-10),(2+3,8+9)short	
AD-2047	1.22	0.5	40	1500

## Schematic

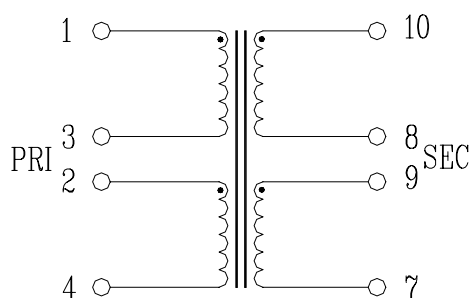

## Mechanical

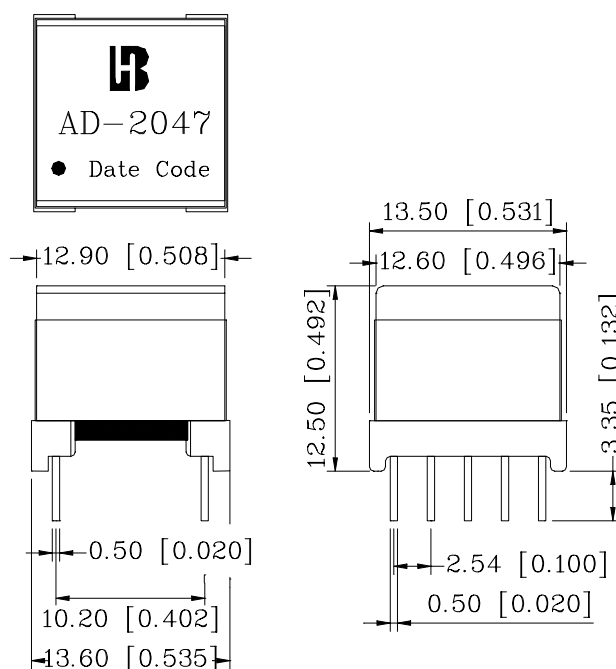

Units: mm [Inches] Tolerances: xx.x0±0.25 [0.010]  
0.xx±0.05 [0.002]