
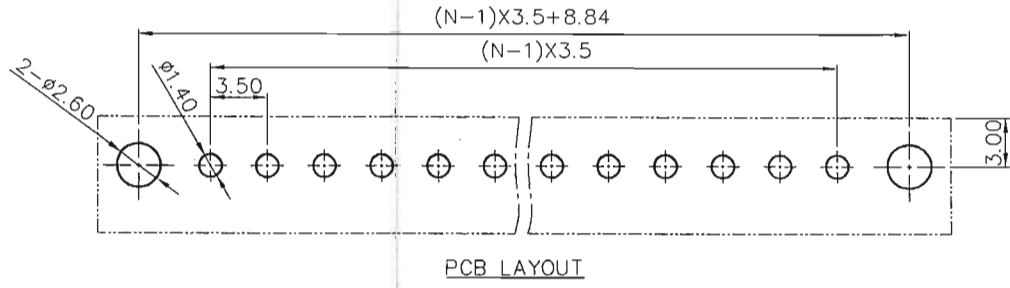
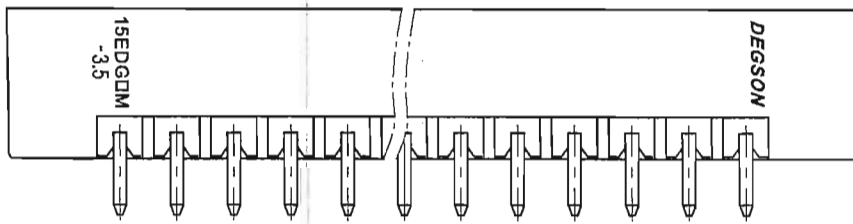
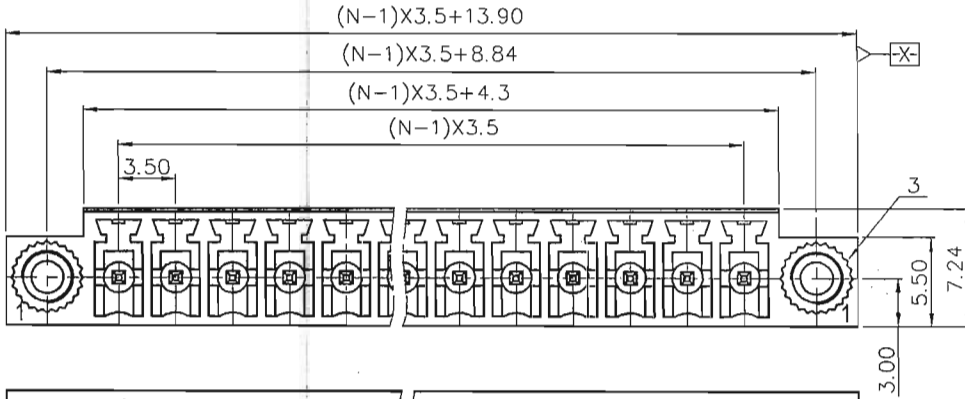
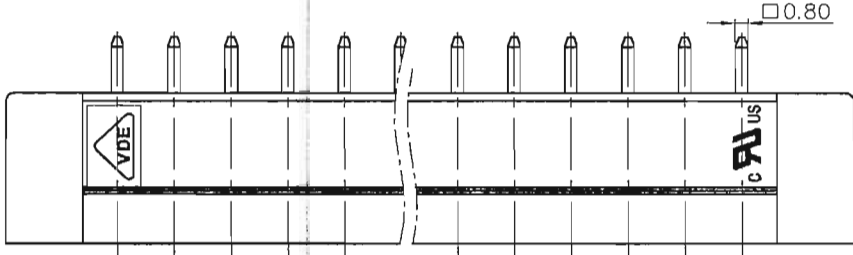


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

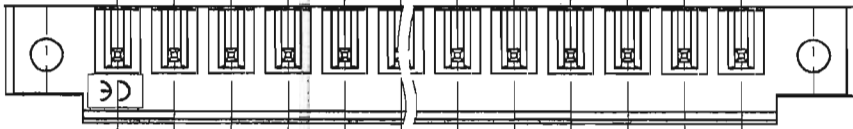


NOTES1:
 UL Standard
 1. Rated Voltage/Current : 300V / 8A
 2. Withstanding Voltage : AC1600V/1Min.
 VDE Standard
 1.

Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 3.50mm, Poles : N=2~22P
 3. Operating temperature: -40°C~+105°C
 4. Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range In mm				Tolerance		
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10	<	
To 6	To 10	To 30	To 60	To 100	To 150			
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

5. RoHS Compliance



3	SCREW CAP	BRASS	
2	PIN	BRASS	Sn Plated
1	HOUSING	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

PART NO.: /

APPD: *Aaron/olya*

CHKD: *Xm19/15*

DRFT: Yz 10/13/15"

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 15EDGVM-3.5-XXP-1Y-00A(H)

TITLE: CUSTOMER DRAWING

DRAWING NO.: 15EDGVM-3.5-C01

THIRD ANGLE PROJECTION

REV	T0
SHEET	1/1
SCALE	1:1

DO NOT SCALE DRAWING