


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

M39012/30-0118

REVISIONS	
ISSUE	CHANGES
2	ER 34778 E REDRAWN KH 07/14/93
3	CN 38246 C BDH 03/12/01
4	CN 39923 C DCT 5/9/7

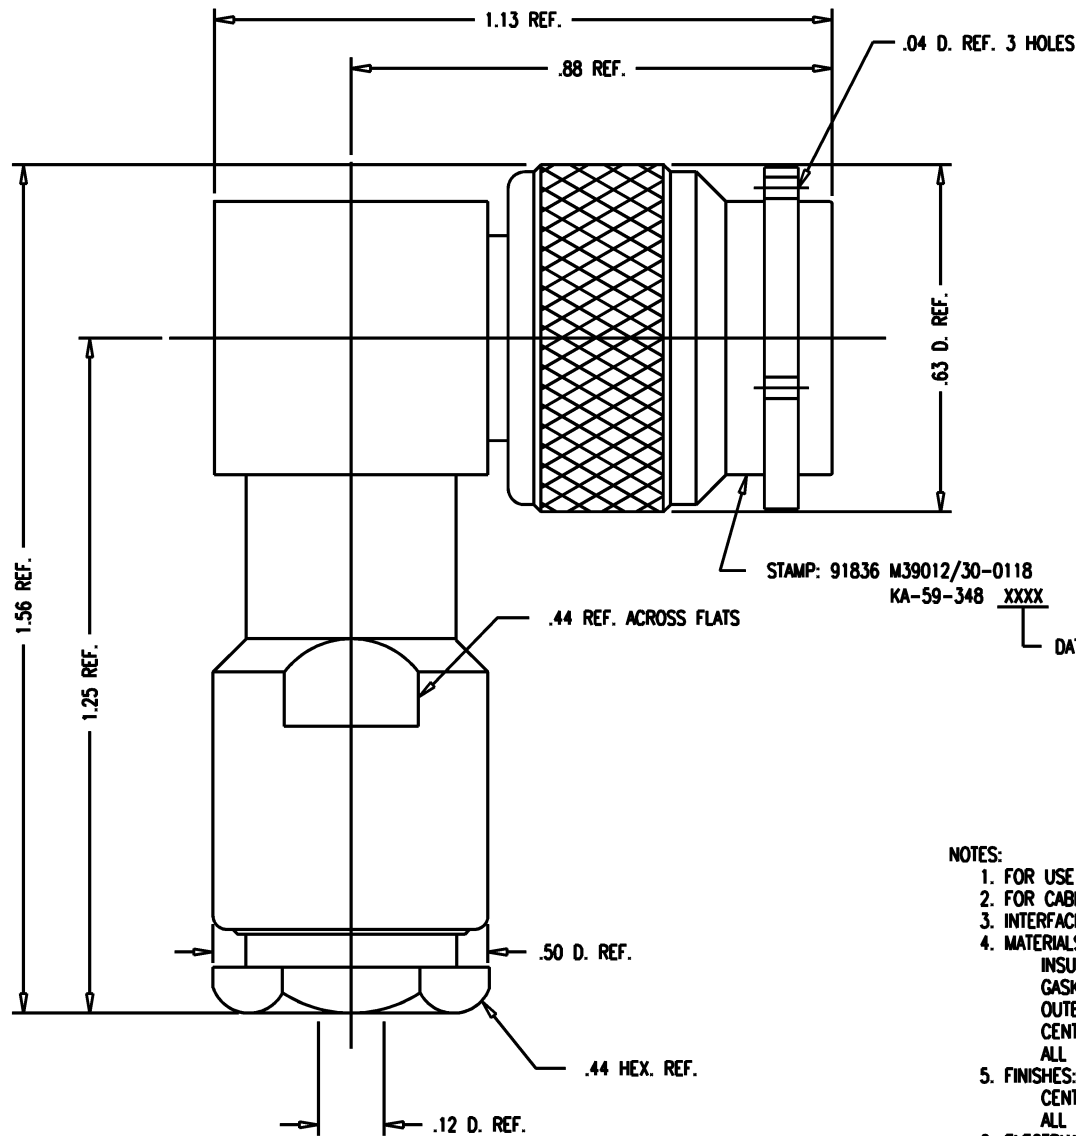

- NOTES:
- FOR USE WITH RG-316 & 174/U CABLES.
 - FOR CABLING INSTRUCTIONS SEE CP-1050.
 - INTERFACE PER MIL-STD-348, FIG. 313-1.
 - MATERIALS:
 INSULATORS-TEFLON, ASTM-D4894
 GASKETS-SILICONE RUBBER, A-A-59588
 OUTER CONTACT } BER. COP., ASTM-B-196
 CENTER CONTACT F }
 ALL OTHER METAL PARTS-BRASS, ASTM-B16
 - FINISHES:
 CENTER CONTACTS-GOLD PLATE PER ASTM-B488
 ALL OTHER METAL PARTS-SILVER PLATE PER ASTM-B700
 - ELECTRIAL CHARACTERISTICS:
 NOMINAL IMPEDANCE-50 OHMS
 FREQUENCY RANGE-DC TO 11 GHz
 WORKING VOLTAGE-500 VRMS

SCALE 4:1	
APPROX SURFACE AREA	
KA-59-348	
USED ON	
REF:	
PLUG, ANG, TNC	
DRAWN KH	DATE 07/14/93
DESIGN JT	DATE 07/15/93
APPR.	DATE

KINGS
 ELECTRONICS CO., INC.
 ROCK HILL, SOUTH CAROLINA 29730
 M39012/30-0118

GSD