
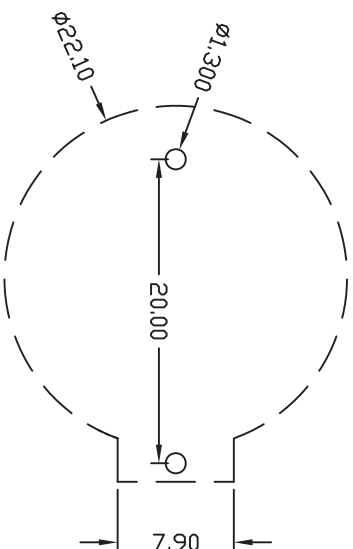
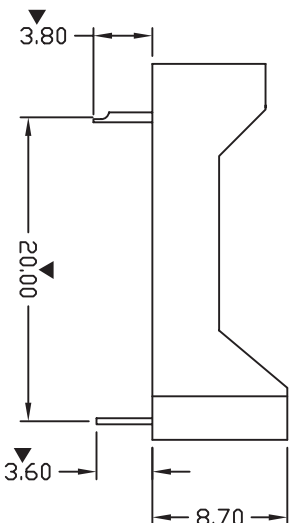
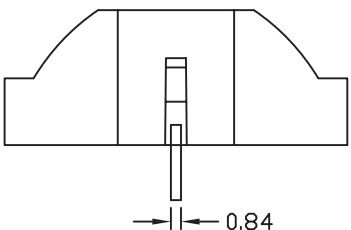



REV.	MATTER	APP.	DATE
A			

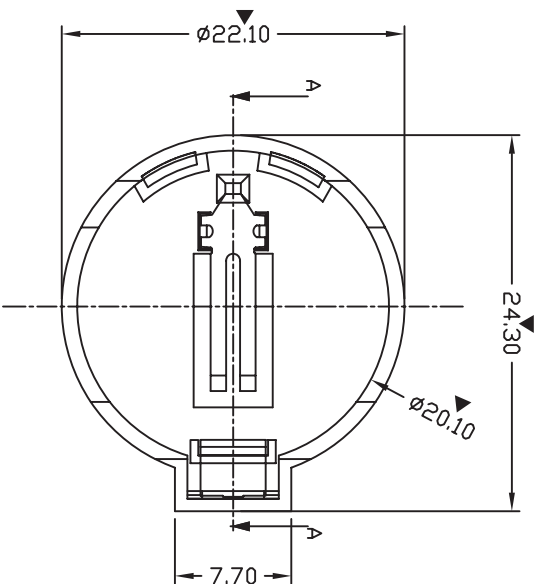

PCB HOLE LAYOUT

深圳市琦捷电子有限公司

TOLERANCE		DRAWN		UNIT:	TITLE:	
LINEAR	ANGLE	刘 军	APPROVED			
x. ±1 .x ±0.38 .xx ±0.25 .xxx ±0.10	x.' ±5' .x' ±2' .xx' ±1'	DATE 2007.07.06	SCALE: 1/1	MM	PART NO. BS-01-QJ-A1-001	REV. A
		SIZE: A4	DWG. NO. BS002-00		SHEET. 1 OF 1	

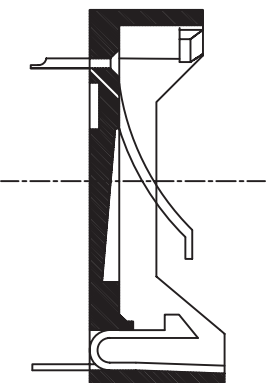

SECTION A-A

ORDERING INFORMATION

- NOTE:
- MATERIAL:
a. HOUSING: THERMOPLASTIC GLASS FIBRE UL94V-0
b. CONTACT: BRASS
(SURFACE PLATING: Sn100u")
SEE ORDERING INFORMATION
 - ELECTRIC:
a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
c. DIELECTRIC VOLTAGE: 750V AC ONE SEC LEVEL
d. OPERATING TEMPERATURE: -55 °C ~ +85 °C

BS-02-A*0*002

- PLATING:
J-Sn100u"~120u"
K-Sn150u"
- CRUST:
0-WITHOUT
- DIP 90° TYPE

- MATERIAL:
- 1A-PBT WHITE
 - 1B-PBT BLACK
 - 3A-PA6T WHITE
 - 3B-PA6T BLACK

注: ▼为重点管控尺寸