

1. Mechanical Dimensions:

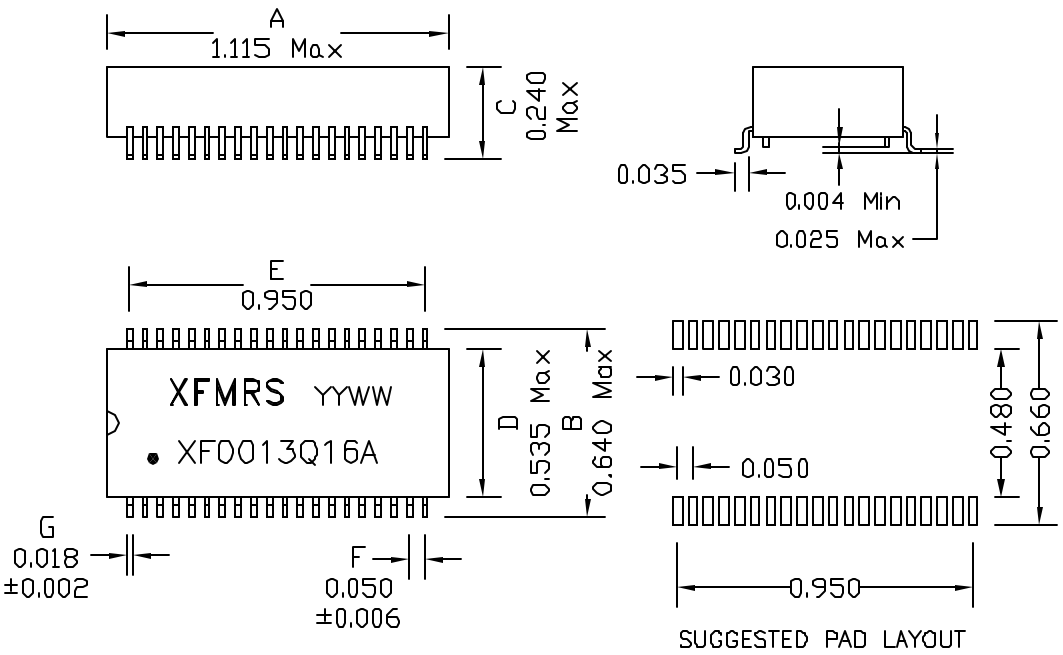

2. Schematic:

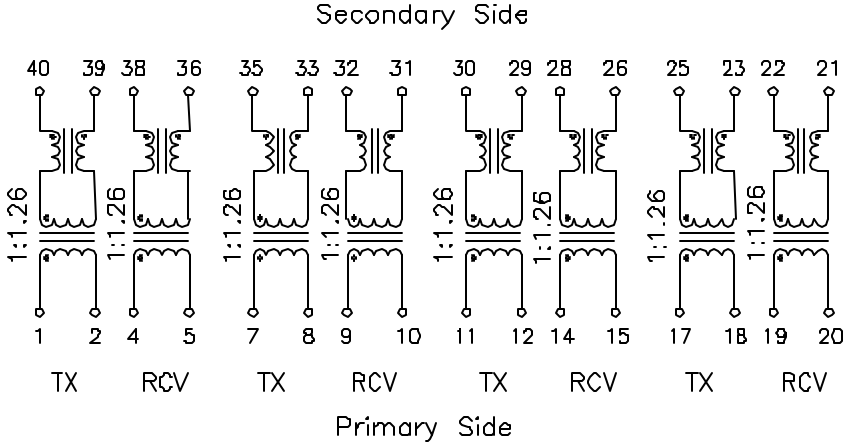

DOC. REV: A/2

3. Electrical Specifications: @25°C

Isolation: 1500 Vrms (PRI to SEC)

Turns Ratio: 1:1.26 (PRI:SEC)

PRI OCL: 1.20mH Min @100KHz 50mV

Cw/w: 35pF Maximum @100KHz 50mV (PRI/SEC)

PRI LL: 0.5uH Maximum @100KHz 50mV
(SEC Shorted)

Pri DCR: 0.8 Ohms Max

Sec DCR: 2.0 Ohms Max

CHOKE OCL: 30uH Typ @100KHz, 50mV

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component

XFMRS Inc www.XFMRS.com	Title: T1/E1/CEPT QUAD PORT		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in INCH	P/N: XF0013Q16A		REV. A
	DWN.	Xianyi	May-14-09
	CHK.	YK Liao	May-14-09
SHEET 1 OF 1	APP.	Joe Huff	May-14-09

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.