




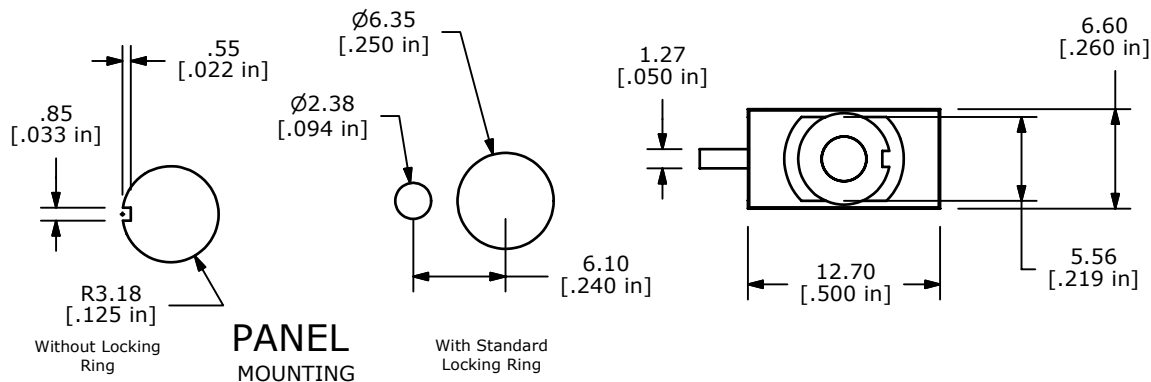


SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3	1-2


(ON) = MOMENTARY

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: SILVER
- RATING: 3A @ 120VAC OR 28VDC
1A @ 250VAC
- CONTACT RESISTANCE: 20 mOHMS
100 mA
- LIFE EXPECTANCY: 50,000 MAKE-AND-BREAK CYCLES
Min. AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,500 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 75°C
- 2002/95/EC (ROHS) COMPLIANT
- ▲ DENOTES CRITICAL PARAMETER.

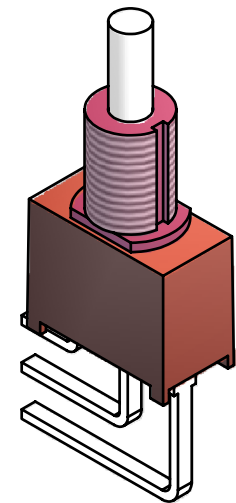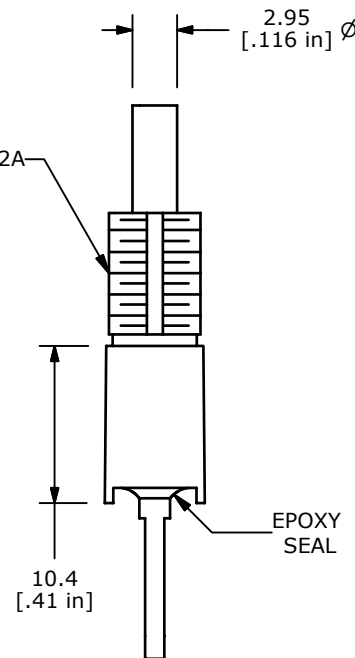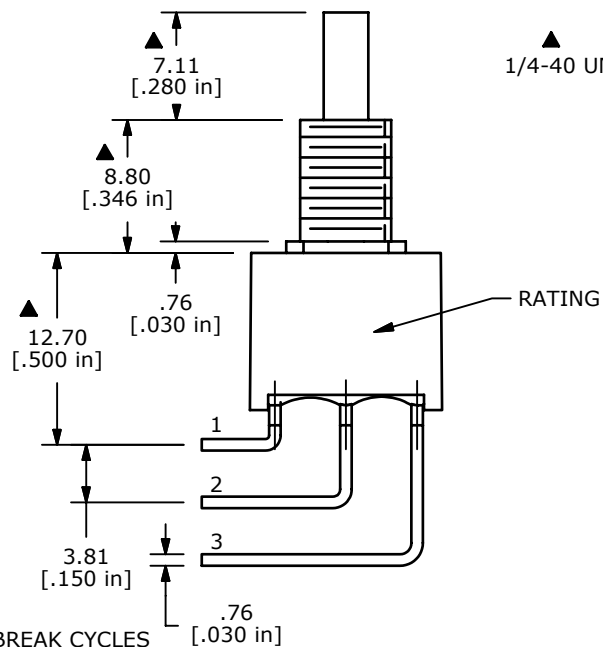

ISOMETRIC

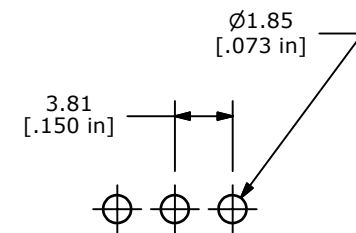

PCB LAYOUT



TITLE 700ASP7B10M7QE

A	18005	RELEASED FOR PRODUCTION	3/14/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
2:1	3/14/2008	BLR	T750104	A