





MBR10L100CT

10.0AMPS Low V_F Schottky Barrier Rectifiers

TO-220AB

Features

- ✧ UL Recognized File # E-326243
- ✧ Low power loss, high efficiency
- ✧ High current capability, low forward voltage drop
- ✧ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ✧ High surge current capability
- ✧ Qualified as per AEC-Q101
- ✧ Guard-ring for overvoltage protection
- ✧ For use in low voltage - high frequency inverter, free wheeling, and polarity protection application
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.375", (9.5mm) lead lengths at 5 lbs.,(2.3kg) tension

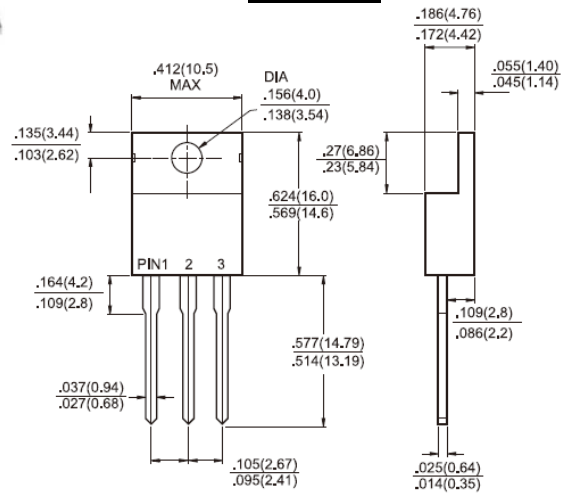

Mechanical Data

- ✧ Case: TO-220AB
- ✧ Terminals: Pure tin plated leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: As marked
- ✧ Weight: 1.88 grams
- ✧ Mounting torque: 5 in- lbs, max
- ✧ Mounting position: Any

Dimensions in inches and (millimeters)

Marking Diagram



- MBR10LXXCT = Specific Device Code
- G = Green Compound
- Y = Year
- WW = Work Week

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

Type Number	Symbol	MBR10L100CT		Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	100		V
Maximum RMS Voltage	V_{RMS}	70		V
Maximum DC Blocking Voltage	V_{DC}	100		V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	10		A
Peak Repetitive Forward Current (Rated V_R , Square Wave, 20KHz)	I_{FRM}	10		A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load	I_{FSM}	120		A
Peak Repetitive Reverse Surge Current (Note 1)	I_{RRM}	1		A
Maximum Instantaneous Forward Voltage (Note 2) $I_F=5A, T_A=25^\circ C$ $I_F=5A, T_A=125^\circ C$ $I_F=10A, T_A=25^\circ C$ $I_F=10A, T_A=125^\circ C$	V_F	TYP	MAX	V
		0.73	0.76	
		0.59	0.65	
		0.82	0.85	
		0.66	0.71	
Maximum DV Reverse Current @ Rated V_R $T_A=25^\circ C$ $T_A=125^\circ C$	I_R	TYP	MAX	uA mA
		0.30	20	
		0.50	15	
Voltage Rate of Change,(Rated V_R)	dV/dt	10000		V/us
Typical Junction Capacitance (Note 3)	C_j	185		pF
Typical Thermal Resistance (Note 4)	$R_{\theta JC}$	2.8		°C/W
Operating Temperature Range	T_J	- 55 to + 150		°C
Storage Temperature Range	T_{STG}	- 55 to + 150		°C

- Note 1: 2.0uS Pulse Width, f=1.0KHz
- Note 2: Pulse Test : 300uS Pulse Width, 1% Duty Cycle
- Note 3: Measure at 1 MHz and Applied Reverse Voltage of 4.0V D.C.
- Note 4: Heatsink Size (4" x 6" x 0.25") Al-Plate

RATINGS AND CHARACTERISTIC CURVES (MBR10L100CT)

FIG.1 FORWARD CURRENT DERATING CURVE

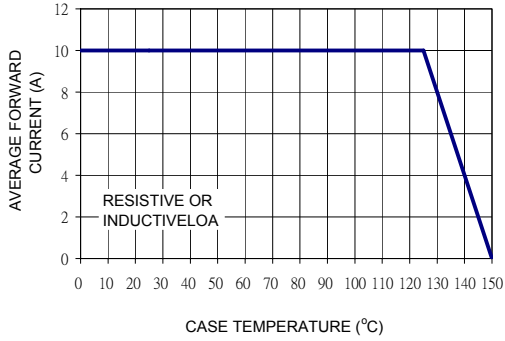


FIG. 2 MAXIMUM FORWARD SURGE CURRENT

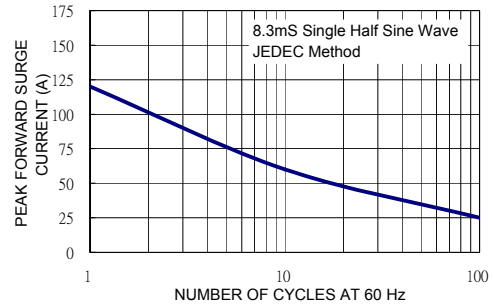


FIG. 3 TYPICAL FORWARD CHARACTERISTICS

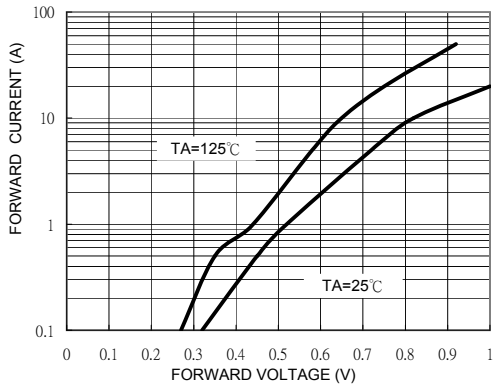


FIG. 4 TYPICAL REVERSE CHARACTERISTICS

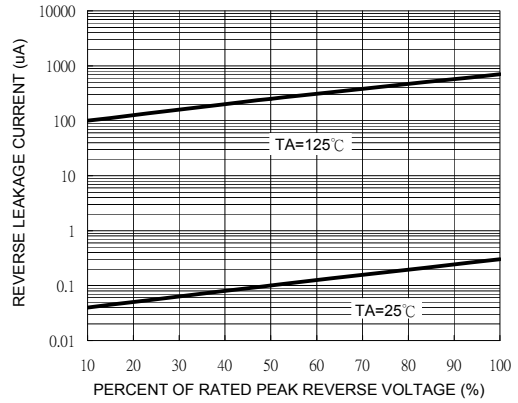


FIG. 5 TYPICAL JUNCTION CAPACITANCE

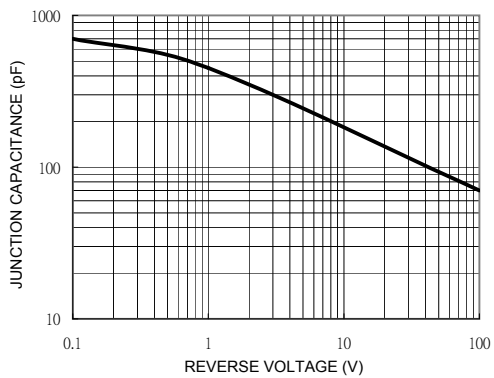


FIG. 6 TYPICAL TRANSIENT THERMAL IMPEDANCE PER LEG

