



## TDA2004

### LINEAR INTEGRATED CIRCUIT


## 10+10W STEREO AMPLIFIER FOR CAR RADIO

### DESCRIPTION

The UTC **TDA2004** is a class B dual audio power amplifier and is designed for car radio applications.

### FEATURES

- \* Low distortion.
- \* Low noise.

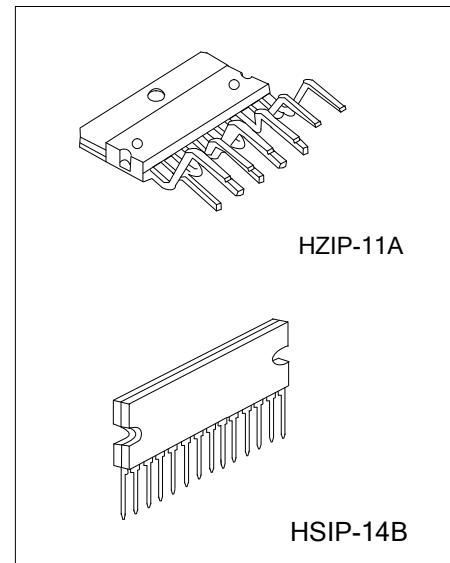

### ORDERING INFORMATION


| Ordering Number  |                  | Package  | Packing |
|------------------|------------------|----------|---------|
| Lead Free        | Halogen Free     |          |         |
| TDA2004L-J11-A-T | TDA2004G-J11-A-T | HZIP-11A | Tube    |
| TDA2004-H14-B-T  | TDA2004G-H14-B-T | HSIP-14B | Tube    |

|                                                                                        |                                                                                                   |
|----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| <p>TDA2004L-J11-A-T</p> <p>(1) Packing Type<br/>(2) Package Type<br/>(3) Lead Free</p> | <p>(1) T: Tube<br/>(2) J11-A: HZIP-11A, H14-B: HSIP-14B<br/>(3) L: Lead Free, G: Halogen Free</p> |
|----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|

### MARKIN

| HZIP-11A                                                                                       | HSIP-14B                                                                                         |
|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| <p>Lot Code ← 1 → Data Code</p> <p>UTC<br/>TDA2004</p> <p>L: Lead Free<br/>G: Halogen Free</p> | <p>Data Code<br/>UTC<br/>TDA2004</p> <p>L: Lead Free<br/>G: Halogen Free</p> <p>1 → Lot Code</p> |

## ■ PIN CONFIGURATION

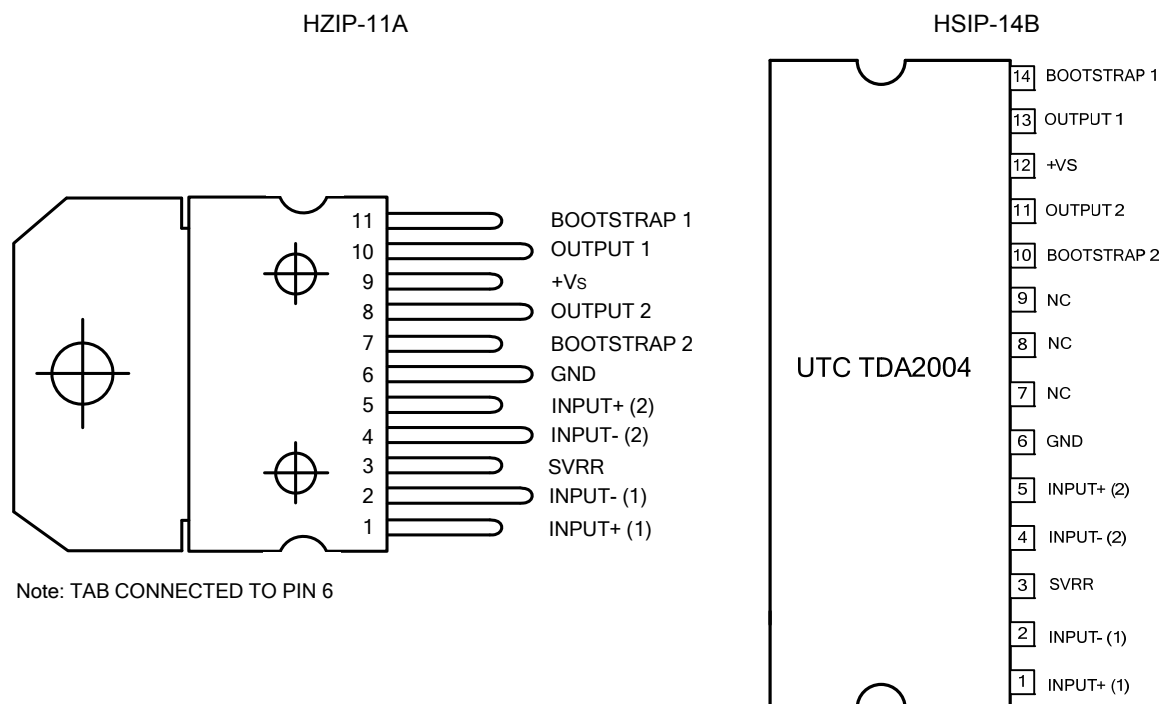

## ■ PIN DESCRIPTION

| PIN NO.  |                 | PIN NAME    |
|----------|-----------------|-------------|
| HZIP-11A | HSIP-14B (Note) |             |
| 1        | 1               | INPUT+ (1)  |
| 2        | 2               | INPUT- (1)  |
| 3        | 3               | SVRR        |
| 4        | 4               | INPUT- (2)  |
| 5        | 5               | INPUT+ (2)  |
| 6        | 6               | GND         |
| 7        | 10              | BOOTSTRAP 2 |
| 8        | 11              | OUTPUT 2    |
| 9        | 12              | +VS         |
| 10       | 13              | OUTPUT 1    |
| 11       | 14              | BOOTSTRAP 1 |

Note: PIN 7, 8, 9 no connection.

## ■ ABSOLUTE MAXIMUM RATINGS

| PARAMETER                                 |                        | SYMBOL           | RATINGS   | UNIT |
|-------------------------------------------|------------------------|------------------|-----------|------|
| Opearting Supply Voltage                  |                        | V <sub>SS</sub>  | 18        | V    |
| DC Supply Voltage                         |                        | V <sub>SS</sub>  | 28        | V    |
| Peak Supply Voltage (for 50ms)            |                        | V <sub>SS</sub>  | 40        | V    |
| Output Peak Current<br>(Note)             | non repetitive t=0.1ms | I <sub>O</sub>   | 4.5       | A    |
|                                           | repetitive f ≥10Hz     | I <sub>O</sub>   | 3.5       | A    |
| Power Dissipation at T <sub>C</sub> =60°C |                        | P <sub>D</sub>   | 30        | W    |
| Junction Temperature                      |                        | T <sub>J</sub>   | +125      | °C   |
| Storage Temperature                       |                        | T <sub>STG</sub> | -40 ~ 150 | °C   |

Note: The max. output current is internally limited.

## ■ THERMAL DATA

| PARAMETER                        | SYMBOL        | RATINGS | UNIT               |
|----------------------------------|---------------|---------|--------------------|
| Thermal Resistance Junction-Case | $\theta_{JC}$ | 3.0     | $^\circ\text{C/W}$ |

## ■ ELECTRICAL CHARACTERISTICS

(Refer to the test circuit,  $T_A=25^\circ\text{C}$ ,  $G_V=50\text{Db}$ ,  $R_{th}(\text{heatsink})=4^\circ\text{C/W}$ , unless otherwise specified.)

| PARAMETER                                          | SYMBOL              | TEST CONDITONS                                                              |                                 | MIN | TYP            | MAX | UNIT |
|----------------------------------------------------|---------------------|-----------------------------------------------------------------------------|---------------------------------|-----|----------------|-----|------|
| Supply Voltage                                     | V <sub>SS</sub>     |                                                                             |                                 | 8   |                | 18  | V    |
| Quiescent Output Voltage                           | V <sub>OUT</sub>    | V <sub>SS</sub> =14.4V                                                      |                                 | 6.6 | 7.2            | 7.8 | V    |
|                                                    |                     | V <sub>SS</sub> =13.2V                                                      |                                 | 6.0 | 6.6            | 7.2 | V    |
| Total Quiescent Drain Current                      | I <sub>D</sub>      | V <sub>SS</sub> =14.4V                                                      |                                 |     | 65             | 120 | mA   |
|                                                    |                     | V <sub>SS</sub> =13.2V                                                      |                                 |     | 62             | 120 |      |
| Stand-by Current                                   | I <sub>STAY-B</sub> | Pin 3 grounded                                                              |                                 |     | 5              |     | mA   |
| Output Power (each channel)<br>f=1KHz, THD=10%     | P <sub>OUT</sub>    | V <sub>SS</sub> =14.4V                                                      | R <sub>L</sub> =4Ω              | 6   | 6.5            |     | W    |
|                                                    |                     |                                                                             | R <sub>L</sub> =3.2Ω            | 7   | 8              |     | W    |
|                                                    |                     |                                                                             | R <sub>L</sub> =2Ω              | 9   | 10<br>(Note 1) |     | W    |
|                                                    |                     |                                                                             | R <sub>L</sub> =1.6Ω            | 10  | 11             |     | W    |
|                                                    |                     | V <sub>SS</sub> =13.2V                                                      | R <sub>L</sub> =3.2Ω            | 6   | 6.5            |     | W    |
|                                                    |                     |                                                                             | R <sub>L</sub> =1.6Ω            | 9   | 10             |     | W    |
|                                                    |                     | V <sub>SS</sub> =16V, R <sub>L</sub> =2Ω                                    |                                 |     | 12             |     | W    |
| Total Harmonic Distortion<br>(each channel) f=1KHz | THD                 | V <sub>SS</sub> =14.4V, R <sub>L</sub> =4Ω<br>P <sub>OUT</sub> =50mW ~ 4W   |                                 |     | 0.2            | 1   | %    |
|                                                    |                     | V <sub>SS</sub> =14.4V, R <sub>L</sub> =2Ω<br>P <sub>OUT</sub> =50mW ~ 6W   |                                 |     | 0.3            | 1   | %    |
|                                                    |                     | V <sub>SS</sub> =13.2V, R <sub>L</sub> =3.2Ω<br>P <sub>OUT</sub> =50mW ~ 3W |                                 |     | 0.2            | 1   | %    |
|                                                    |                     | V <sub>S</sub> =13.2V, R <sub>L</sub> =1.6Ω<br>P <sub>OUT</sub> =50mW ~ 6W  |                                 |     | 0.3            | 1   | %    |
|                                                    |                     |                                                                             |                                 |     |                |     |      |
| Cross Talk                                         | C <sub>T</sub>      | V <sub>SS</sub> =14.4V<br>V <sub>OUT</sub> =4Vrms,<br>R <sub>L</sub> =4Ω    | f=1KHz                          | 50  | 60             |     | dB   |
|                                                    |                     |                                                                             | f=10kHz,<br>R <sub>G</sub> =5KΩ | 40  | 45             |     | dB   |
| Input Saturation Voltage                           | V <sub>IN</sub>     |                                                                             |                                 | 300 |                |     | mV   |
| Input Resistance (non inverting input)             | R <sub>IN</sub>     | f=1kHz                                                                      |                                 | 70  | 200            |     | kΩ   |
| Low Frequency Roll Off (-3dB)                      | f <sub>L</sub>      | R <sub>L</sub> =4Ω                                                          |                                 |     |                | 35  | Hz   |
|                                                    |                     | R <sub>L</sub> =2Ω                                                          |                                 |     |                | 50  | Hz   |
|                                                    |                     | R <sub>L</sub> =3.2Ω                                                        |                                 |     |                | 40  | Hz   |
|                                                    |                     | R <sub>L</sub> =1.6Ω                                                        |                                 |     |                | 55  | Hz   |
| High Frequency Roll Off (-3dB)                     | f <sub>H</sub>      | R <sub>L</sub> =1.6Ω ~ 4Ω                                                   |                                 | 15  |                |     | kHz  |

Notes: 1. 9.3W without Bootstrap

2. Bandwith Filter: 22Hz ~ 22KHz.


## ■ ELECTRICAL CHARACTERISTICS (Cont.)

| PARAMETER                              | SYMBOL | TEST CONDITONS                                                                                                        | MIN                                    | TYP | MAX | UNIT               |
|----------------------------------------|--------|-----------------------------------------------------------------------------------------------------------------------|----------------------------------------|-----|-----|--------------------|
| Voltage Gain (open loop)               | $G_V$  | $f=1\text{kHz}$                                                                                                       |                                        | 90  |     | dB                 |
| Voltage Gain (closed loop)             |        | $f=1\text{KHz}$                                                                                                       | 48                                     | 50  | 51  | dB                 |
| Closed Loop Gain Matching              |        |                                                                                                                       |                                        | 0.5 |     | dB                 |
| Total Input Noise Voltage              | $e_N$  | $R_G=10\text{K}\Omega$ (Note 2)                                                                                       |                                        | 1.5 | 5   | $\mu\text{V}$      |
| Supply Voltage Rejection               | SVR    | $f_{\text{RIPPLE}}=100\text{Hz}$ , $R_G=10\text{k}\Omega$<br>$C_3=10\mu\text{F}$ , $V_{\text{RIPPLE}}=0.5\text{Vrms}$ | 35                                     | 45  |     | dB                 |
| Efficiency                             | $\eta$ | $V_{\text{SS}}=14.4\text{V}$ , $f=1\text{kHz}$                                                                        | $R_L=4\Omega$ , $P_O=6.5\text{W}$      | 70  |     | %                  |
|                                        |        |                                                                                                                       | $R_L=2\Omega$ , $P_O=10\text{W}$       | 60  |     | %                  |
|                                        |        | $V_{\text{SS}}=13.2\text{V}$ , $f=1\text{kHz}$                                                                        | $R_L=3.2\Omega$ ,<br>$P_O=6.5\text{W}$ | 70  |     | %                  |
|                                        |        |                                                                                                                       | $R_L=1.6\Omega$ ,<br>$P_O=10\text{W}$  | 60  |     | %                  |
| Thermal Shut-down Junction Temperature | $T_J$  |                                                                                                                       |                                        | 145 |     | $^{\circ}\text{C}$ |

Notes: 1. 9.3W without Bootstrap

2. Bandwith Filter: 22Hz ~ 22KHz.

## ■ TEST AND APPLICATION CIRCUIT

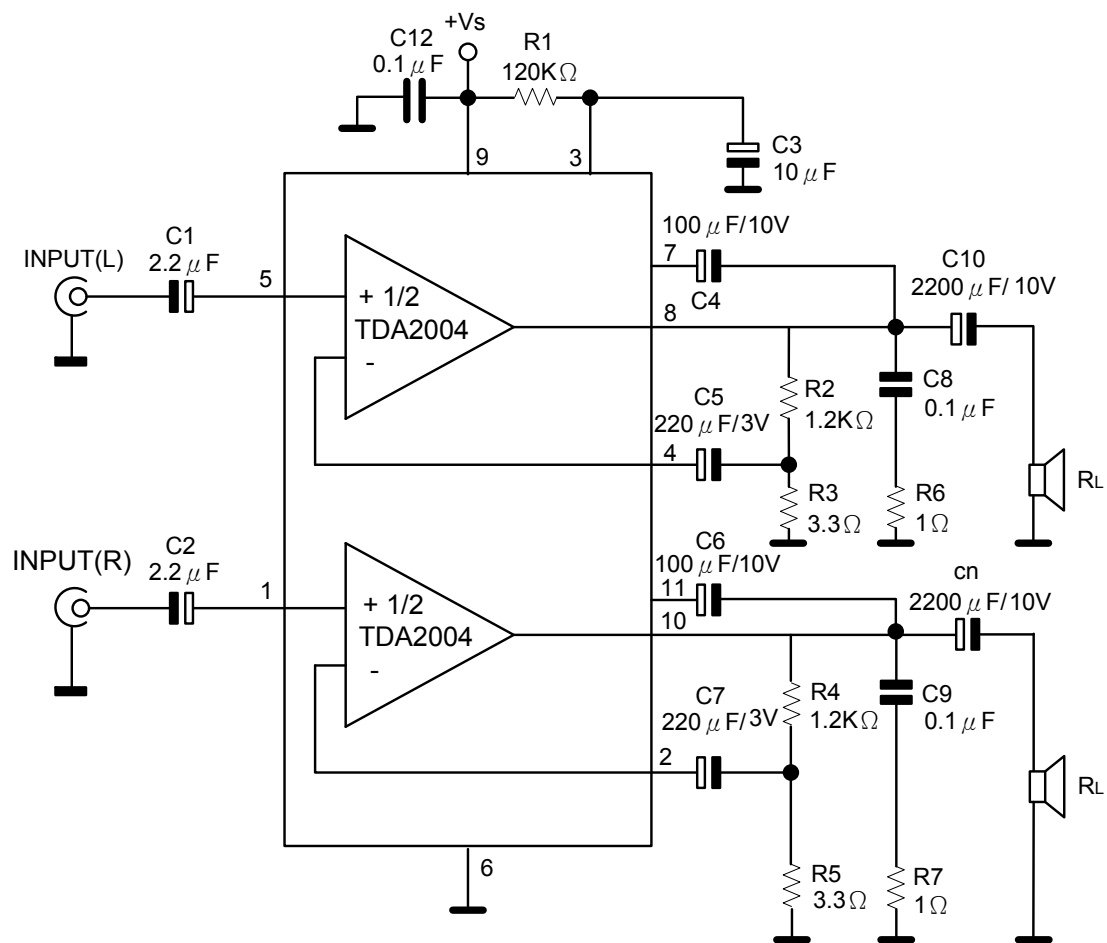

# ■ TYPICAL CHARACTERISTICS

Figure 1. Quiescent Output Voltage vs. Supply Voltage

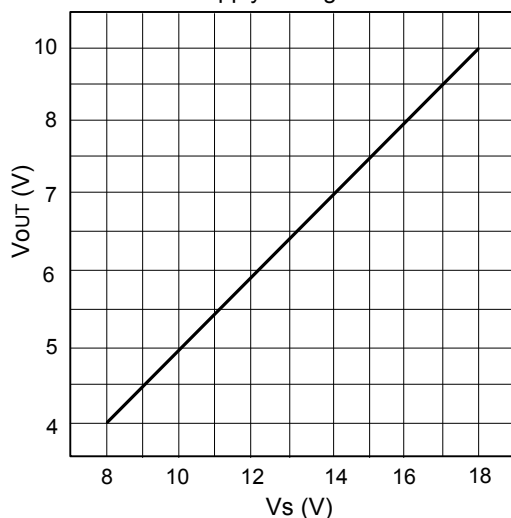


Figure 2. Quiescent Drain Current vs. Supply Voltage

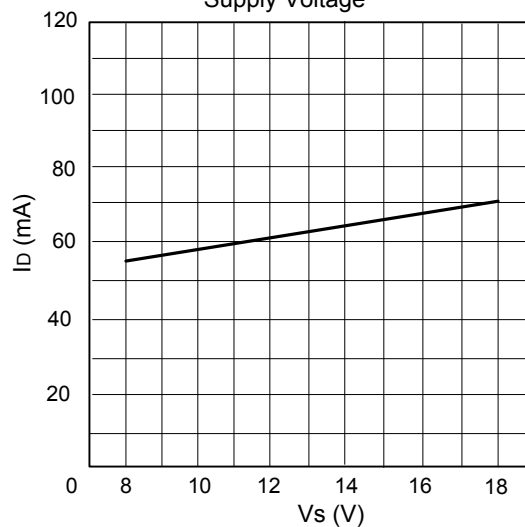


Figure 3. Distortion vs. Output Power

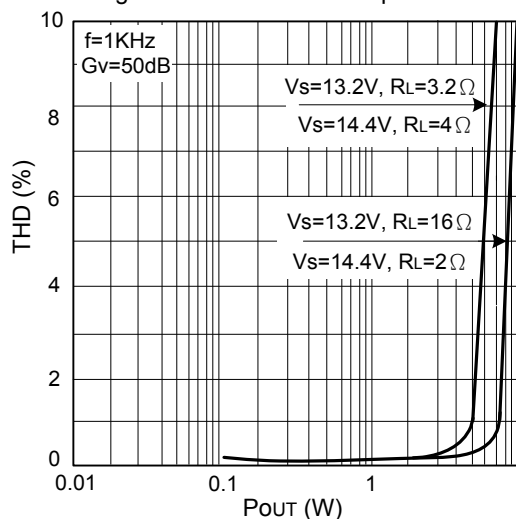


Figure 4. Output Power vs. Supply Voltage

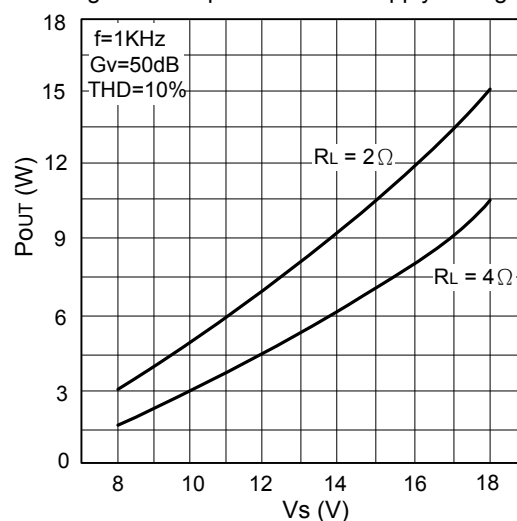


Figure 5. Output Power vs. Supply Voltage








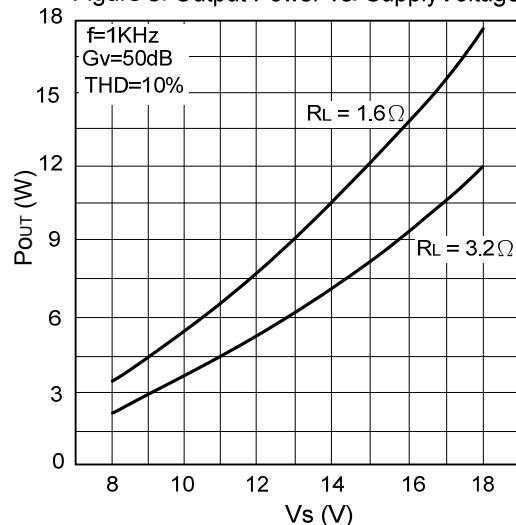


Figure 6. Distortion vs Frequency

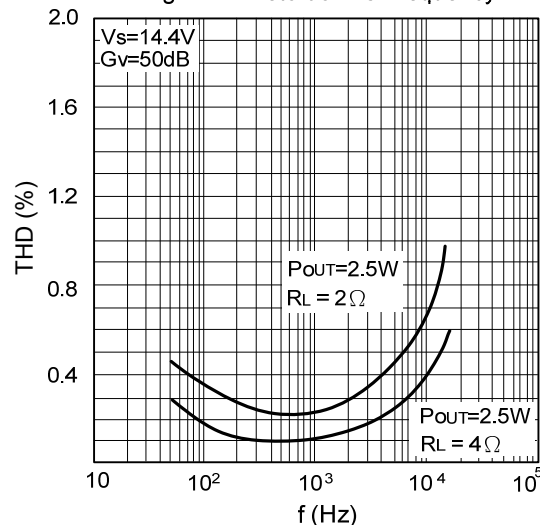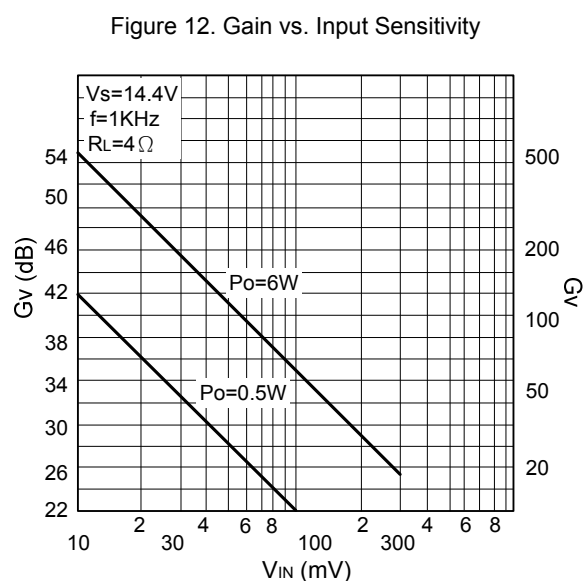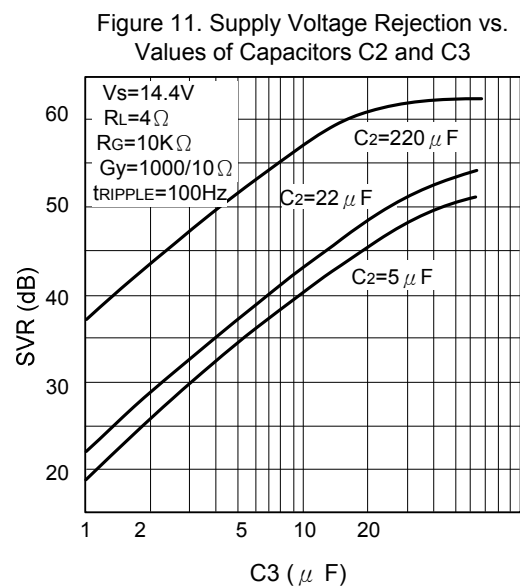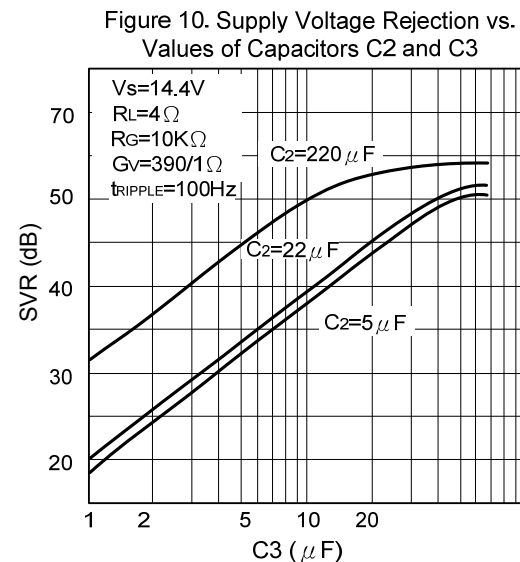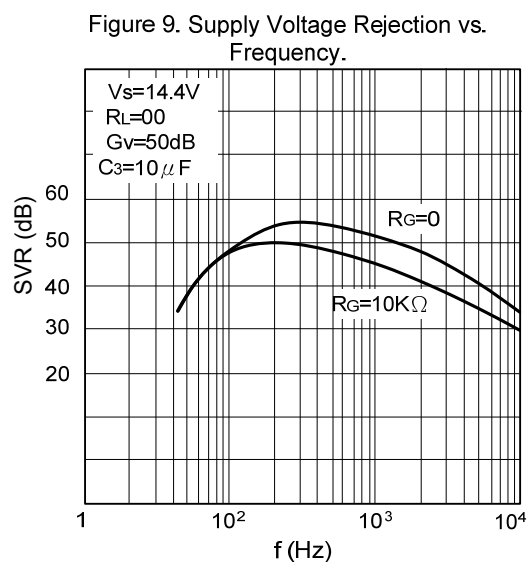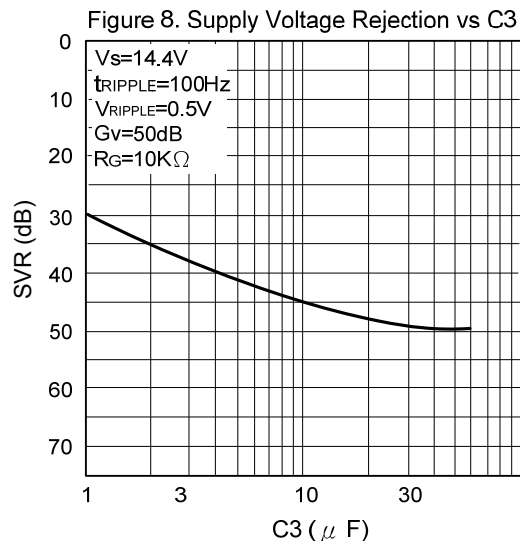

## ■ TYPICAL CHARACTERISTICS (cont.)

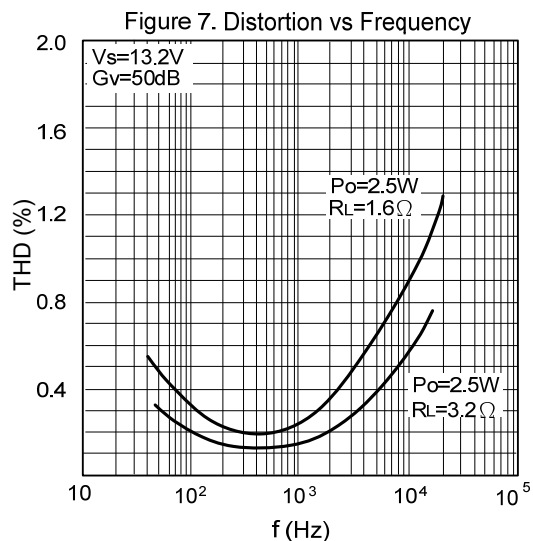

■ TYPICAL CHARACTERISTICS (cont.)

Figure 13. Maximum Allowable Power Dissipation vs. Ambient Temperature

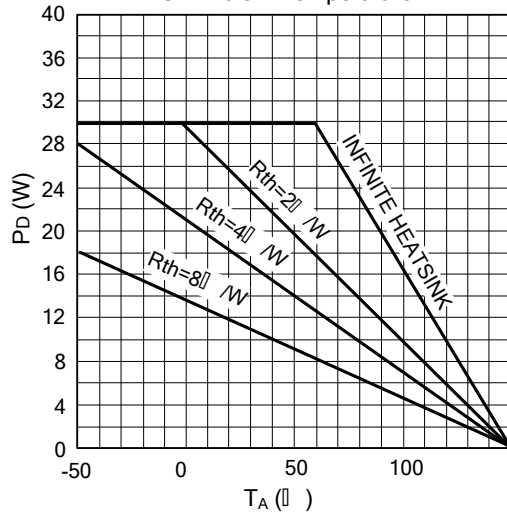


Figure 14. Total Power Dissipation and Efficiency vs. Output Power


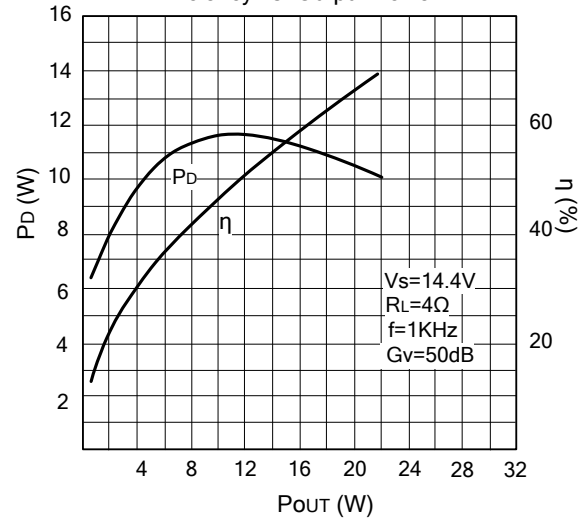


Figure 15. Total Power Dissipation and Efficiency vs. Output Power

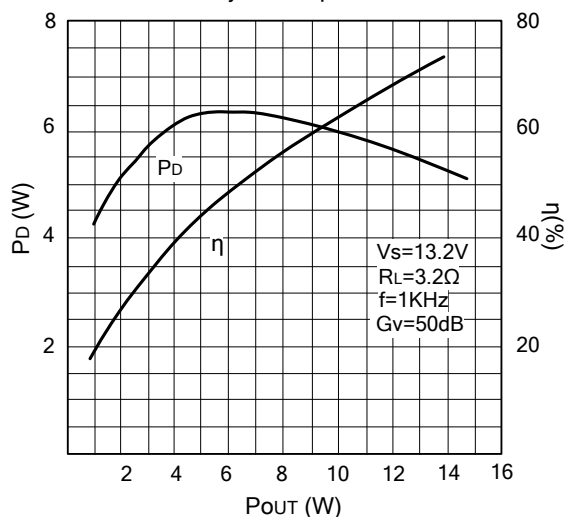

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.