


**DESCRIPTION: 10W 1.5KVDC Wide Voltage Input DC/DC Converters**

The rated output power of TP10DB converters is 10W, the outline dimensions is "25.4\*25.4\*11.2", 2:1, 4:1 wide input voltage range, the voltage range is 9-18V, 18-36V, 36-72V, 9V-36V, 18V-72V. The accuracy of the converter can reach  $\pm 1\%$ , it can be widely used in telecommunications, railway transportation, instrument and etc.

**FEATURES**

|                                   |                                                    |                                               |
|-----------------------------------|----------------------------------------------------|-----------------------------------------------|
| 10W output power                  | Long-term short-circuit protection, Auto recovery  | High switching frequency, High output density |
| Metal shell package (full shield) | With remote control and output adjustment function | RoHS compliant                                |

**SELECTION GUIDE**

| Part Number  | Input Voltage |              | Output        |             | Efficiency (Typ) % | Maximum capacitive load (u F) |
|--------------|---------------|--------------|---------------|-------------|--------------------|-------------------------------|
|              | Voltage (VDC) |              | Voltage (VDC) | Current (A) |                    |                               |
|              | Rated         | Range values |               |             |                    |                               |
| TP10DB12S05  | 12(2:1)       | 9-18         | 5             | 2.00        | 84                 | 2200                          |
| TP10DB12S12  | 12(2:1)       | 9-18         | 12            | 0.83        | 86                 | 470                           |
| TP10DB12S15  | 12(2:1)       | 9-18         | 15            | 0.67        | 86                 | 470                           |
| TP10DB24S05  | 24(2:1)       | 18-36        | 5             | 2.00        | 84                 | 2200                          |
| TP10DB24S12  | 24(2:1)       | 18-36        | 12            | 0.83        | 87                 | 470                           |
| TP10DB24S15  | 24(2:1)       | 18-36        | 15            | 0.67        | 87                 | 470                           |
| TP10DB48S05  | 48(2:1)       | 36-72        | 5             | 2.00        | 84                 | 2200                          |
| TP10DB48S12  | 48(2:1)       | 36-72        | 12            | 0.83        | 87                 | 470                           |
| TP10DB48S15  | 48(2:1)       | 36-72        | 15            | 0.67        | 87                 | 470                           |
| TP10DB24S05W | 24(4:1)       | 9-36         | 5             | 2.00        | 84                 | 2200                          |
| TP10DB24S12W | 24(4:1)       | 9-36         | 12            | 0.83        | 87                 | 470                           |
| TP10DB24S15W | 24(4:1)       | 9-36         | 15            | 0.67        | 87                 | 470                           |
| TP10DB24S24W | 24(4:1)       | 9-36         | 24            | 0.42        | 86                 | 470                           |
| TP10DB48S05W | 48(4:1)       | 18-72        | 5             | 2.00        | 84                 | 2200                          |
| TP10DB48S15W | 48(4:1)       | 18-72        | 15            | 0.67        | 83                 | 470                           |

All specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

**INPUT CHARACTERISTICS**

| Parameter      | Conditions                                         | Min                                                                                                     | Typ | Max | Units |
|----------------|----------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----|-----|-------|
| Input Voltage  |                                                    | 9                                                                                                       | 12  | 18  | VDC   |
| Input Voltage  |                                                    | 18                                                                                                      | 24  | 36  | VDC   |
| Input Voltage  |                                                    | 36                                                                                                      | 48  | 72  | VDC   |
| Input Voltage  |                                                    | 9                                                                                                       | 24  | 36  | VDC   |
| Input Voltage  |                                                    | 18                                                                                                      | 48  | 72  | VDC   |
| Remote Control | CNT side plus level, the reference voltage is -Vin | High frequency electric or floating, low level or ground power supply work, output power was turned off |     |     |       |

**OUTPUT CHARACTERISTICS**

| Parameter                     | Conditions      | Min | Typ                       | Max       | Units |
|-------------------------------|-----------------|-----|---------------------------|-----------|-------|
| Voltage accuracy              |                 |     |                           | $\pm 1$   | %     |
| Adjustment rate               |                 |     |                           | $\pm 0.2$ | %     |
| Load effect                   |                 |     |                           | $\pm 0.5$ | %     |
| Dynamic Response              | 50~75% Load     |     | $\pm 4\%V_o$ Overshoot    |           | %     |
| Dynamic Response              | 50~25% Load     |     | 400 $\mu$ S Recovery Time |           | %     |
| Temperature drift coefficient |                 |     | $\pm 0.02$                |           | %/°C  |
| Ripple & Noise                | 20MHz Bandwidth |     |                           | 100       | mVp-p |

## GENERAL CHARACTERISTICS

| Parameter                | Conditions           | Min | Typ                 | Max  | Units |
|--------------------------|----------------------|-----|---------------------|------|-------|
| Isolation voltage        | Input-Output         |     | 1500                |      | VDC   |
| Isolation voltage        | Input - shell        |     | 1500                |      | VDC   |
| Isolation voltage        | Output input - shell |     | 500                 |      | VDC   |
| Insulation resistance    | 500VDC               |     | 100                 |      | MΩ    |
| Switching frequency      |                      |     | 300                 |      | KHZ   |
| Environment temperature  |                      | -40 |                     | +95  | ℃     |
| Working case temperature |                      | -40 |                     | +95  | ℃     |
| Storage temperature      |                      | -40 |                     | +105 | ℃     |
| Relative humidity        |                      | 10  |                     | 90   | %     |
| MTBF                     | Mil HDBK 217F Tc=25℃ |     | 2 × 10 <sup>6</sup> |      |       |

## PROTECTION CHARACTERISTICS


| Parameter                        | Conditions    |
|----------------------------------|---------------|
| Output Over-current protection   | Auto recovery |
| Output Short -circuit protection | Auto recovery |

## NOTES

- 1、 The maximum temperature can not exceed the specified value While product work.
- 2、 The highest working environment temperature of product is variable, the cooling conditions and the actual use of power changes will affect the product's maximum working temperature.
- 3、 This series of high power density products, more heat dissipation, cooling area is limited; In high temperature environment & full-Load, it is recommended to use auxiliary cooling measures (plus radiator, paste the metal box wall, etc.) to ensure that The temperature of the product substrate does not exceed the specified value.

## MECHANICAL DIMENSIONS

DIP Package

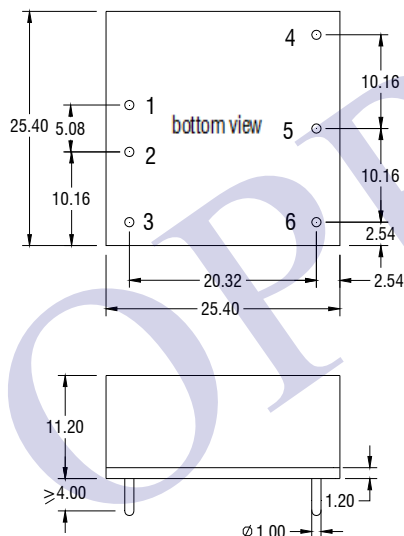

Units: mm Tolerance:±0.2mm

## PIN CONNECTION

| PIN | Single output |
|-----|---------------|
| 1   | +Vin          |
| 2   | -Vin          |
| 3   | CNT           |
| 4   | +V0           |
| 5   | NP            |
| 6   | GND           |

## MODEL SELECTION

