New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (201) 376-292
(212) 227-600
FAX: (201) 376-896

PARAMETERS


1N3325B
REF/REG DIODE, 10W < P(D)

Description: Ref/Reg Diode, 10W < P(D)

Manufacturer	
Mil/High-Rel? (Y/N)	
Nom. Ref. Volt	33
Test Current	380m
Tol. (%)	5
PD Max. (W)	50
Dyn. Zmax (*j*)	3.2
Temp Coef pp/10k	
Oper. Temp (*x*C) Max	175*u*
Pkg Style	
Surface Mounted (Y/N)	N

u Junction Temperature *2* It(rms)

DO-5

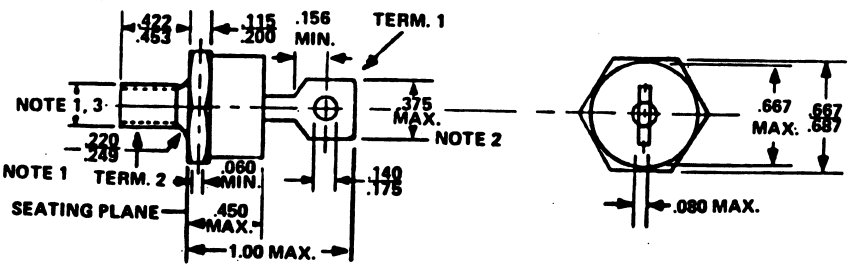

NOTES:

1. COMPLETE THREADS TO EXTEND TO WITHIN 2-1/2 THREADS OF SEATING PLANE.
2. ANGULAR ORIENTATION OF THIS TERMINAL IS UNDEFINED.
3. 1/4-28 UNF-2A. MAXIMUM PITCH DIAMETER OF PLATED THREADS SHALL BE BASIC PITCH DIAMETER (.2268", 5.74 MM) REF. (SCREW THREAD STANDARDS FOR FEDERAI SERVICES 1957) HANDBOOK H28 1957 P1.
4. MINIMUM FLAT.