

Absolute encoders - SSI

EX approval ATEX EEx d IIC T6

Single- and multiturn encoder 14 bit ST / 12 bit MT

X 700 - SSI



X 700 with clamping flange

Features

- Encoder single- or multiturn / SSI / ATEX
- Optical sensing
- Resolution: singleturn 14 bit, multiturn 12 bit
- Clamping flange / shaft \varnothing 10 mm
- Explosion protection per EEx d IIC T6
- Area of application: EX I/II 2 GD / ATEX 133213X
- Device class 2 / zone 1 (gas), zone 21 (dust)
- Electronic setting of zero point
- Counting direction input

Technical data - electrical ratings

Voltage supply	10...30 VDC
Reverse polarity protection	Yes
Consumption w/o load	\leq 50 mA (24 VDC)
Initializing time (typ.)	20 ms after power on
Interface	SSI
Steps per turn	16384 / 14 bit
Number of turns	4096 / 12 bit
Absolute accuracy	\pm 0.025°
Sensing method	Optical
Code	Gray or binary
Code sequence	CW/CCW coded by connection
Inputs	SSI clock Control signals UP/ $\overline{\text{DOWN}}$ and zero
Output circuit	SSI data linedriver RS485 Diagnostic outputs push-pull
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-4
Diagnostic functions	Self-diagnosis Code continuity check Multiturn sensing
Approval	UL approval / E301461

Technical data - mechanical design

Housing	\varnothing 70 mm
Shaft	\varnothing 10 mm (clamping flange)
Flange	Clamping flange
Protection DIN EN 60529	IP 67
Operating speed	\leq 6000 rpm (mechanical) \leq 6000 rpm (electric)
Starting torque	\leq 0.4 Nm
Admitted shaft load	\leq 60 N axial \leq 50 N radial
Materials	Housing: stainless steel Flange: stainless steel
Operating temperature	-25...+60 °C
Relative humidity	95 % non-condensing
Resistance	DIN EN 60068-2-6 Vibration 10 g, 16-2000 Hz DIN EN 60068-2-27 Shock 200 g, 6 ms
Weight approx.	1300 g
E-connection	Cable 2 m (other length upon request)

Absolute encoders - SSI

EX approval ATEX EEx d IIC T6

Single- and multiturn encoder 14 bit ST / 12 bit MT

X 700 - SSI

Part number

Singleturn

X 700. **A** **1** **12** **02**

E-connection
12 Cable 2 m, axial

Voltage supply / signals
0 10...30 VDC / gray code 13 bit
2 10...30 VDC / binary code 13 bit

Flange / Shaft
1 Clamping flange / ø10 mm IP 67

Design
A Singleturn

Multiturn

X 700. **M** **1** **12** **02**


E-connection
12 Cable 2 m, axial

Voltage supply / signals
1 10...30 VDC / gray code 25 bit
2 10...30 VDC / binary code 25 bit
4 10...30 VDC / gray code 24 bit

Flange / Shaft
1 Clamping flange / ø10 mm IP 67

Design
M Multiturn

Data transfer

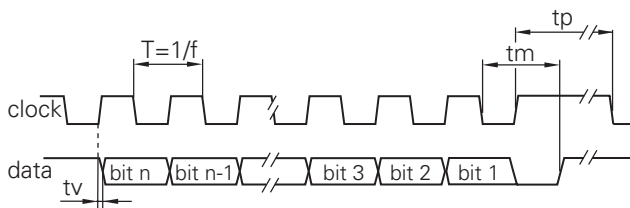

Clock frequency f	62.5...1500 kHz
Scan ratio of T	40...60 %
Time lag t_v	150 ns
Monoflop time t_m	$25 \mu s + T/2$
Clock interval t_p	30 μs

Absolute encoders - SSI

EX approval ATEX EEx d IIC T6

Single- and multiturn encoder 14 bit ST / 12 bit MT

X 700 - SSI

Terminal significance	
UB	Encoder voltage supply.
GND	Encoder ground connection relating to UB.
Data+	Positive, serial data output of differential linedriver.
Data-	Negative, serial data output of differential linedriver.
Clock+	Positive SS clock input. Clock+ together with clock- forms a current loop. A current of approx. 7 mA towards clock+ input means logic 1 in positive logic.
Clock-	Negative SSI clock input. Clock- together with clock+ forms a current loop. A current of approx. 7 mA towards clock- input means logic 0 in positive logic.
Zero setting	Input for setting a zero point anywhere within the programmed encoder resolution. The zero setting operation is triggered by a High impulse and has to be in line with the selected direction of rotation (UP/DOWN). Connect to GND after setting operation for maximum interference immunity. Impulse duration >100 ms.
$\overline{\text{DATAVALID}}$	Diagnostic output. An error warning is given at level Low. Important: Interferences must be drained by the downstream electronics.
$\overline{\text{DATAVALID MT}}$	Diagnostic output for monitoring the multiturn sensor voltage supply. Upon dropping below a defined voltage level the $\overline{\text{DV MT}}$ output is switched to Low.
$\overline{\text{UP/DOWN}}$	$\overline{\text{UP/DOWN}}$ counting direction input. This input is standard on High. $\overline{\text{UP/DOWN}}$ means ascending output data with clockwise shaft rotation when looking at flange. $\overline{\text{UP/DOWN}}$ -Low means ascending values with counterclockwise shaft rotation when looking at flange.

Terminal assignment	
Core colour	Assignment
brown	UB
white	GND
green	Clock+
grey	Data+
blue	Zero setting
pink	Data-
yellow	Clock-
black	$\overline{\text{DATAVALID}}$
red	$\overline{\text{UP/DOWN}}$
violet	$\overline{\text{DATAVALID MT}}$

Trigger level	
SSI	Circuit
SSI-Clock	Optocoupler
SSI-Data	Linedriver RS485

Control inputs	Input circuit
Input level High	>0.7 UB
Input level Low	<0.3 UB
Input resistance	10 kΩ

Output	Linedriver RS422
Output level High	>2.5 V (I = -20 mA)
Output level Low	<0.5 V (I = 20 mA)
Load High	<20 mA
Load Low	<20 mA

Absolute encoders - SSI

EX approval ATEX EEx d IIC T6

Single- and multiturn encoder 14 bit ST / 12 bit MT

X 700 - SSI

Dimensions

