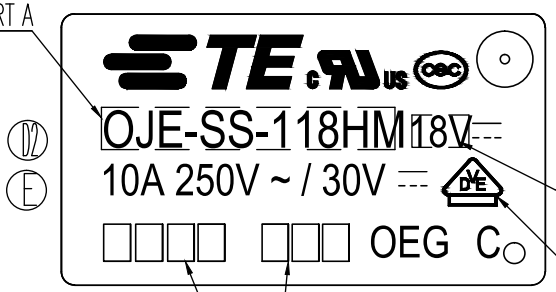
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - -, -
© COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST
HB	-


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REMOVED THE RIB ON THE BASE TO CASE ECO-15-011310	3Nov2015	HYS	CHL

PART A



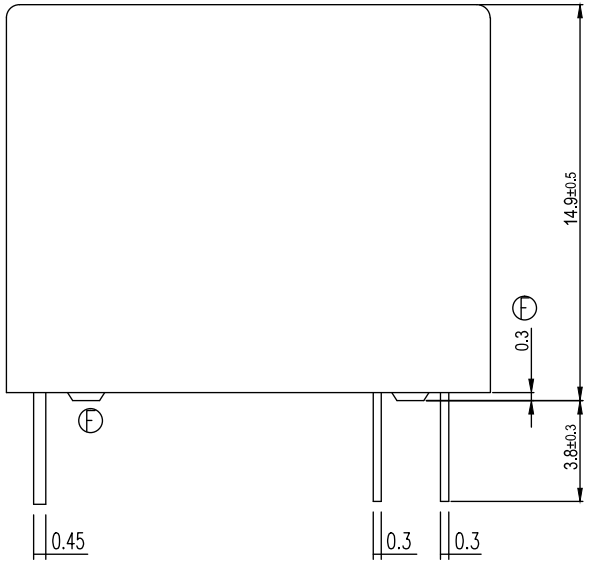

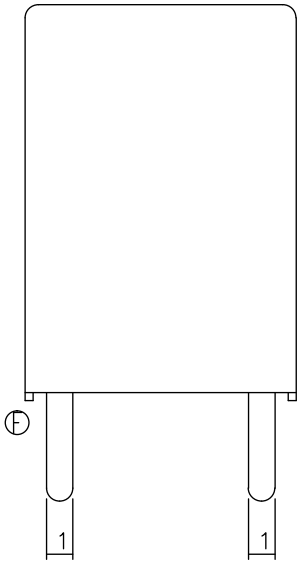


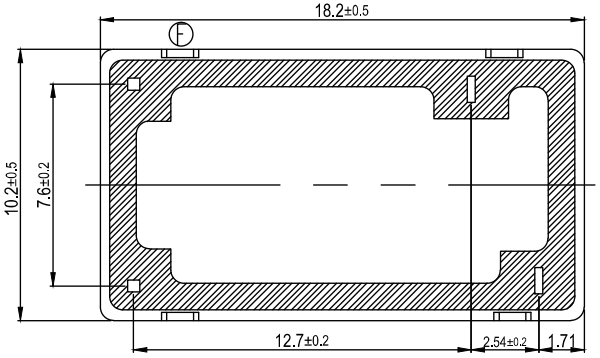


Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 – 2.99mm	±0.2mm
3mm min.	±0.3mm

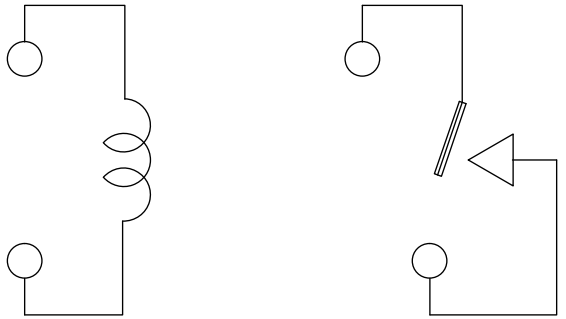

CONNECTION FIGURE

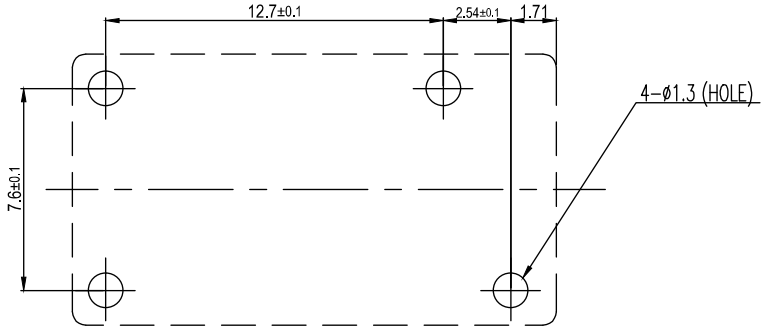


FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING
(BOTTOM VIEW)

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -

FINISH -

DWN	H.SASAKI
CHK	Y.OIKAWA
APVD	A.NAGAI
PRODUCT SPEC	SEE SPEC TABLE
APPLICATION SPEC	-
WEIGHT	-

TE Connectivity

NAME - OJ-SS-HM CUSTOMER DRAWING -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1461077	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 2 | REV F

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - -, -
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
HB	-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

TE PART NO	TE TYPE NAME	PACKAGE SPEC	PART B	PART A	TYPE	
1461077-6	OJ-SS-148HM	107-79010	48V	OJ-SS-148HM	h	
1440007-2	OJ-SS-124HM	107-79010	24V	OJ-SS-124HM	g	
1461077-5	OJ-SS-118HM	107-79010	18V	OJ-SS-118HM	f	⑦①
1419135-3	OJ-SS-112HM	107-79010	12V	OJ-SS-112HM	e	
1461077-4	OJ-SS-109HM	107-79010	9V	OJ-SS-109HM	d	⑦②
1461077-3	OJ-SS-106HM	107-79010	6V	OJ-SS-106HM	c	⑦②
1461077-2	OJ-SS-105HM	107-79010	5V	OJ-SS-105HM	b	
1461077-1	OJ-SS-103HM	107-79010	3V	OJ-SS-103HM	a	⑦②

RELAY TYPE

NOTE:

ⒹⒸ 1.LOT NO. SYSTEM AS FOLLOWING:

□□□□

WEEK

YEAR

⑦② 2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

⑦② 3.FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKENSS AND DIAMETER.
+0.5mm FOR LENGTH.

Ⓕ⑦② 4.MARKING FROM INK TO LASER AND USING WELDED CONTACT

⑦② 5.ADD LOT NO. SYSTEM AS FOLLOWING;

[1] [1] [A]
I II III

I, DIGITS FOR DAY OF THE WEEK
1...MONDAY IN THIS WEEK;
2...TUESDAY IN THIS WEEK;
.....
7...SUNDAY IN THIS WEEK

II, DIGITS FOR SHIFT OF THE DAY
1...DAY SHIFT IN THIS DAY;
2...NIGHT SHIFT IN THIS DAY;

III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY,
SUCH AS: A,B.....Z

ITEM	DESCRIPTION	MATERIAL	TREATMENT	INCOMBUSTIBILITY
15	SEAL (BASE & BOBBIN)	EPOXY RESIN		
14	MAGNETIC WIRE	3UEW		
13	CASE	P.B.T		94V-0
12	BASE	P.B.T		94V-0
11	BOBBIN	P.B.T		94V-0
10	COIL TERMINAL	C.P WIRE	SOLDER DIP	
9	CARD	P.P.S		94V-0
8	MOVABLE CONTACT	Ag ALLOY		
7	NO.CONTACT	Ag		
6	HINGE SPRING	STEEL		
5	NO.TERMINAL	PBP	SOLDER DIP	
4	MOVABLE SPRING	Cu ALLOY	SOLDER DIP	
3	CORE	STEEL	NIP	
2	ARMATURE	STEEL	NIP	
1	YOKE	STEEL	NIP	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -

FINISH -

DWN H.SASAKI
CHK Y.OIKAWA -
APVD A.NAGAI -
PRODUCT SPEC SEE SPEC TABLE
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME
-
OJ-SS-HM CUSTOMER DRAWING
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1461077	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 2 OF 2 | REV F