


SAW Bandpass Filter 260751B



1. Features

- IF Bandpass Filter
- Low-Loss Filter
- Single-Ended Operation
- Ceramic Surface Mount Device (SMD) Package
- Maximum Storage Temperature Range : -40 °C ~ 85 °C
- Electrostatics Sensitive Device (ESD)

2. Package Dimensions

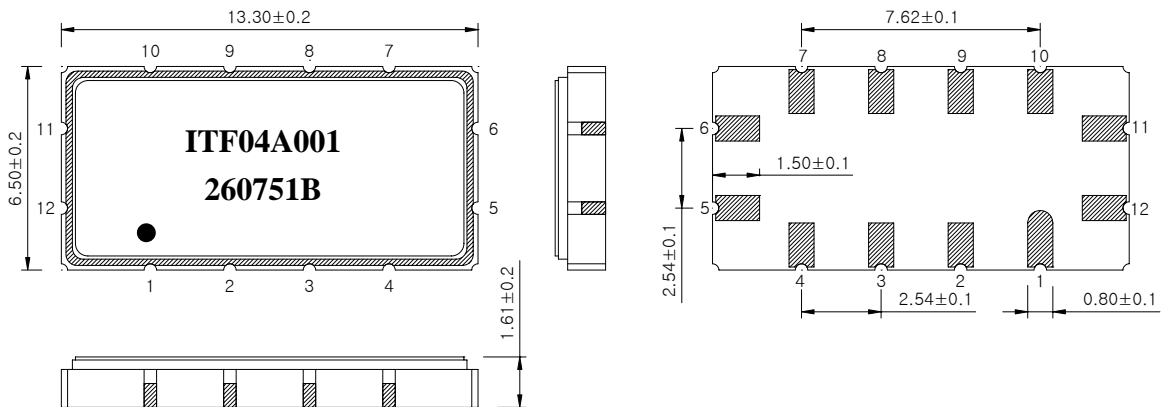

Package : S1365

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um Ni Plating

Pad Configuration	
11	Input
5	Output
6, 12	Ground
Other	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	260751B	
		Rev. Date	2006-10-12	
		Rev.	NJ4001-CS03	1/6

SAW Bandpass Filter 260751B



3. Specifications


F_o = 208.25 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating temperature range : -10°C ~ +60°C		Minimum	Typical	Maximum
Center Frequency	MHz	-	208.25	-
Insertion Loss	dB	-	13.1	15.0
1dB Bandwidth	MHz	6.6	7.0	-
3dB Bandwidth	MHz	7.65	7.7	-
40dB Bandwidth	MHz	-	11.1	12.0
Amplitude Ripple (F _o +/- 2.9 MHz)	dB	-	0.6	1.0
Group Delay Variation (F _o +/- 2.9 MHz)	nsec	-	40	100
Absolute Delay	usec	-	1.01	-
Relative Attenuation				
199 ~ 203 MHz	dB	35	45	-
215 ~ 315 MHz	dB	40	45	-
Temperature Coefficient of Frequency	ppm/°C	-	-13	-

Room Temperature : +25°C		Minimum	Typical	Maximum
Insertion Loss	dB	-	13.1	14.5
Amplitude Ripple (F _o +/- 3.0 MHz)	dB	-	0.6	1
Group Delay Variation (F _o +/- 3.0 MHz)	nsec	-	40	100
Relative Attenuation : 199 ~ 203 MHz	dB	40	45	-


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	260751B	
		Rev. Date	2006-10-12	
		Rev.	NJ4001-CS03	2/6

SAW Bandpass Filter 260751B



Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss


 <i>Integrated Technology Future</i>	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	260751B	
		Rev. Date	2006-10-12	
		Rev.	NJ4001-CS03	3/6

SAW Bandpass Filter 260751B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

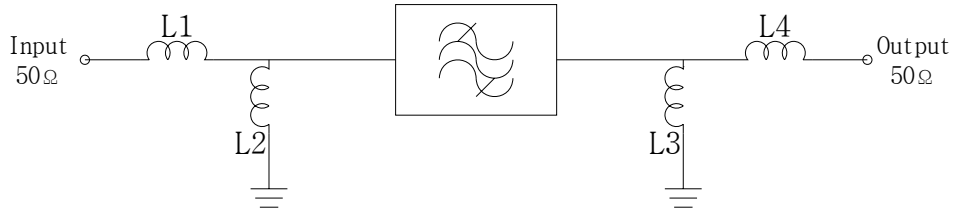

L1 = 120 nH, L4 = 120 nH
 L2 = 82 nH, L3 = 100 nH

5. Marking Configuration

ITF¹⁾ 04A001²⁾

260751B³⁾

●⁴⁾



- 1) Manufacturer name
- 2) Lot Number
- 3) Part Number
- 4) Pad Number 1 Index

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	260751B	
		Rev. Date	2006-10-12	
		Rev.	NJ4001-CS03	4/6

SAW Bandpass Filter 260751B







6. Typical Performance (at +25°C)

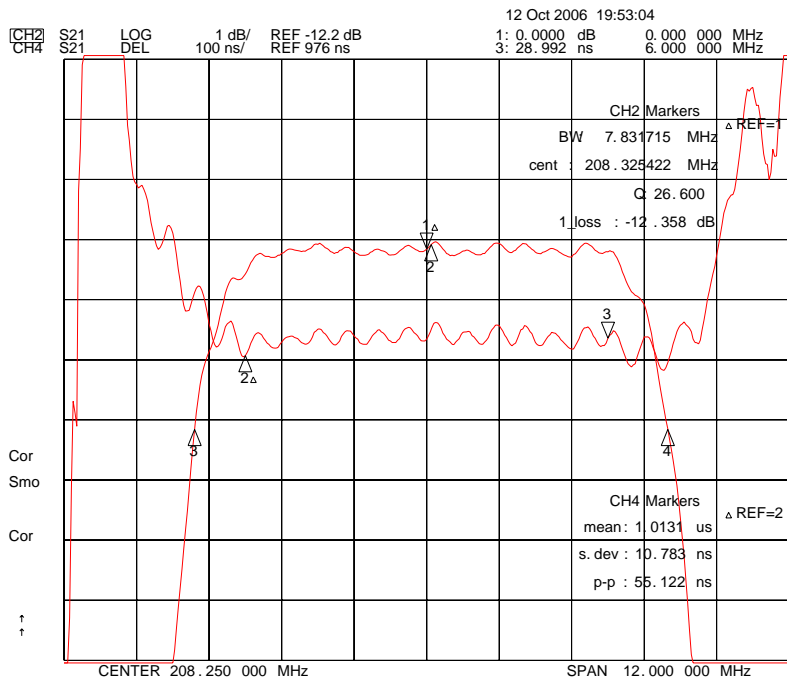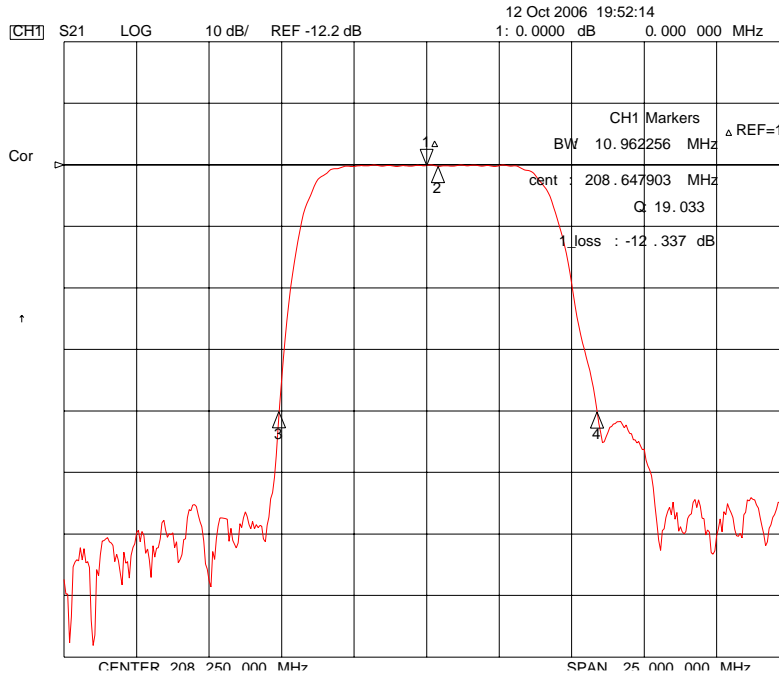

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	260751B	
Rev. Date	2006-10-12	
Rev.	NJ4001-CS03	5/6

SAW Bandpass Filter 260751B

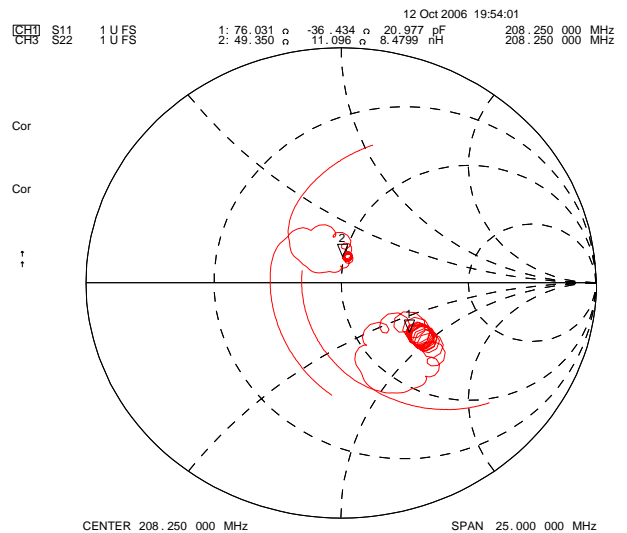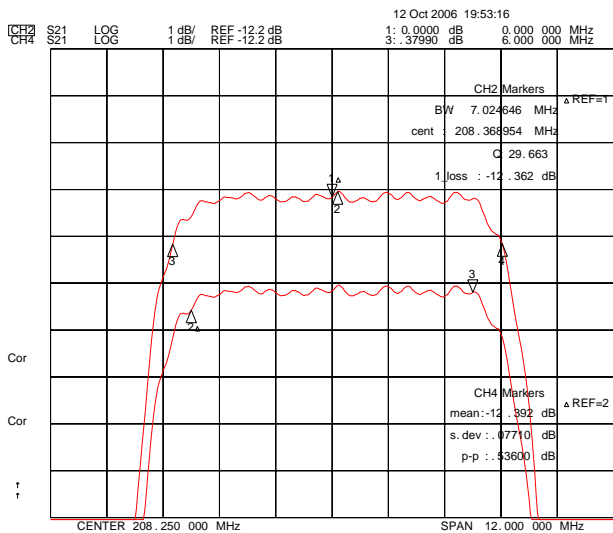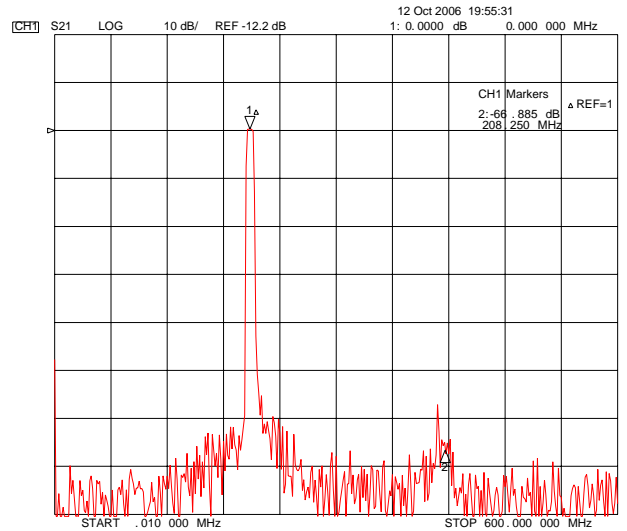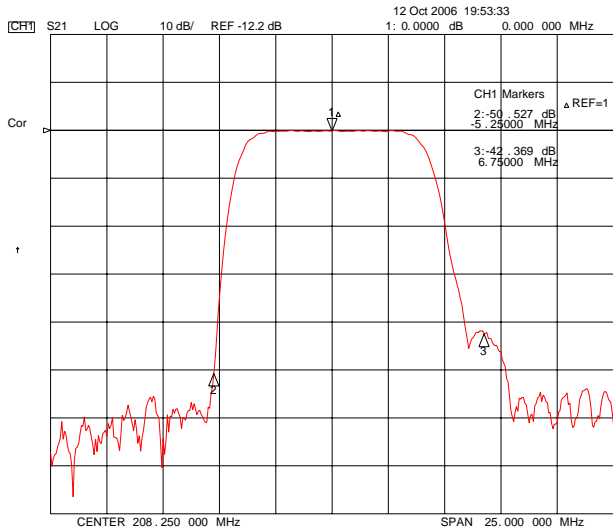

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	260751B	
Rev. Date	2006-10-12	
Rev.	NJ4001-CS03	6/6