


CATALOG No.	A	B	C
SREC 7 PJ	.21	.78	.502
③ SREC 11 PJ	.28	.78	.531
SREC 14 PJ	.28	.88	.625
③ SREC 18 PJ	.39	.88	.656
SREC 20 PJ	.28	1.06	.814
SREC 26 PJ	.28	1.25	1.000
SREC 34 PJ	.39	1.25	1.032
SREC 44 PJ	.39	1.48	1.267
SREC 50 PJ	.39	1.63	1.408

- ① MOLDING, MALE - DIALYL PHTHALATE, MIL-M-14, 3DG-F
- ② PIN CONTACT - LEADED COMM'L BRONZE, GOLD OVER COPPER
- ③ CLIP - BERYLLIUM COPPER, QQ-C-533, GOLD OVER COPPER
- ④ JACKSCREW - STAINLESS STEEL, QQ-S-763, PASSIVATING DIP
- ⑤ JACKSOCKET - STAINLESS STEEL, QQ-S-763, PASSIVATING DIP
- ⑥ LOCKWASHER - PHOSPHOR BRONZE, QQ-B-750, CAD. PLATE PLUS NAT. IRIDITE
- ⑦ NUT - BRASS, QQ-B-62G, CAD. PLATE PLUS NAT. IRIDITE

NOTE 1-
 1. ** INDICATES NO. OF CONTACTS
 2. WHEN 2-56 UNC-2 THREADS ARE REQUIRED, SPECIFY CATALOG NO. AND SUFFIX DASH NO. - 859
 ③ 3. CONTACTS WITH CLIPS ASSEMBLED ARE NOT INCLUDED WITH CONNECTOR & MUST BE ORDERED SEPARATELY
 ④ - 859 NOT AVAILABLE ON SIZE 44

FACES OF THE "SREC" MOLDINGS

MALE CONTACT NO. 4 THRU 50
 (FACE OF SIZE 18 NOT SHOWN)

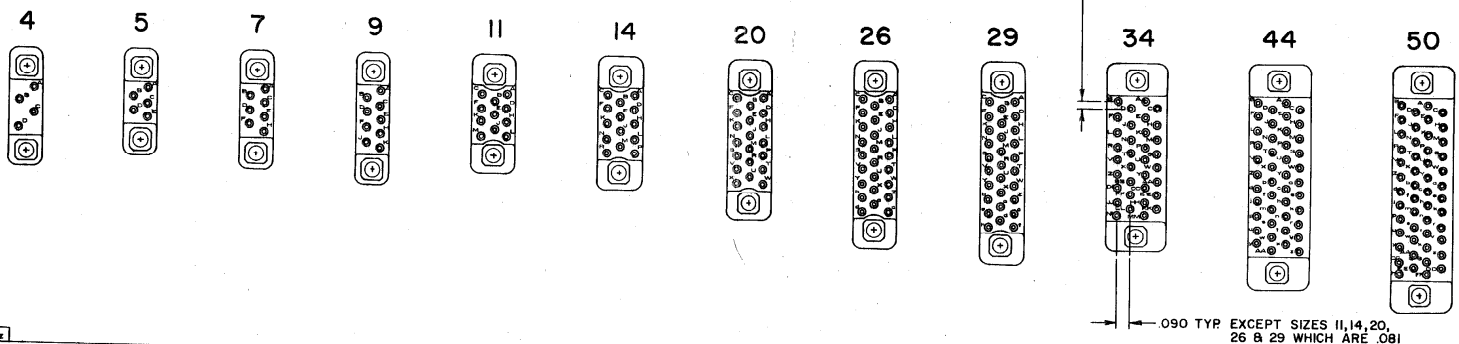

20906 B

REV	CHANGES	DATE	BY	CHKD
B	REVISED MOLDING 3	10-7-64	J.K.	JLG
C	REVISED MOLDING 3	10-7-64	J.K.	JLG
D	REVISED MOLDING 3	10-7-64	J.K.	JLG

TOLERANCE UNLESS OTHERWISE SPECIFIED: .XX ± .02 ANGULAR = √

TITLE: COMPOSITE OUTLINE ASSY
 SREC ** PJ
 SREC ** PJ-859

SCALE: 4:1
 DATE: 10-21-65
 DATE: 2-2-66
 DATE: 2-2-64

WINCHESTER ELECTRONICS, OAKVILLE, CONN.

DWG NO: 20906
 REV: B