



4 Way High Power Broadband Combiner From 800 MHz to 2.5 GHz Rated at 200 Watts, SMA

TECHNICAL DATA SHEET

PE20S0008

PE20S0008 is a passive 4 way High Power Broadband RF Combiner with 50 ohm SMA connectors operating from 800 to 2500 MHz, with a max input power at 200 watts. The PE20S0008 has greater than 12 dB typical isolation, less than 0.60 dB typical low insertion loss and a Max VSWR of 1.30:1; along with a phase balance of ± 5 degrees and an amplitude balance of ± 0.25 dB. The RF Combiner operates in a temperature range from -55°C to 85°C, with a foot print of 4"x3"x1.12".

Features

- 800 to 2500 MHz Frequency
- 200 watt max power
- Insertion Loss: < 0.6 dB
- Phase Balance: ± 5 degrees
- Amplitude Balance: ± 0.25 dB
- Isolation: >12 dB
- High Power Handling Capability

Applications

- Communications Systems
- Power Combining
- PCS,GSM,LTE, Cellular
- Amplifier Systems
- Amplifier Power Combining
- Wireless Infrastructures
- Defence Applications

Configuration

Input Connectors	SMA Female
Output Connector	SMA Female
Frequency Range	0.8 to 2.5 GHz
Design	Reactive
Number of Input Ports	4
Housing Material and Plating	Aluminum Alloy

Electrical Specifications (Values at 25°C, sea level)

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.8		2.5	GHz
Impedance		50		Ohms
Insertion Loss			0.6	dB
Input Power			200	Watts
Output VSWR			1.3:1	
Isolation	12			dB
Phase Balance		± 5		Degrees
Flatness		± 0.25		dB

Mechanical Specifications

Temperature

Operating Range -55 to +85 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 800 MHz to 2.5 GHz Rated at 200 Watts, SMA PE20S0008](#)



4 Way High Power Broadband Combiner From
800 MHz to 2.5 GHz Rated at 200 Watts, SMA

TECHNICAL DATA SHEET

PE20S0008

Size

Length	4 in [101.6 mm]
Width	3 in [76.2 mm]
Height	1.12 in [28.45 mm]

Connectors

Description	Input Connector	Output Connectors
Connector Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 800 MHz to 2.5 GHz Rated at 200 Watts, SMA PE20S0008](#)





4 Way High Power Broadband Combiner From
800 MHz to 2.5 GHz Rated at 200 Watts, SMA

TECHNICAL DATA SHEET

PE20S0008

Performance Data

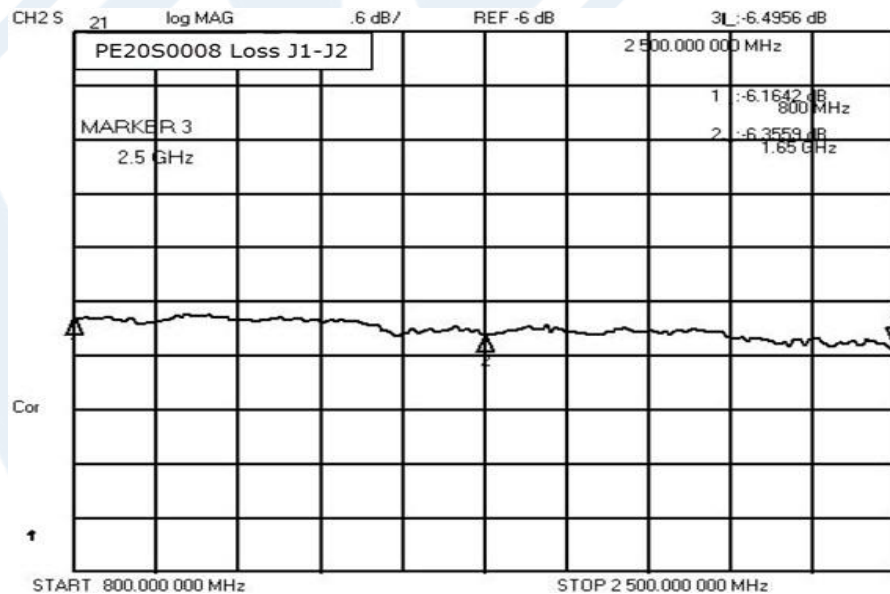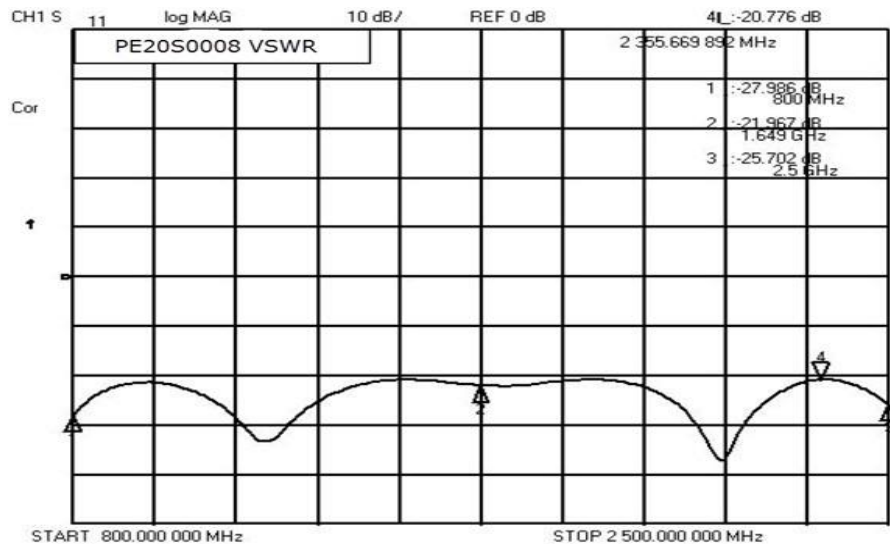



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 800 MHz to 2.5 GHz Rated at 200 Watts, SMA PE20S0008](#)



4 Way High Power Broadband Combiner From
800 MHz to 2.5 GHz Rated at 200 Watts, SMA

TECHNICAL DATA SHEET

PE20S0008

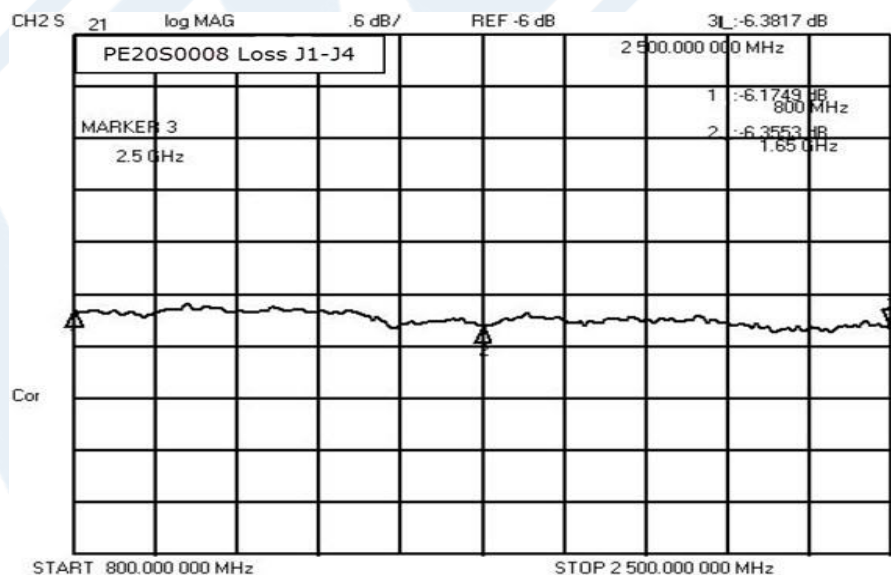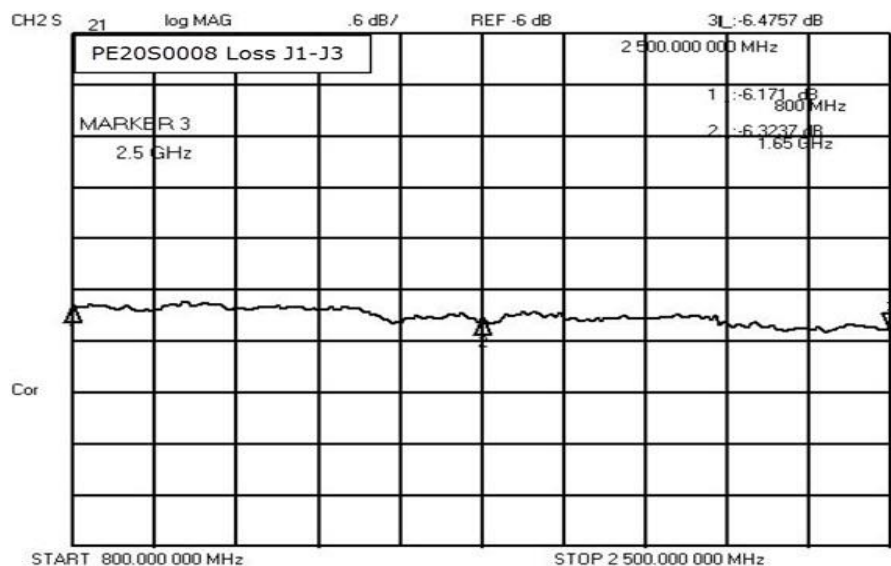


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 800 MHz to 2.5 GHz Rated at 200 Watts, SMA PE20S0008](#)



4 Way High Power Broadband Combiner From
800 MHz to 2.5 GHz Rated at 200 Watts, SMA

TECHNICAL DATA SHEET

PE20S0008

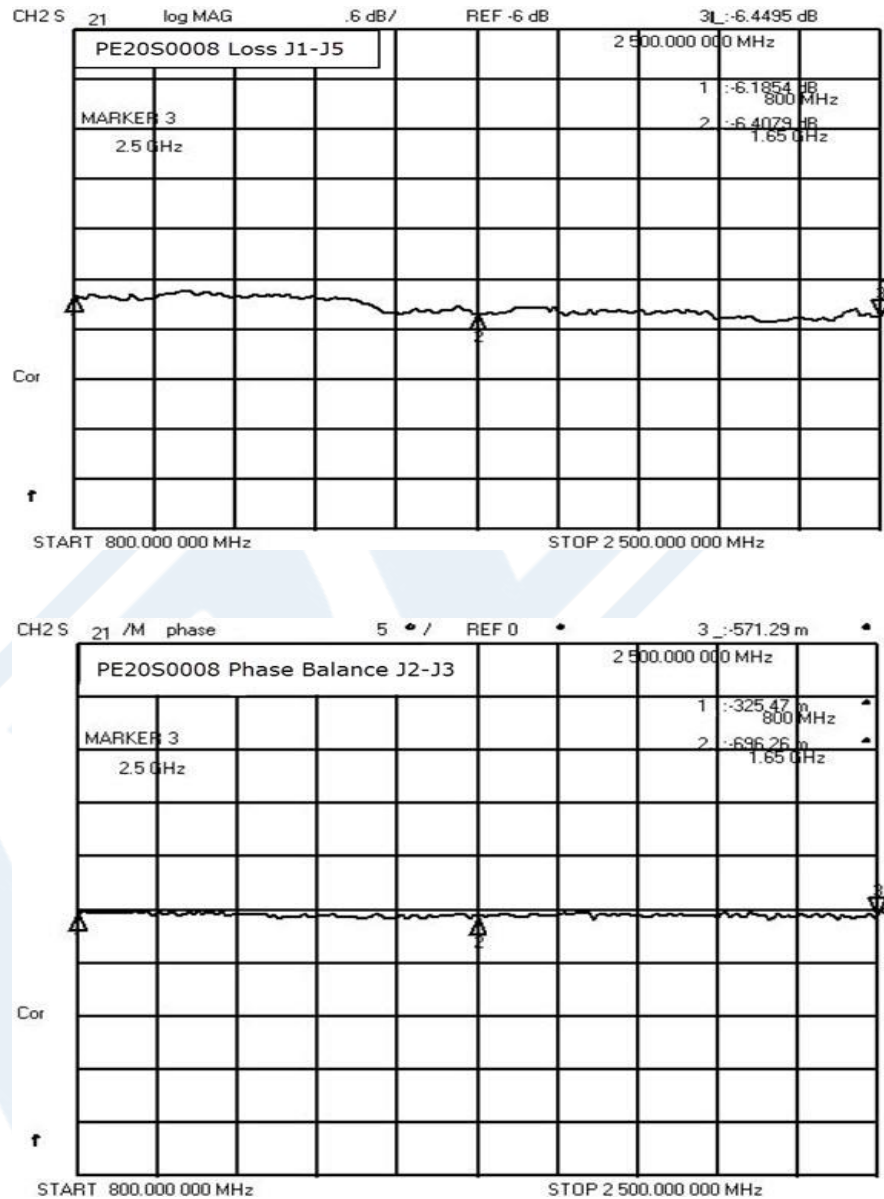



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 800 MHz to 2.5 GHz Rated at 200 Watts, SMA PE20S0008](#)



4 Way High Power Broadband Combiner From
800 MHz to 2.5 GHz Rated at 200 Watts, SMA

TECHNICAL DATA SHEET

PE20S0008

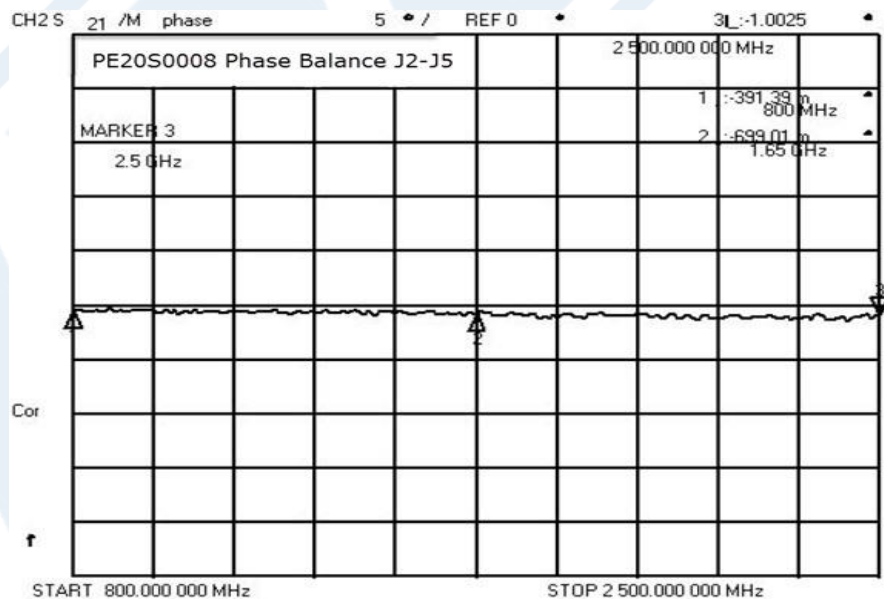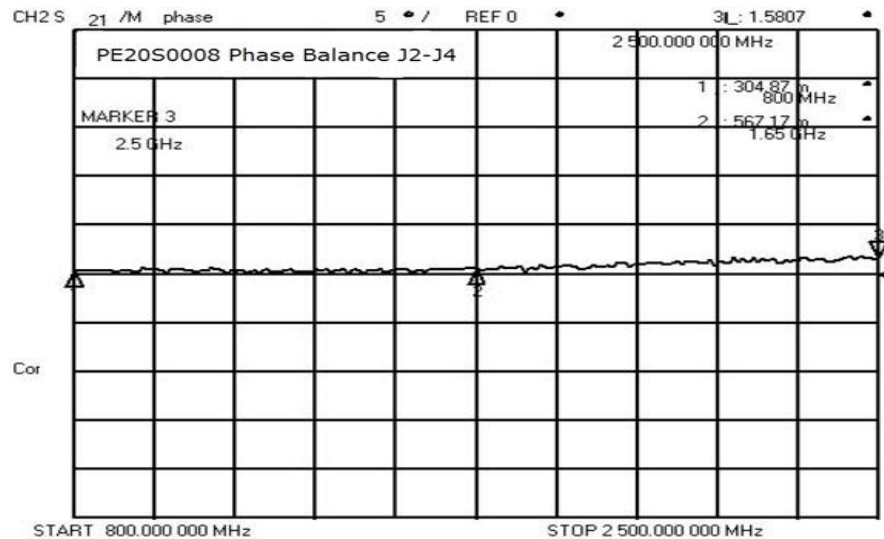


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 800 MHz to 2.5 GHz Rated at 200 Watts, SMA PE20S0008](#)



4 Way High Power Broadband Combiner From
800 MHz to 2.5 GHz Rated at 200 Watts, SMA

TECHNICAL DATA SHEET

PE20S0008

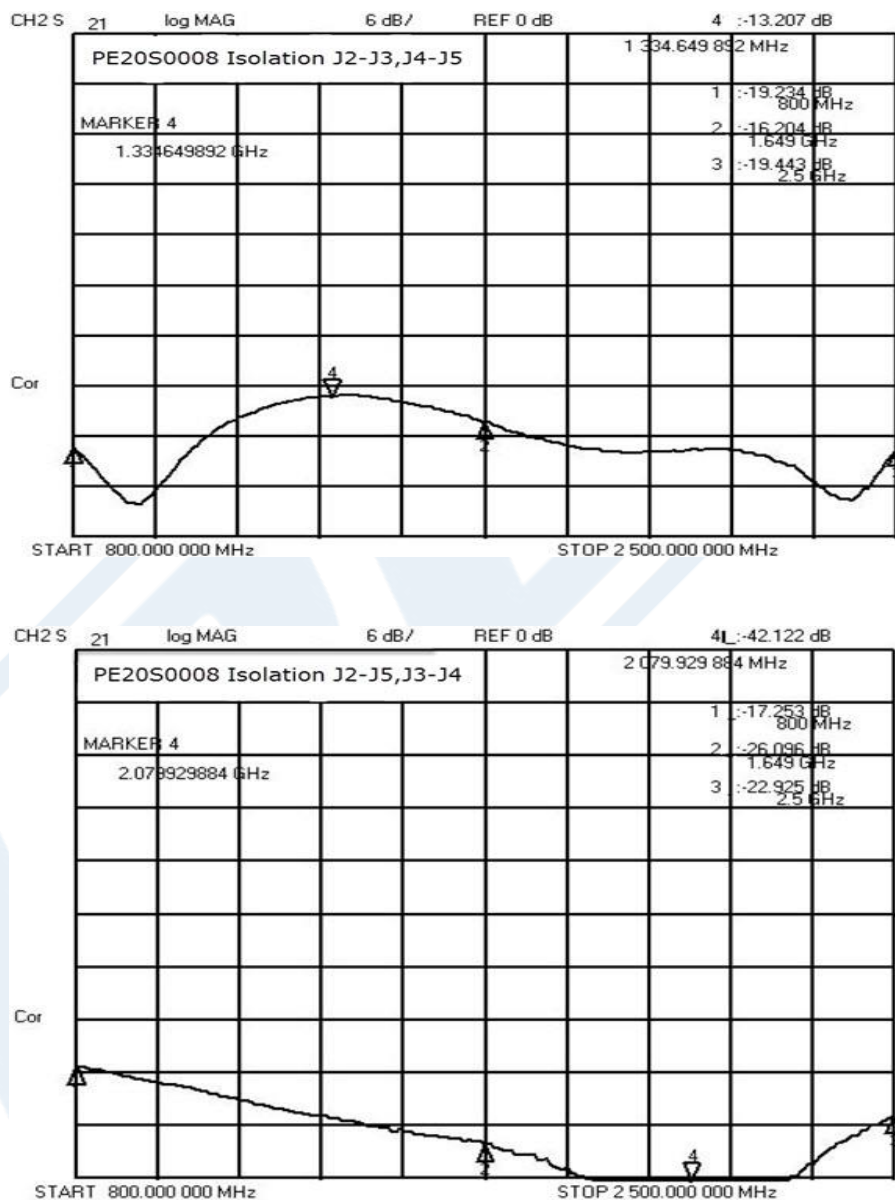

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 800 MHz to 2.5 GHz Rated at 200 Watts, SMA PE20S0008](#)



4 Way High Power Broadband Combiner From 800 MHz to 2.5 GHz Rated at 200 Watts, SMA

TECHNICAL DATA SHEET

PE20S0008

4 Way High Power Broadband Combiner From 800 MHz to 2.5 GHz Rated at 200 Watts, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [4 Way High Power Broadband Combiner From 800 MHz to 2.5 GHz Rated at 200 Watts, SMA PE20S0008](http://www.pasternack.com/4-way-sma-broadband-power-combiner-800-mhz-2.5-ghz-200-watts-pe20s0008-p.aspx)

URL: <http://www.pasternack.com/4-way-sma-broadband-power-combiner-800-mhz-2.5-ghz-200-watts-pe20s0008-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE20S0008 CAD Drawing

4 Way High Power Broadband Combiner From 800 MHz
to 2.5 GHz Rated at 200 Watts, SMA

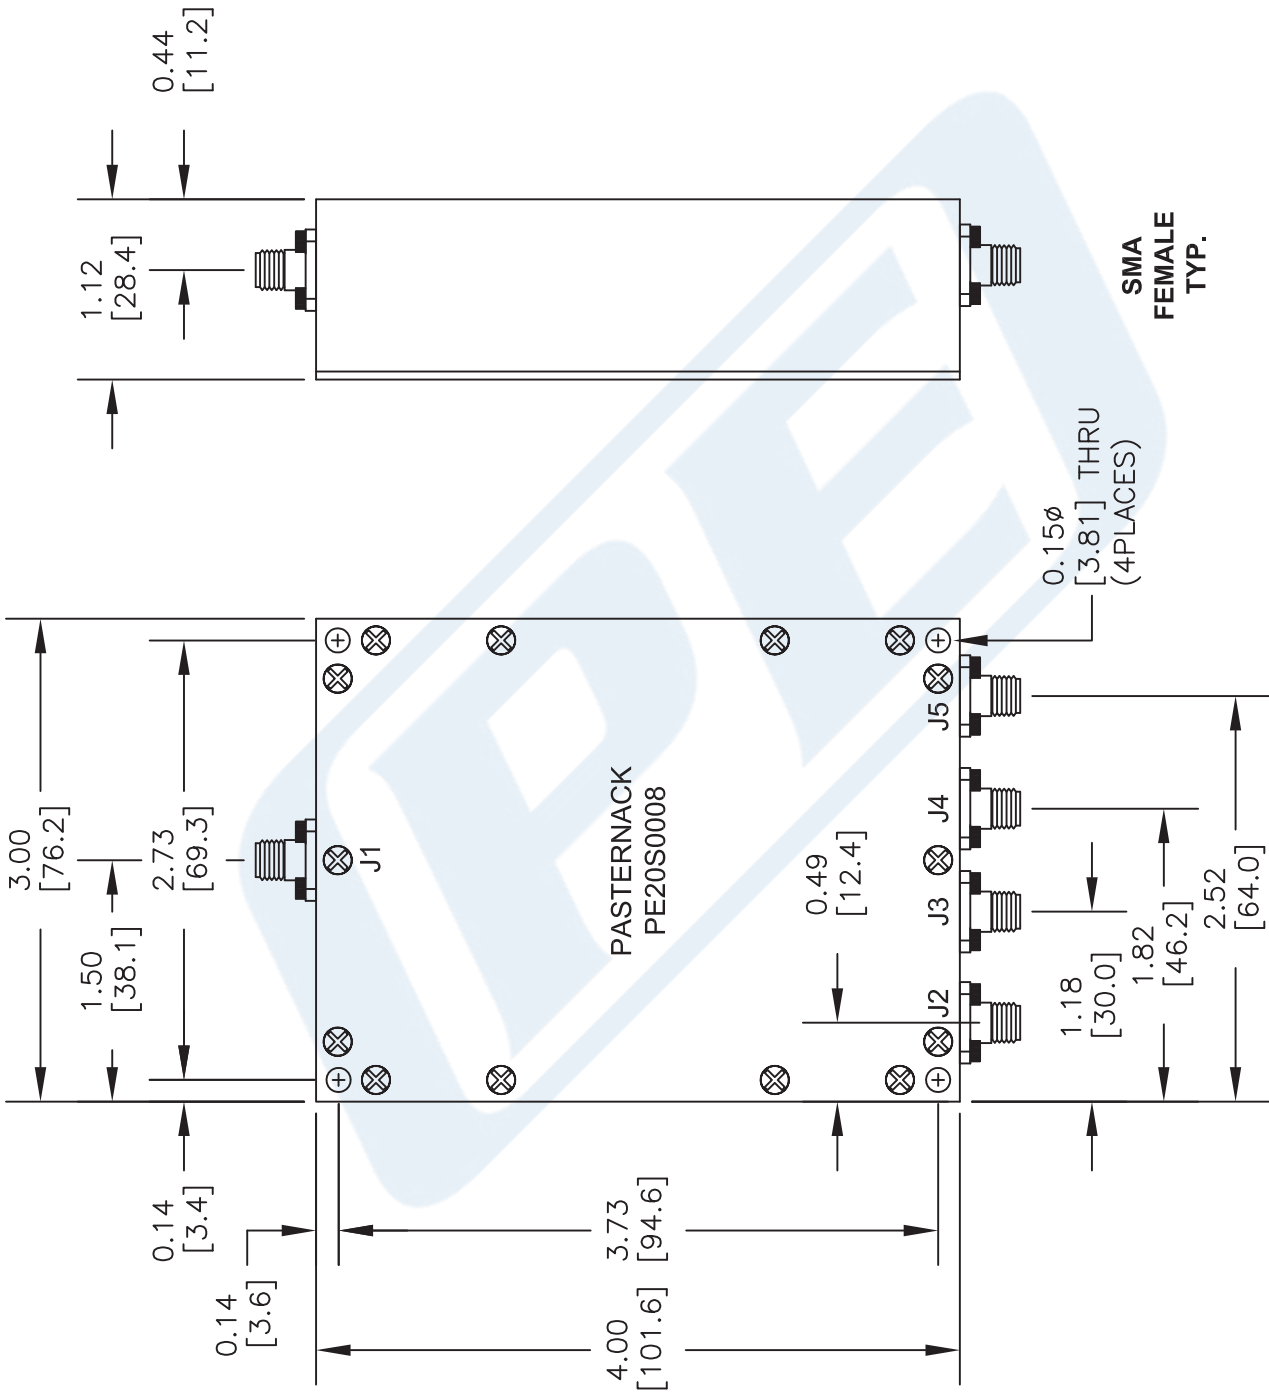

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE20S0008

FSCM NO. 53919

150

SIZE A

SCALE N/A

CAD FILE 081814

PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com