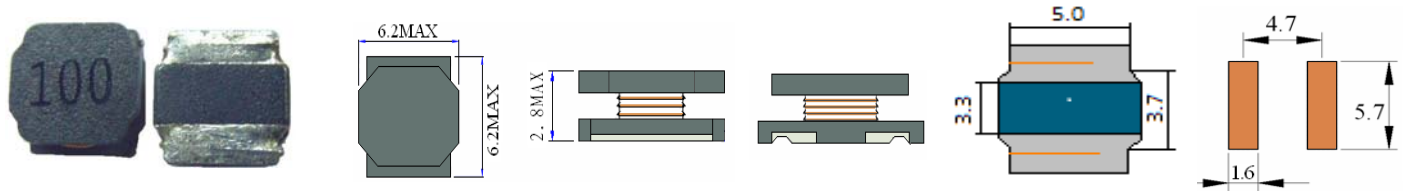


SMD POWER INDUCTORS

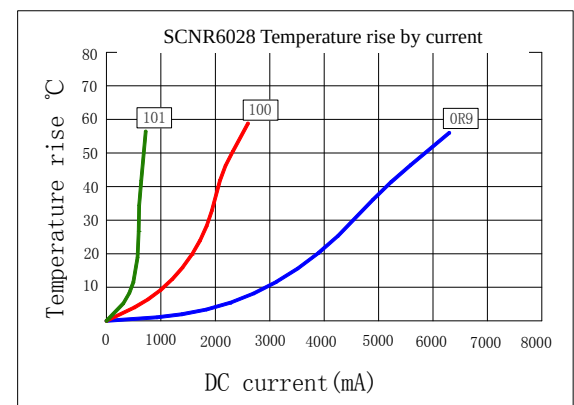
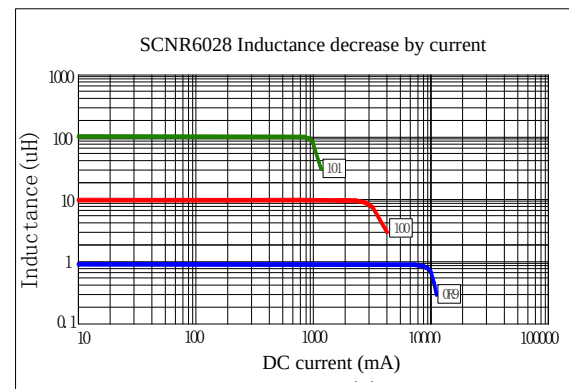


- Features

- ### 1. Open frame construction.



ELECTRICAL CHARACTERISTICS

[illegible]

(1). Inductance tested at 0.25V, 0ADC and 25°C.

Tolerance of inductance: 0.9uH-3.0uH: $\pm 30\%$ (N).

4.7uH-100uH: $\pm 20\%$ (M).

(2).DCR measured at 25°C.

(3). The DC current at which the inductance decreases by 30% from its initial value.

(4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.

© 2019 Signal Transformer –Specification subject to change without notice. 12.19



belfuse.com/signal

128 Atlantic Avenue, Lynbrook, NY 11563
Toll Free 866-239-5777 • Tel 516-239-5777 • Fax 516-239-7208
Sales@signaltransformer.com • techhelp@signaltransformer.com