4801, Plug, solder terminal, screened, 2.5 mm, 2-pole, straight, UK-Connector



PHASE-OUT

Description

- Solder terminal :
  for cable mounting
- Data and Signal transfer
- Data and Signal Connectors 2-pole , shielded , straight


References

Alternative: Housing insulated 4801.1210
Last order date: 30.06.2016

Technical Data

Diameter	2.5 mm
Number of Poles	2-pole
Ratings DC	1 A / 12 VDC
Ratings AC	0.65 A / 12 VAC
Dielectric Strength	500 VDC
Insulation Resistance	> 10000 MΩ @ 500 VDC
Allowable Operation Temp.	-20 °C to 70 °C
Terminal	solder terminal
Housings	screened
Style	straight
Lifetime	10000 Insertions

Dimensions

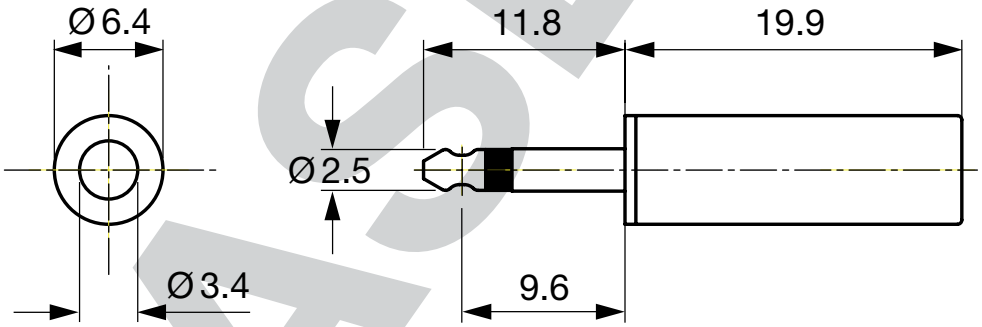

All Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Data and Signal Plug/ Sockets	2.5	2-pole	solder terminal	4801.1200

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER

Packaging unit

100 Pcs

21.11.2016

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.