


SHEET 1 OF 1

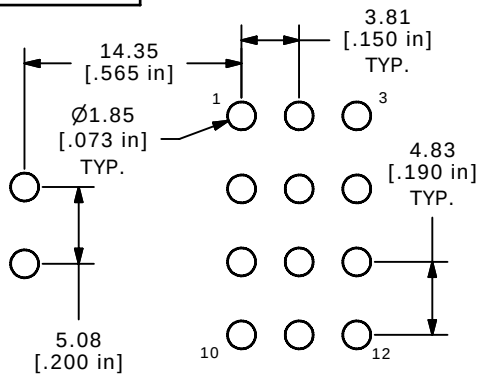

P.C. MOUNTING

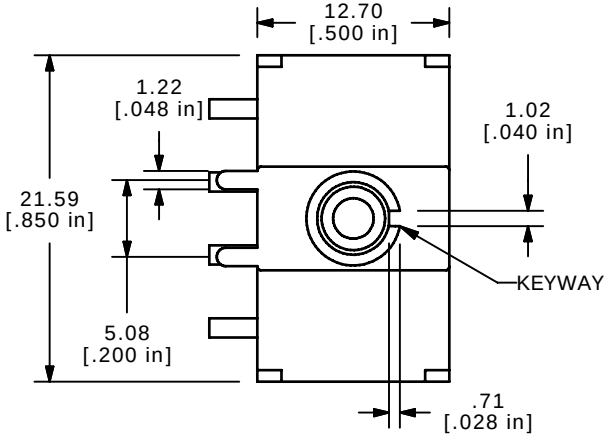


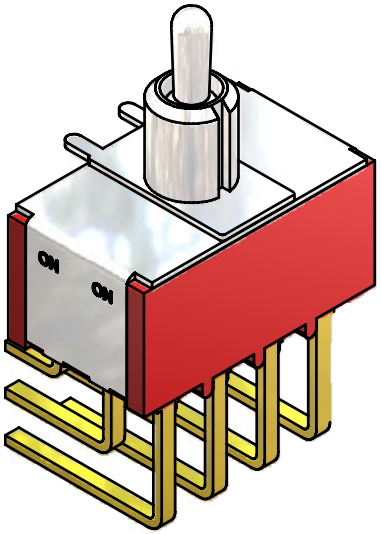


ISOMETRIC


▲

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6, 8-9, 11-12	OPEN	2-1, 5-4, 8-7, 11-10

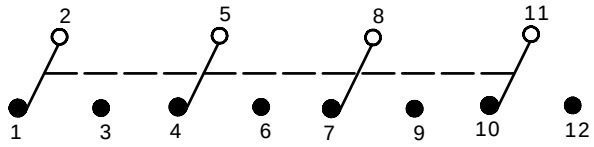

CIRCUI: 4PDT

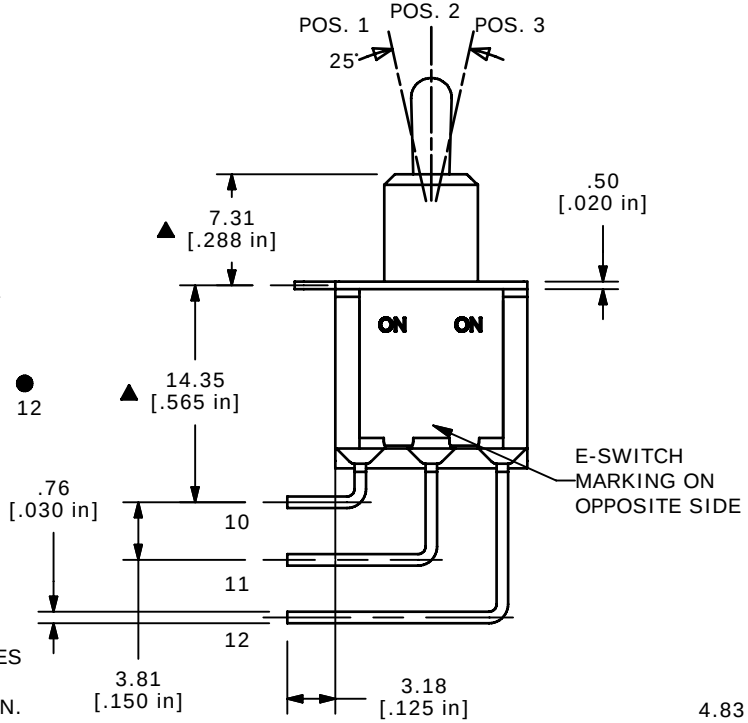

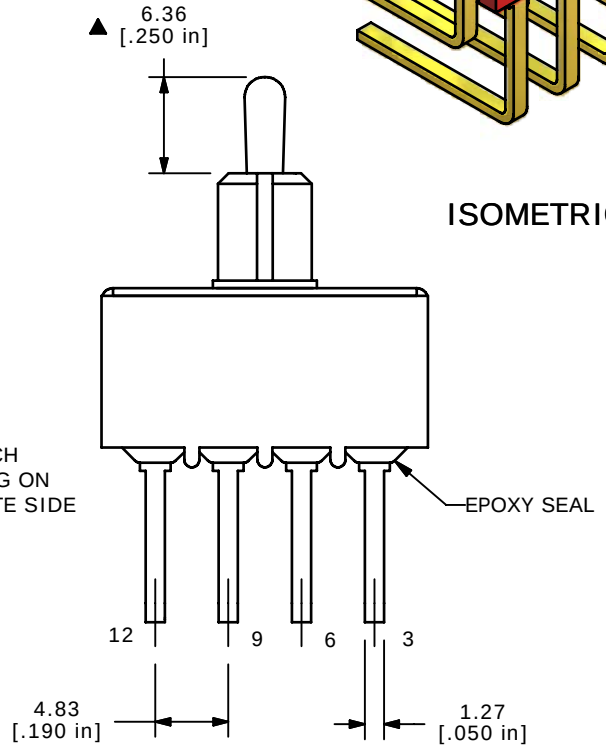

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X= ±0.4
   X.XX= ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. ▲ PLATING MATERIAL: SILVER
5. RATING: 5A@120VAC OR 28VDC; 2A@250VAC.
6. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

REV	PCR NO	DESCRIPTION	DATE	BY
C	17878	REDRAWN AND DIM UPDATED	11/27/07	RC

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE	1004P1T2B4M7QE			
SCALE 2:1	DATE 11/27/2007	DR RC	DWG T141008	REV C