
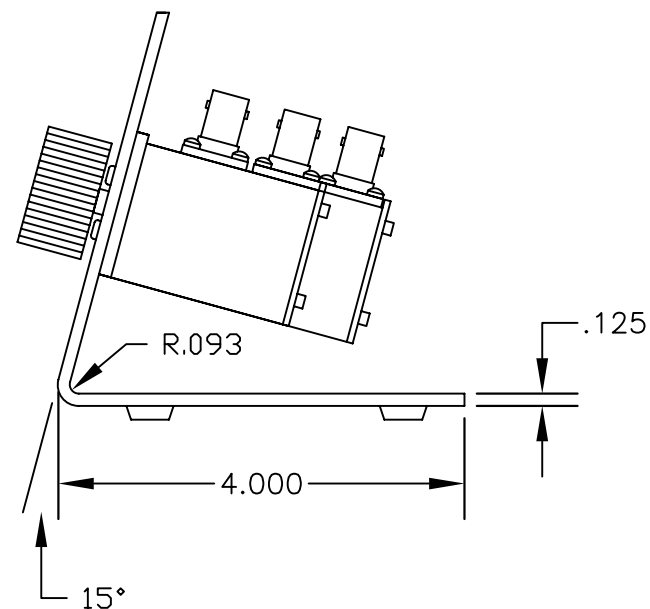


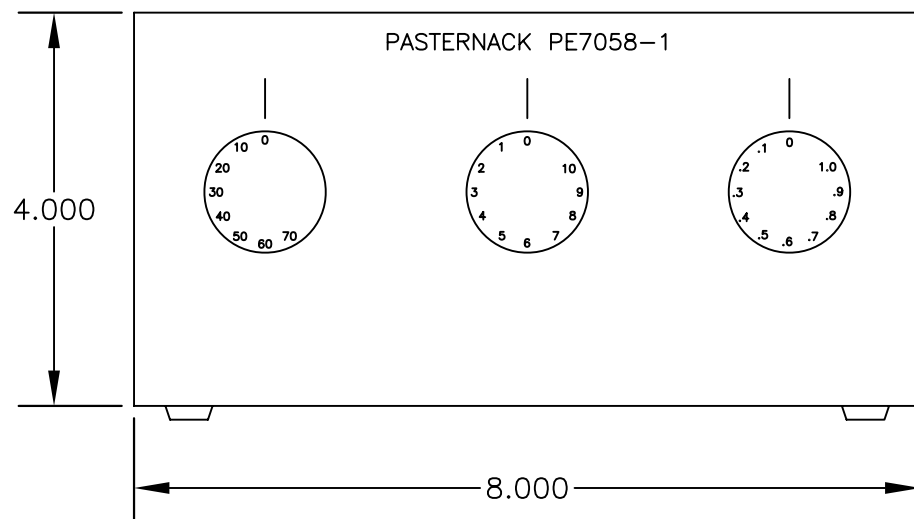

SPECIFICATIONS

FREQUENCY RANGE: DC TO 1 GHz

ATTENUATION RANGE: 0 TO 81 dB IN .1 dB STEPS

IMPEDANCE: 50 OHMS

ATTENUATION ACCURACY:

DC TO 30 MHz:	0 TO 1 dB, ± 0.02 dB
	1 TO 10 dB, ± 0.1 dB
30 TO 500 MHz:	10 TO 81 dB, ± 0.2 dB
	1 TO 10 dB, ± 0.2 dB
500 TO 1000 MHz:	10 TO 81 dB, ± 0.5 dB
	0 TO 1 dB, ± 0.06 dB
	1 TO 10 dB, ± 0.3 dB
	10 TO 81 dB, ± 0.8 dB

VSWR: DC TO 30 MHz, 1.1:1 MAXIMUM

30 TO 500 MHz, 1.3:1 MAXIMUM

500 TO 1000 MHz, 1.5:1 MAXIMUM

AVERAGE POWER: 1 WATT WITH 1000 WATTS PEAK

OPERATING TEMPERATURE: -20°C TO 85°C



PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE7058-1

DES.

THREE STAGE BENCH MOUNT ROTARY
ATTENUATOR FREQUENCY RANGE: DC TO 1
GHz

SIZE A

FSCM NO. 53919

CAD FILE

082202

SCALE N/A

127

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.