



1. Mechanical Dimensions:

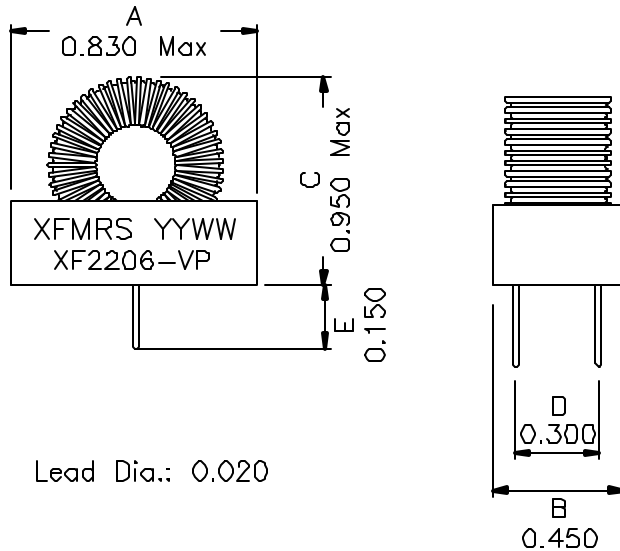

2. Schematic:



3. Electrical Specifications:

Inductance: 220uH±15% @10KHz, 100mV

DC Res.: 0.140 Ohms Max

Rated Current: 1.4 Adc Max

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability
2. Flammability, UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: 0°C to +70°C

DOC. REV. A/1

XFMRs Inc.	Title: VERTICAL INDUCTOR			
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.010 Dimensions in Inch		P/N: XF2206-VP	REV. A
	DWN.	廖玉坤	Sep-05-01	
	CHK.	李清儿	Sep-05-01	
	APP.	BW	Sep-05-01	