

Miniature Power Relay PTF

- 2 pole 15 A, 2 CO contacts
- DC or AC coil
- Plug-in version, PCB or chassis mount version
- RoHS compliant (Directive 2002/95/EC)

Applications

Panel boards, domestic appliances



F0281-A

Approvals

VDE REG.-Nr. A379, cULus E58304
Technical data of approved types on request

Contact data

Contact configuration	2 CO contacts
Contact set	single contact
Type of interruption	micro disconnection
Rated current	10 A / 250 VAC 15 A / 120 VAC
Rated voltage / max.switching voltage AC	240/400 VAC
Maximum breaking capacity AC	2500 VA / 250 VAC 1800 VA / 120 VAC
Limiting making capacity, max 20 ms	20 A / 250 VAC 30 A / 120 VAC
Contact material	AgNi90/10
Minimum contact load	5V/100mA
Mechanical endurance DC coil	20x10 ⁶ cycles
AC coil	15x10 ⁶ cycles
Rated frequency of operation with / without load	6/600 min ⁻¹

Contact ratings

Type	Load	Cycles
PTF2	15 A, 120 VAC, NO, DC coil / AC coil	100x10 ³ / 50x10 ³
PTF2	10 A, 250 VAC, NO, DC coil / AC coil	200x10 ³ / 100x10 ³
PTF2	10 A, 24 VDC, NO, DC coil / AC coil	100x10 ³ / 50x10 ³



Coil data

Rated coil voltage range DC coil	6...220 VDC
AC coil	6...230 VAC
Coil power DC coil	0.75 W
AC coil	1.0 VA
Operative range DC coil, AC-coil 50Hz	2
AC coil 60 Hz at 70°C, % of U _{rtid}	90...110%

Coil versions, DC-coil

Coil code		Rated	Operate	Release	Coil	Rated coil
STD	LED	voltage	voltage	voltage	resistance	power
	bipolar	VDC	VDC	VDC	Ohm	mW
006	L06	6	4.5	0.6	48±10%	750
012	L12	12	9.0	1.2	192±10%	750
024	L24	24	18.0	2.4	777±10%	741
048	L48	48	36.0	4.8	3072±10%	750
060	L60	60	45.0	6.0	4845±12%	743
110	M10	110	82.5	11.0	16133±15%	750
220	N20	220	165.0	22.0	64533±15%	750

All figures are given for coil without preenergization, at ambient temperature +23°C

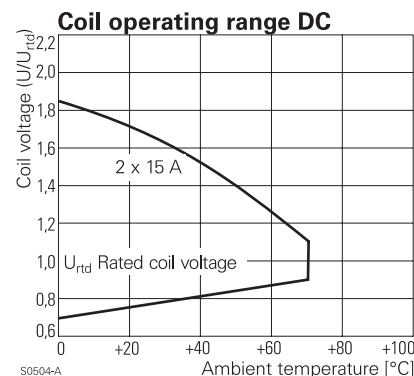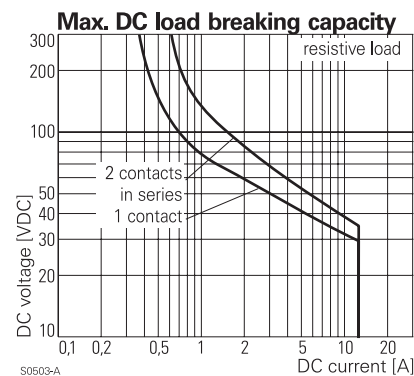

Miniature Power Relay PTF (Continued)

Coil versions, AC-coil 50/60 Hz

Coil code	LED	Rated voltage	Operate voltage 50/60Hz	Release voltage 50/60Hz	Coil resistance	Rated coil power 50/60Hz
		VAC	VAC	VAC	Ohm	VA
506	R06	6	4.8/5.4	1.8	11±10%	1.0/0.85
512	R12	12	9.6/10.8	3.6	48±10%	1.0/0.85
524	R24	24	19.2/21.6	7.2	192±10%	1.0/0.79
548	R48	48	38.4/43.2	14.4	777±10%	1.0/0.87
560	R60	60	48.0/54.0	18.0	1306±10%	1.0/0.87
615	S15	115	92.0/103.5	34.5	4845±12%	1.0/0.86
730	T30	230	184.0/207.0	69.0	19465±15%	1.0/0.90

All figures are given for coil without preenergization, at ambient temperature +23°C

Insulation

Dielectric strength coil-contact circuit	2500 V _{rms}
open contact circuit	1200 V _{rms}
adjacent contact circuits	2500 V _{rms}
Clearance / creepage coil-contact circuit	≥ 3.1/3.1 mm
adjacent contact circuits	≥ 4.4/8.8 mm
Material group of insulation parts	≥ IIIa
Insulation to IEC 60664-1	
Type of insulation coil-contact circuit	basic
open contact circuit	functional
adjacent contact circuits	basic
Rated insulation voltage	250 V
Pollution degree	2
Rated voltage system	240/400 V
Overvoltage category	III

Other data


RoHS - Directive 2002/95/EC	compliant
Ambient temperature range	-40...+70°C
Operate- / release time	15/10 ms
Bounce time NO / NC contact	5 ms
Vibration resistance (function) NO / NC contact	7/4 g
Shock resistance (function) NO / NC contact	20/5 g
Category of protection	RTII - flux proof
Resistance to soldering heat	270°C / 10 s
Relay weight	30 g
Packaging unit	20 pcs

Accessories

For details see datasheet

Accessories Miniature Power Relay PTF


Coil operating range AC

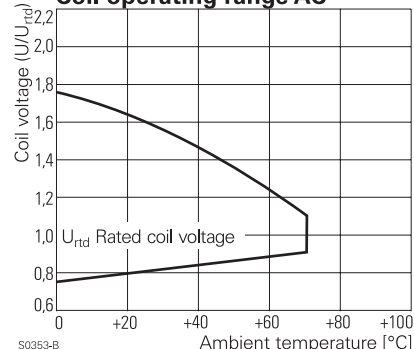


S0353-B

PCB layout / terminal assignment

Bottom view on pins




S0507-AA



S0507-AB


Dimensions

Solder- and plug-in terminals (standard version)

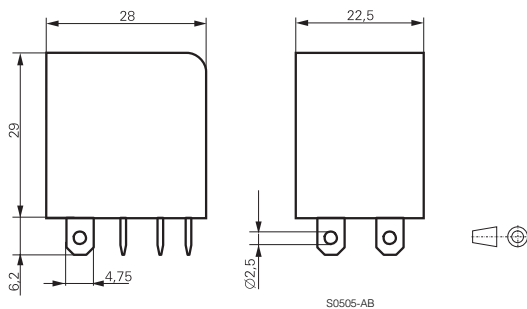

S0505-AB

PCB version

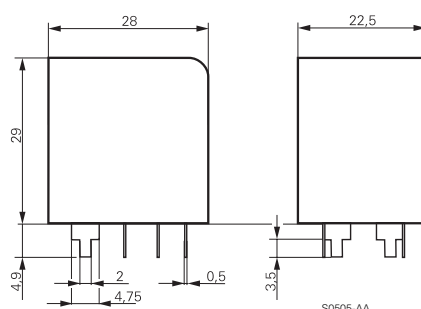


S0505-AA

Miniature Power Relay PTF (Continued)

Dimensions

Flange mount version

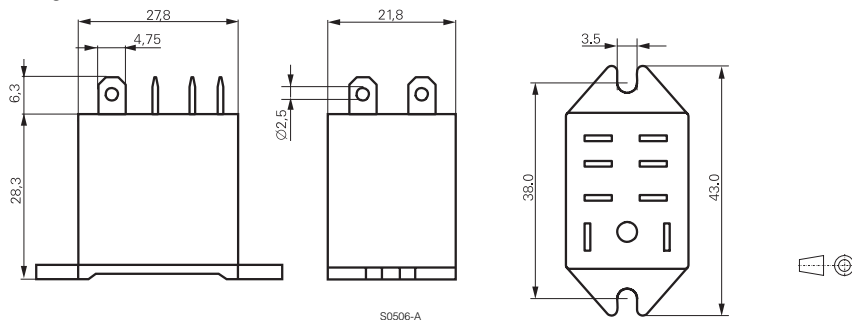

Product key

Type	P	T	F				
Contact material							
Version							
Coil							

Coil code: please refer to coil versions table, preferred types in bold print

Product key	Contacts	Cont. material	Terminal	Coil	Coil	Part number
PTF20024	2 CO contacts	AgNi 90/10	quick connect term.	DC-coil	24 VDC	0-1461937-3
PTF21024			PCB			1-1461937-0
PTF20524			quick connect term.	AC-coil	24 VAC	0-1461938-3
PTF20615					115 VAC	0-1461938-7
PTF20730					230 VAC	0-1461938-9
PTF21524			PCB		24 VAC	1-1461938-2
PTF21615					115 VAC	1-1461938-6
PTF21730					230 VAC	1-1461938-8
PTF20L24			quick connect term.	DC + LED	24 VDC	0-1461944-3
PTF20R24				AC + LED	24 VAC	0-1461945-3
PTF20S15					115 VAC	0-1461945-7
PTF20T30					230 VAC	0-1461945-9
PTF22024			flange mount cover	DC-coil	24 VDC	0-1721058-3
PTF22524				AC-coil	24 VAC	1-1721058-0
PTF22615					115 VAC	1-1721058-4
PTF22730					230 VAC	1-1721058-6