



PRODUCT SPECIFICATION

Part Number

PT644857B-TLMWD-EMR04


| | |
|----------------------|----------------------------------|
| CUSTOMER | |
| CUSTOMER PART NUMBER | |
| DESCRIPTION | 5.7" TFT LCD, Medium Bright, RTP |
| APPROVED BY | |
| DATE | |

**1. Table of Contents**

| No. | Contents | Page |
|------------|---|-------------|
| 1 | Table of Contents | 2 |
| 2 | Record of Revisions | 3 |
| 3 | Module Numbering System | 4 |
| 4 | Application | 5 |
| 5 | Features | 5 |
| 6 | General Specifications | 5 |
| 7 | Absolute Maximum Ratings | 6 |
| 8 | Electrical Characteristics | 7 |
| 9 | Block Diagram | 10 |
| 10 | Input / Output Terminals Pin Assignment | 11 |
| 11 | Interface Timing | 14 |
| 12 | Optical Characteristics | 18 |
| 13 | Reliability Test | 21 |
| 14 | Packaging | 22 |
| 15 | Precautions | 23 |
| 16 | Outline Drawing | 25 |
| 17 | Definition of Labels | 26 |
| 18 | Incoming Inspection Standards | 28 |
| | | |
| | | |
| | | |



3. Module Numbering System

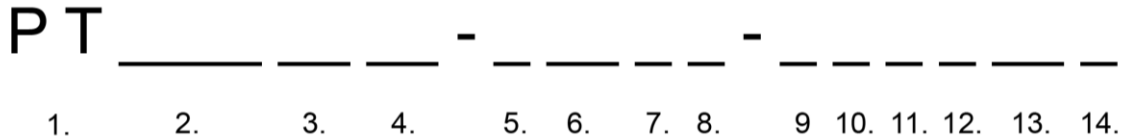

1. P-TEC TFT

8. VIEWING DIRECTION

D: 6 o'clock
U: 12 o'clock
F: Full Viewing Angle

2. LENGTH x WIDTH PIXELS

If third character is a zero, it is removed to shorten part number. Example: 240 x 320 = PT3224

9. A ~ Z CODE

Assigned by P-tec

3. DIAGONAL DIMENSIONS

Example: 3.5" display = 35 in part number

11. TEMPERATURE RANGE

Normal: Left Blank
Wide: X

4. PRODUCT VERSION

Series assigned by P-tec

12. LUMINANCE

Blank: Normal (<300 nit)
M: Middle (>= 300 nit)
H: High (> 600 nit)

5. LCD MODE

T: TN
I: IPS
V: VA

13. TOUCH PANEL OPTION

No TP: Left Blank
C: Capacitive TP
R: Resistive TP

6. POLARIZER

LM: Transmissive
LF: Transflective

14. SPECIAL CHARACTERS

Customer special requirements

7. BACKLIGHT COLOR

No Backlight: Left Blank
W: White
B: Blue/Green
S: Yellow/Green



4. Application

This specification is applied to the 5.7 inch VGA supported TFT-LCD module, and can display true 262,144 colors(6 bit/ color). The module is designed for OA, Car TV application and other electronic products which require flat panel display of digital signal interface. This module is composed of a 5.7”TFT-LCD panel, a driver circuit and LED backlight unit and used as the input devices for general electric appliances via both finger and pen-entry.

5. Features

- VGA (640×480 pixels) resolution.
- LVDS Receiver 18 bit Interface
- Dot inversion mode with stripe type.
- Transparent Touch panel
 - 4-Wire
 - Analog Resistive

6. General Specifications

| Item | Specifications | Unit |
|---------------------|---|------|
| Screen Size | 5.7 (Diagonal) | inch |
| Display Format | 640RGB(H)×480(V) | dot |
| Active Area | 115.2(H)×86.4(V) | mm |
| Dot Size | 0.060(H)×0.180(V) | mm |
| Pixel Configuration | RGB Vertical Stripe | - |
| Display Mode | TN Type Transmissive Mode Normally White | - |
| Surface Treatment | Anti-Glare and Hard Coating(3H) | - |
| Viewing Direction | 6 O'clock (The Gray Inversion will appear at this direction) | - |
| Outline Dimension | 144.0(W)×104.6(H)×14.5(D) | mm |
| LVDS Receiver IC | THine THC63LVDF84A | - |
| Weight | 194 | g |
| RoHS Compliance | P-tec certifies this product to be in compliance with European Union Directive 2011/65/EU on the restriction of certain hazardous substances in electrical and electronic equipment | - |



7. Absolute Maximum Ratings

7.1 Absolute Ratings of Environment

| Item | Symbol | Value | | Unit | Note |
|-------------------------------|-----------------|-------|------|------|------|
| | | Min. | Max. | | |
| Storage Temperature | T _{ST} | -30 | +80 | °C | (1) |
| Operating Ambient Temperature | T _{OP} | -20 | +70 | °C | (1) |

Note (1) Temperature and relative humidity range are shown in the figure below.

(a) 90%RH Max. ($T_a \leq 40^\circ\text{C}$).

(b) Wet-bulb temperature should be 39°C Max. ($T_a > 40^\circ\text{C}$).

(c) No condensation.

7.2 Electrical Absolute Ratings

7.2.1 TFT-LCD Module

($T_a = 25 \pm 2^\circ\text{C}$, $\text{GND} = V_{SS} = 0\text{V}$)

| Item | Symbol | Value | | Unit | Note |
|----------------------------|-----------------|-------|-----------------------|------|------|
| | | Min. | Max. | | |
| Power Supply Voltage | V _{CC} | -0.3 | 4.0 | V | - |
| LVDS Driver Output Voltage | - | -0.3 | V _{CC} + 0.3 | V | - |

7.2.2 Backlight Unit

($T_a = 25 \pm 2^\circ\text{C}$)

| Item | Symbol | Value | | Unit | Note |
|---------------------------|----------------|-------|------|------|------|
| | | Min. | Max. | | |
| Current of Backlight Unit | I _B | - | 250 | mA | (1) |
| Reverse voltage | V _R | - | 15 | V | (1) |

Note (1) Permanent damage to the device may occur if maximum values are exceeded or reverse voltage is loaded.


**8. Electrical Characteristics****8.1 TFT-LCD Module**

(Ta=25±2°C)

| Item | Symbol | Value | | | Unit | Note |
|---|-----------------|-------|---------|------|------|------|
| | | Min. | Typ. | Max. | | |
| Power Supply Voltage | V _{CC} | 3.0 | 3.3 | 3.6 | V | - |
| Power Supply Current | I _{CC} | - | 225 | 315 | mA | - |
| Differential Input High Threshold Voltage | V _{TH} | - | - | 100 | mV | - |
| Differential Input Low Threshold Voltage | V _{TL} | -100 | - | - | mV | - |
| Power Consumption | P _L | - | (742.5) | 1040 | mW | (1) |
| Frame Frequency | F _V | - | 60 | - | Hz | - |
| Dot Clock | DCLK | - | 25.175 | - | MHz | - |

Note (1) The specified power consumption is under the conditions at V_{CC}=3.3V, F_V=60Hz, whereas a power dissipation check pattern below is displayed.

Black Pattern / 0 Gray



Active Area

8.2 Backlight Unit

(Ta=25±2°C)

| Item | Symbol | Value | | | Unit | Note |
|---------------------------|-----------------|-------|--------|------|------|-----------------------|
| | | Min. | Typ. | Max. | | |
| Current of Backlight Unit | I _B | - | 200 | - | mA | - |
| Voltage of Backlight Unit | V _B | - | 9.9 | - | V | I _B =200mA |
| Power Consumption | P _{BL} | - | (1.98) | - | W | I _B =200mA |
| LED Life Time(25°C) | - | 40000 | 50000 | - | hr | - |




8.3 Transparent Touch panel

Electrical characteristics

| Item | | Value | | | Unit | Note |
|-----------------------|-------------|------------------|------|------|----------|--------------|
| | | Min. | Typ. | Max. | | |
| Operating Voltage | | - | 5 | 7 | V | - |
| Terminal Resistance | X-direction | 290 | - | 880 | Ω | At connector |
| | Y-direction | 260 | - | 530 | Ω | At connector |
| Insulation Resistance | | $\geq 20M\Omega$ | | | | At DC25V |
| Linearity | | $\leq 1.5\%$ | | | | (1) |
| Chatting | | ≤ 10 ms | | | | At connector |

Note 1: Measurement condition of Linearity

Linearity Definition

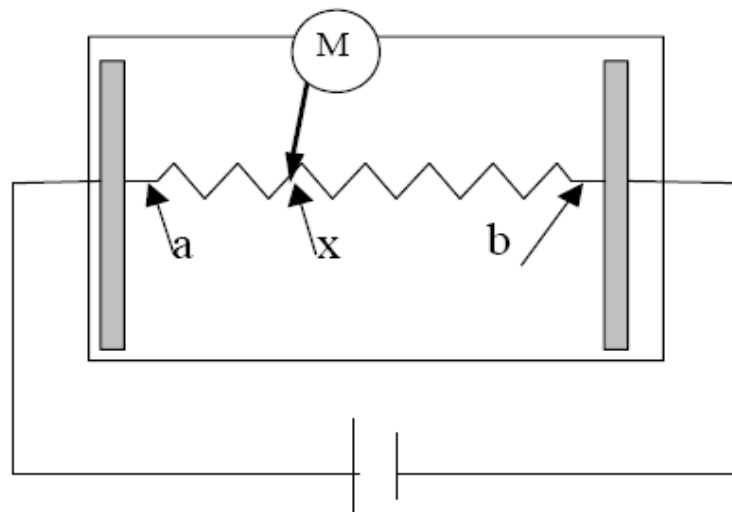


V_a : maximum voltage in the active area of touch panel

V_b: minimum voltage in the active area of touch panel

X : random measuring point

V_{xm}: Actual voltage of L_x point

V_{xi} : Theoretical voltage of L_x point

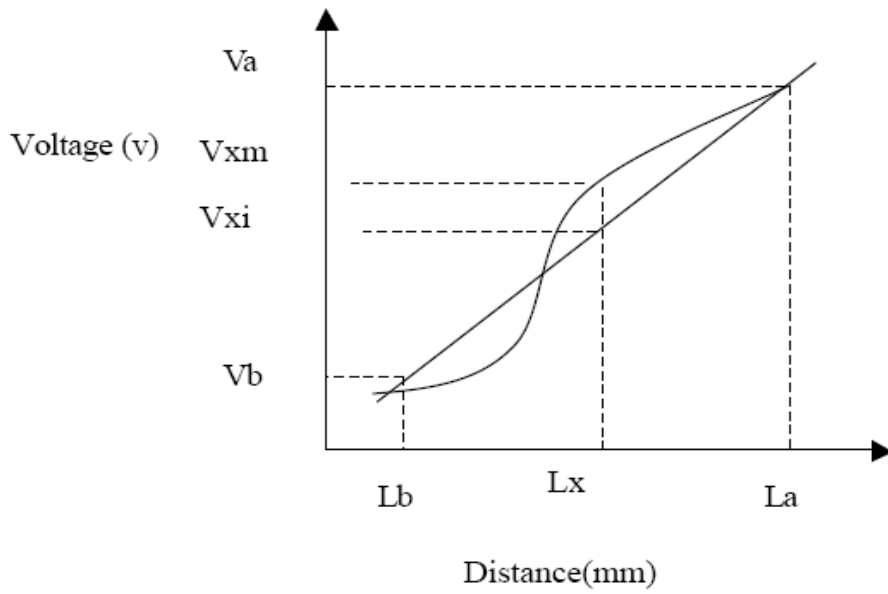


$$\text{Linearity} : [| V_{xi} - V_{xm} | / (V_a - V_b)] * 100\%$$



9. Block Diagram

9.1 TFT-LCD Module with Backlight Unit

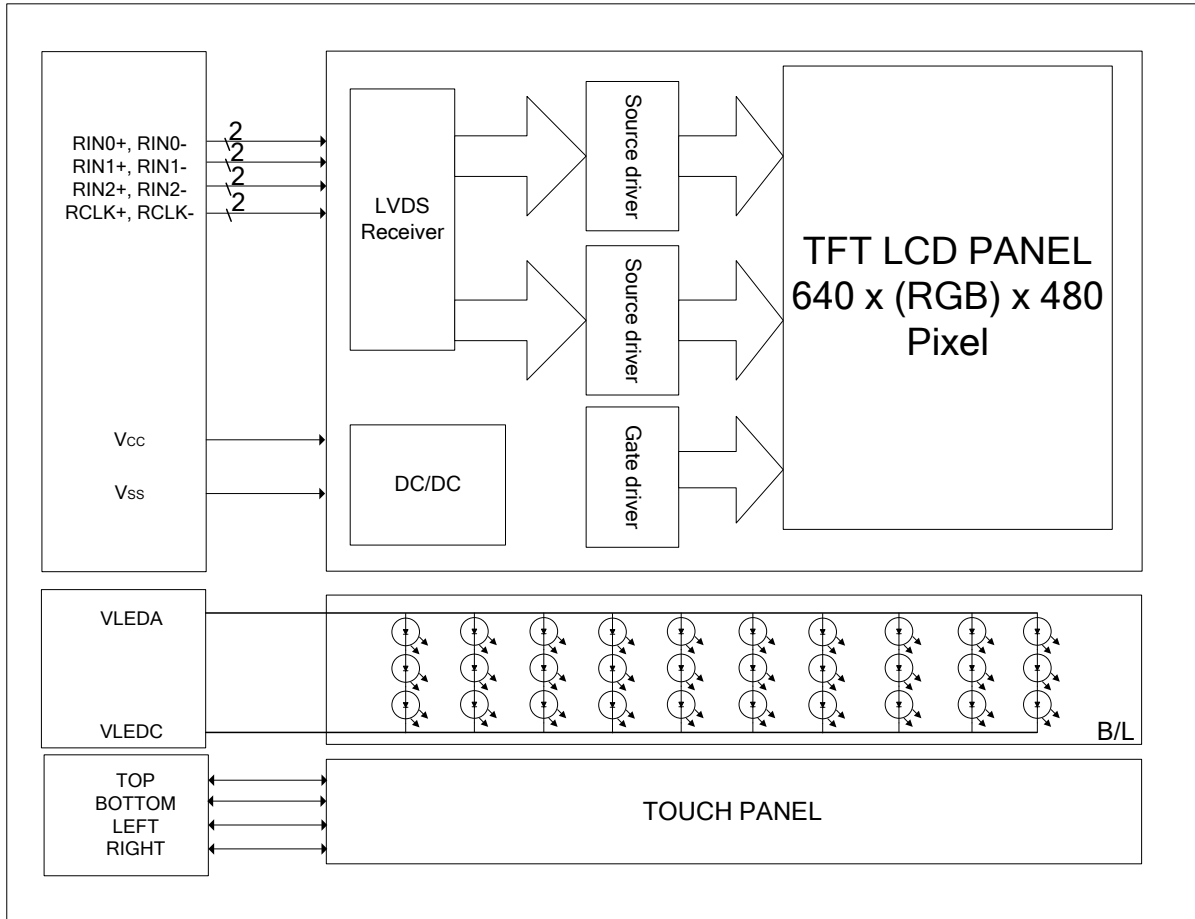



10. Input / Output Terminals Pin Assignment


10.1 TFT-LCD Module

Connector: HIROSE DF19G-20P-1H

| Pin No. | Symbol | I/O | Description |
|---------|--------|-----|---|
| 1 | Vcc | I | +3.3V power supply |
| 2 | Vcc | I | +3.3V power supply |
| 3 | Vss | I | Ground |
| 4 | Vss | I | Ground |
| 5 | RIN0- | I | Negative LVDS differential data input |
| 6 | RIN0+ | I | Positive LVDS differential data input |
| 7 | Vss | I | Ground |
| 8 | RIN1- | I | Negative LVDS differential data input |
| 9 | RIN1+ | I | Positive LVDS differential data input |
| 10 | Vss | I | Ground |
| 11 | RIN2- | I | Negative LVDS differential data input |
| 12 | RIN2+ | I | Positive LVDS differential data input |
| 13 | Vss | I | Ground |
| 14 | RCLK- | I | Negative LVDS differential clock input |
| 15 | RCLK+ | I | Positive LVDS differential clock input |
| 16 | Vss | I | Ground |
| 17 | NC | I | Not connection |
| 18 | NC | I | Not connection |
| 19 | REV | I | Selection signal for horizontal/ vertical scanning direction. Note (1) |
| 20 | Vss | I | Ground |



Note (1)

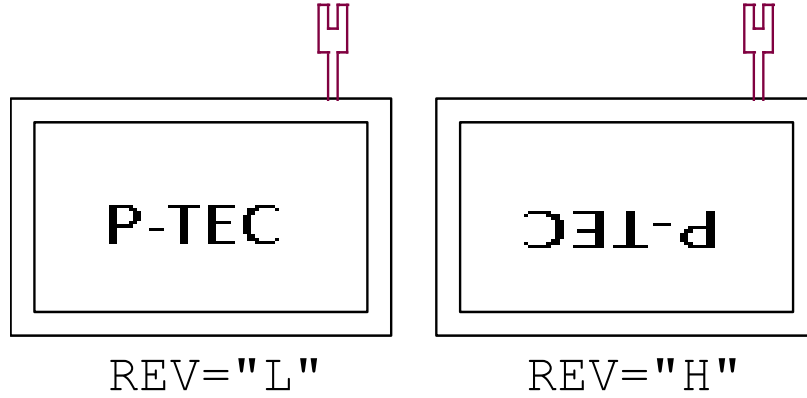

10.2 Backlight Unit

Connector: JST BHSR-02VS-1(N)

| Pin No. | Symbol | I/O | Description | Wire Color |
|---------|--------|-----|------------------------|------------|
| 1 | VLEDA | I | Backlight LED Anode. | Red |
| 2 | VLEDC | I | Backlight LED Cathode. | Black |

10.3 Transparent Touch Panel

Connector: CVILUX CF25041D0R0-10

| Pin No. | Symbol |
|---------|--------|
| 1 | TOP |
| 2 | RIGHT |
| 3 | BOTTOM |
| 4 | LEFT |



10.3 Color Data Input Assignment

The brightness of each primary color(red, green and blue) is based on the 6 bit gray scale data input for the color. The higher the binary input, the brighter the color. The table provides the assignment of color versus data input.

| Color | | Data Signal | | | | | | | | | | | | | | | | | |
|---------------------|-----------------|-------------|-----|-----|-----|-----|-----|-------|-----|-----|-----|-----|-----|------|-----|-----|-----|-----|-----|
| | | Red | | | | | | Green | | | | | | Blue | | | | | |
| | | D05 | D04 | D03 | D02 | D01 | D00 | D15 | D14 | D13 | D12 | D11 | D10 | D25 | D24 | D23 | D22 | D21 | D20 |
| Basic Colors | Black | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Cyan | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Magenta | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 |
| | Yellow | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | White | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Gray Scale Of RED | Red(0) / Dark | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(1) | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(2) | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Red(61) | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Red(62) | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Red(63) | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Gray Scale Of Green | Green(0) / Dark | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(1) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(2) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Green(61) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Green(62) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Green(63) | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Gray Scale Of Blue | Blue(0) / Dark | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | Blue(1) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | Blue(2) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : |
| | Blue(61) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 0 | 1 |
| | Blue(62) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 0 |
| Blue(63) | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | |

**11. Interface Timing****11.1 Input Signal Characteristics**

| PARAMETER | Symbol | Min. | Typ. | Max. | Unit |
|--|-------------|------|------|------|-----------|
| HS setup time | T_{hst} | 10 | - | - | ns |
| HS hold time | T_{hhd} | 10 | - | - | ns |
| VS setup time | T_{vst} | 10 | - | - | ns |
| VS hold time | T_{vhd} | 10 | - | - | ns |
| Data setup time | T_{dsu} | 10 | - | - | ns |
| Data hold time | T_{dhd} | 10 | - | - | ns |
| DEN setup time | T_{esu} | 10 | - | - | ns |
| VS falling to HS falling time on odd field @ RGB mode | T_{HV_O} | -4 | 0 | +4 | T_{CPH} |
| VS falling to HS falling time on even field @ RGB mode | T_{HV_E} | 0.4 | 0.5 | 0.6 | T_H |

| PARAMETER | Symbol | Min. | Typ. | Max. | Unit |
|-----------------|-----------|------|--------|------|-----------|
| CLK frequency | F_{CPH} | - | 25.175 | - | MHz |
| CLK period | T_{CPH} | - | 39.7 | - | ns |
| CLK pulse duty | T_{CWH} | 40 | 50 | 60 | % |
| HS period | T_H | - | 800 | - | T_{CPH} |
| HS pulse width | T_{WH} | 5 | 30 | - | T_{CPH} |
| HS-DEN time | T_{HS} | 112 | 144 | 175 | T_{CPH} |
| DEN pulse width | T_{EP} | - | 640 | - | T_{CPH} |
| VS pulse width | T_{WV} | 1 | 3 | 5 | T_H |
| VS-DEN time | T_{STV} | - | 35 | - | T_H |
| VS period | T_V | - | 525 | - | T_H |

Note: When SYNC mode is used, 1st data start from 144th CLK after HS falling (when $STHD[5:0]=00000$)


**11.2 LVDS Switching Characteristics**

| Symbol | Parameter | Min. | Typ. | Max. | Units | |
|-------------------|------------------------------------|------------------|-------|----------|-------|----|
| t _{RCP} | CLK OUT Period | VCC = 3.0 - 3.6V | 11.76 | T | 50.0 | ns |
| | | VCC = 2.5 - 3.6V | 14.28 | T | 50.0 | ns |
| t _{RCH} | CLK OUT High Time | | 4T/7 | | ns | |
| t _{RCL} | CLK OUT Low Time | | 3T/7 | | ns | |
| t _{RCD} | RCLK +/- to CLK OUT Delay | | 5T/7 | | ns | |
| t _{RS} | TTL Data Setup to CLK OUT | 0.35T-0.3 | | | ns | |
| t _{RH} | TTL Data Hold from CLK OUT | 0.45T-1.6 | | | ns | |
| t _{TLH} | TTL Low to High Transition Time | | 2.0 | 3.0 | ns | |
| t _{THL} | TTL High to Low Transition Time | | 1.8 | 3.0 | ns | |
| t _{RIP1} | Input Data Position0 (T = 11.76ns) | -0.4 | 0.0 | 0.4 | ns | |
| t _{RIP0} | Input Data Position1 (T = 11.76ns) | T/7-0.4 | T/7 | T/7+0.4 | ns | |
| t _{RIP6} | Input Data Position2 (T = 11.76ns) | 2T/7-0.4 | 2T/7 | 2T/7+0.4 | ns | |
| t _{RIP5} | Input Data Position3 (T = 11.76ns) | 3T/7-0.4 | 3T/7 | 3T/7+0.4 | ns | |
| t _{RIP4} | Input Data Position4 (T = 11.76ns) | 4T/7-0.4 | 4T/7 | 4T/7+0.4 | ns | |
| t _{RIP3} | Input Data Position5 (T = 11.76ns) | 5T/7-0.4 | 5T/7 | 5T/7+0.4 | ns | |
| t _{RIP2} | Input Data Position6 (T = 11.76ns) | 6T/7-0.4 | 6T/7 | 6T/7+0.4 | ns | |
| t _{RPLL} | Phase Lock Loop Set | | | 10.0 | ms | |




11.2 Waveform


11.2.1 Clock and Data input waveforms

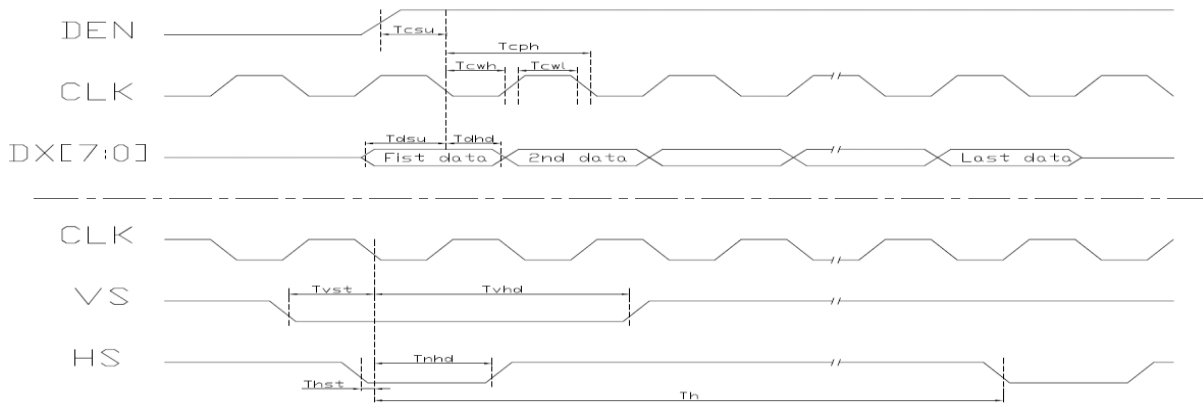

11.2.2 Data input format for RGB Mode

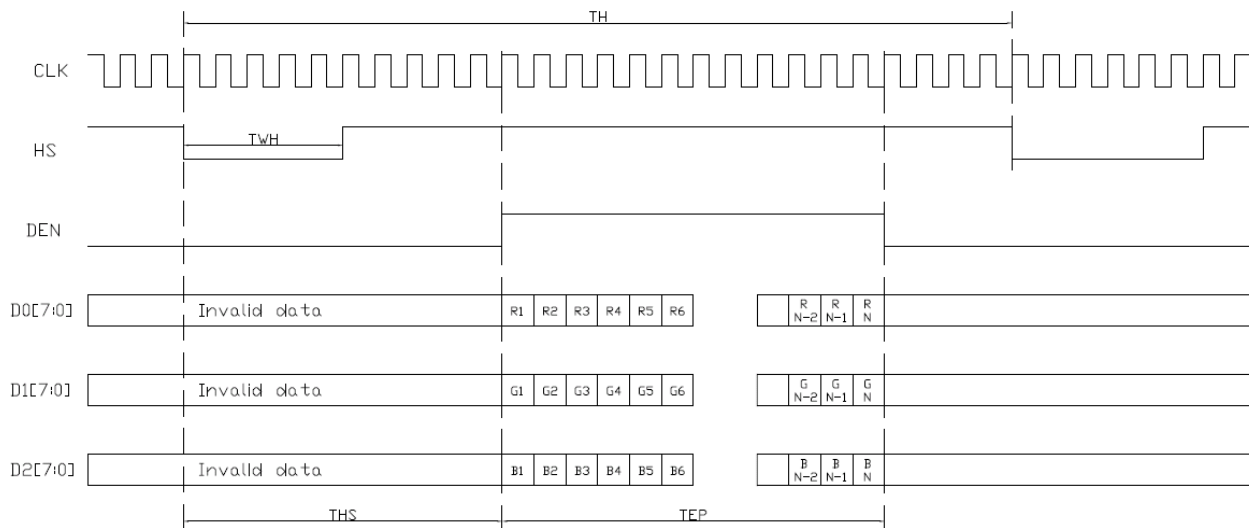


11.2.3 The HS & VS timing of the ODD/EVEN field.

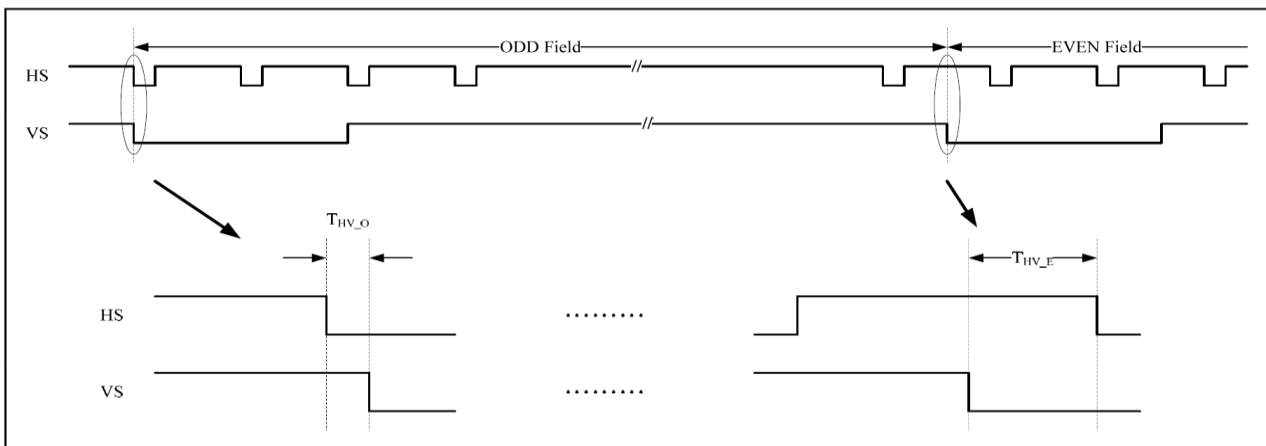



11.2.4 LVDS AC Timing

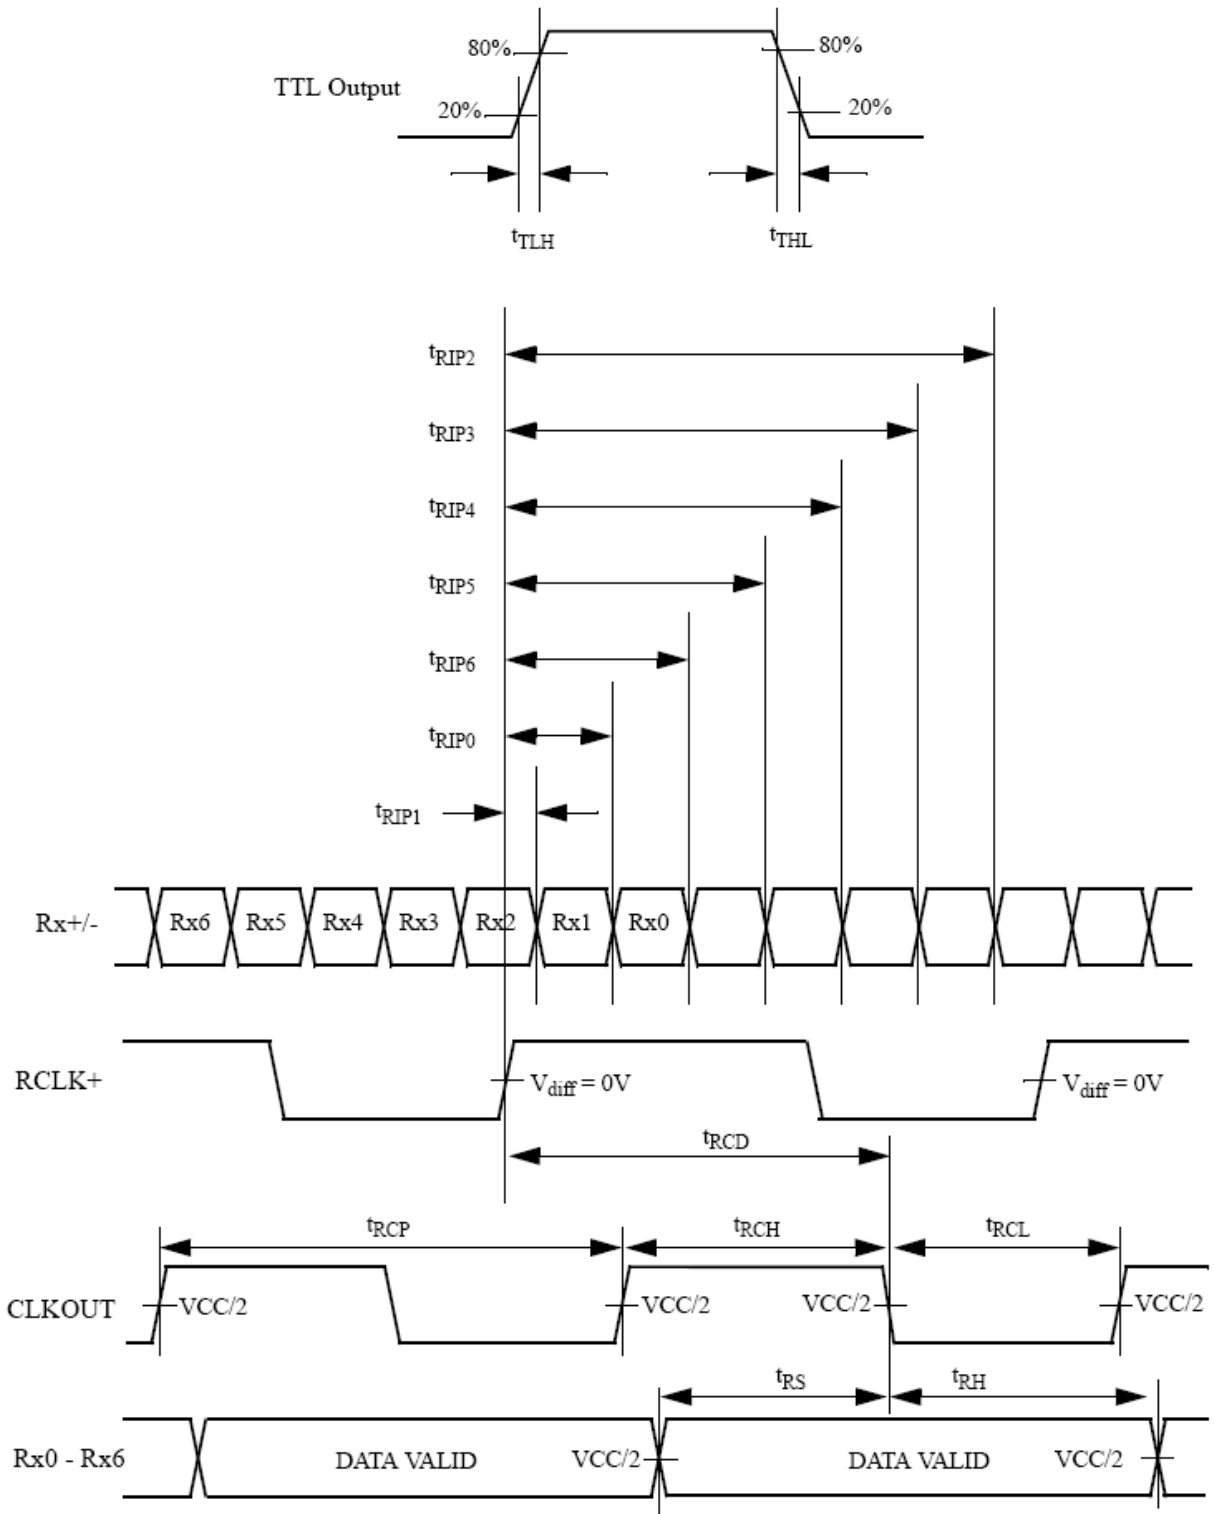

Note:
 1) $V_{diff} = (RA+) - (RA-), \dots, (RCLK+) - (RCLK-)$




12. Optical Characteristics

The optical characteristics should be measured in a dark environment (≤ 1 lux) or equivalent state with the methods shown in Note (4).

| Item | | Symbol | Conditions | Min. | Typ. | Max. | Unit | Note |
|-----------------------|------------|---------------|---|-------|-------|-------|-------------------|---------|
| Contrast Ratio | | CR | $\theta_x=0^\circ, \theta_y=0^\circ$ Viewing Normal Angle | 200 | (350) | - | - | (2) |
| Response Time | | T_R | | - | 15 | - | ms | (3) |
| | | T_F | | - | 35 | - | ms | |
| Luminance(Center) | | Y | | 480 | (560) | - | cd/m ² | (4) |
| Brightness uniformity | | BUNI | | 80 | (85) | - | % | (5) |
| Color Chromaticity | Red | Rx | | 0.550 | 0.600 | 0.650 | - | (1),(4) |
| | | Ry | | 0.300 | 0.350 | 0.400 | - | |
| | Green | Gx | | 0.270 | 0.320 | 0.370 | - | |
| | | Gy | | 0.500 | 0.550 | 0.600 | - | |
| | Blue | Bx | | 0.090 | 0.140 | 0.190 | - | |
| | | By | 0.100 | 0.150 | 0.200 | - | | |
| | White | Wx | 0.280 | 0.320 | 0.380 | - | | |
| | | Wy | 0.330 | 0.380 | 0.430 | - | | |
| Viewing Angle | Horizontal | θ_{x+} | CR \geq 10 | 55 | 65 | - | deg. | |
| | | θ_{x-} | | 55 | 65 | - | | |
| | Vertical | θ_{y+} | | 45 | 55 | - | | |
| | | θ_{y-} | | 55 | 65 | - | | |




Note (1) Definition of Viewing Angle (θ_x, θ_y):

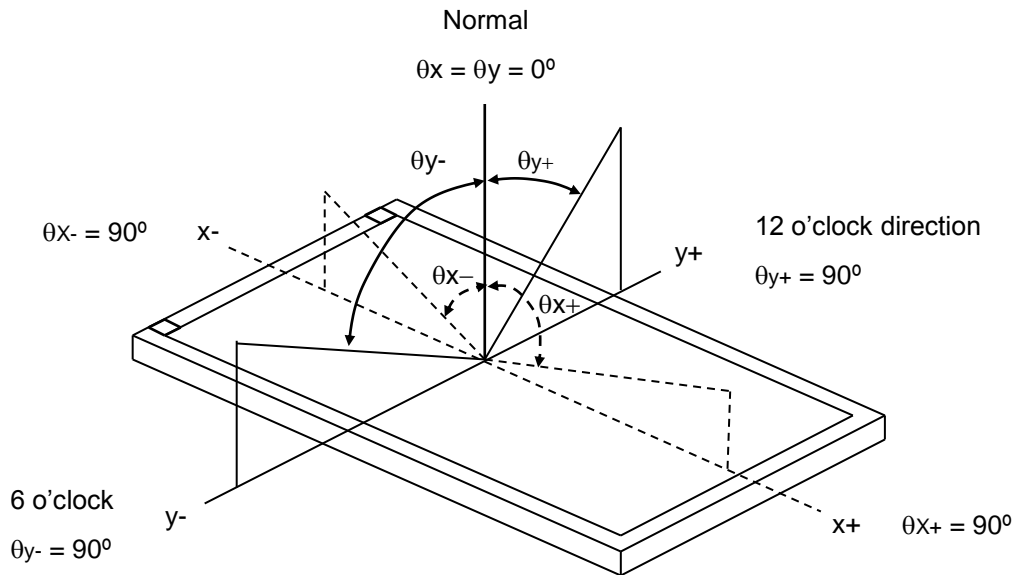

Note (2) Definition of Contrast Ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$


Note (3) Definition of Response Time (T_R, T_F):

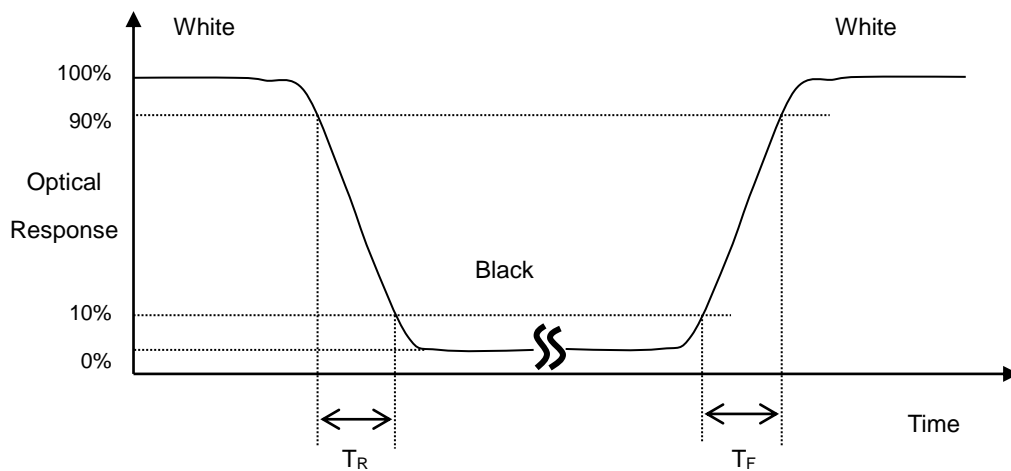




Note (4) Measurement Set-Up:

The LCD module should be stabilized at a given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a windless room.

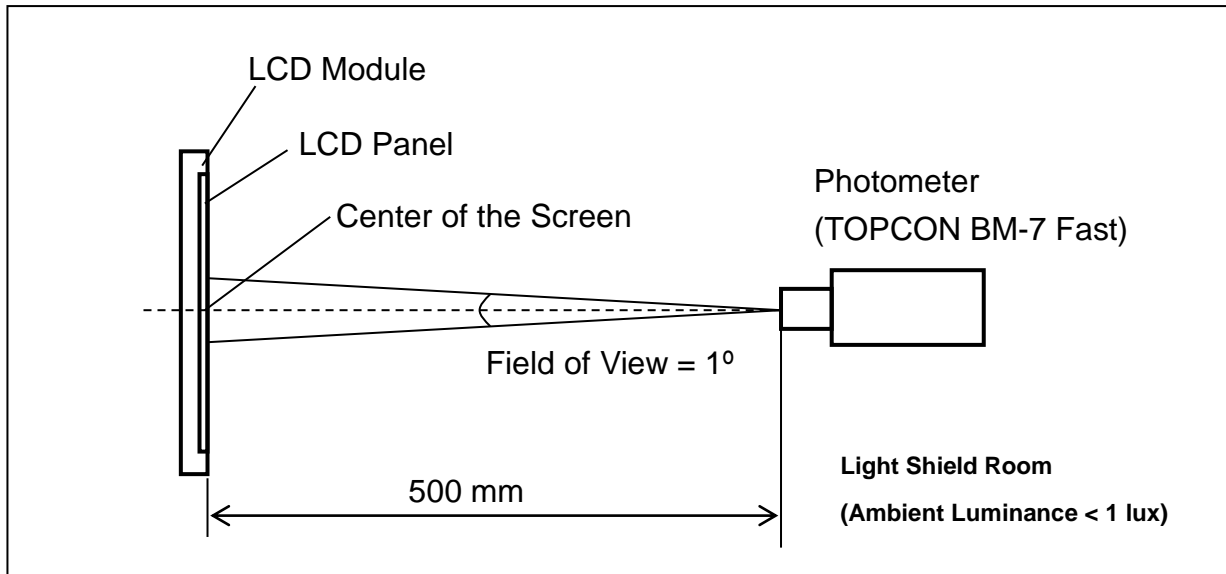

Note (5) Definition of brightness uniformity

Brightness uniformity=(Min Luminance of 9 points)/(Max Luminance of 9 points)×100%

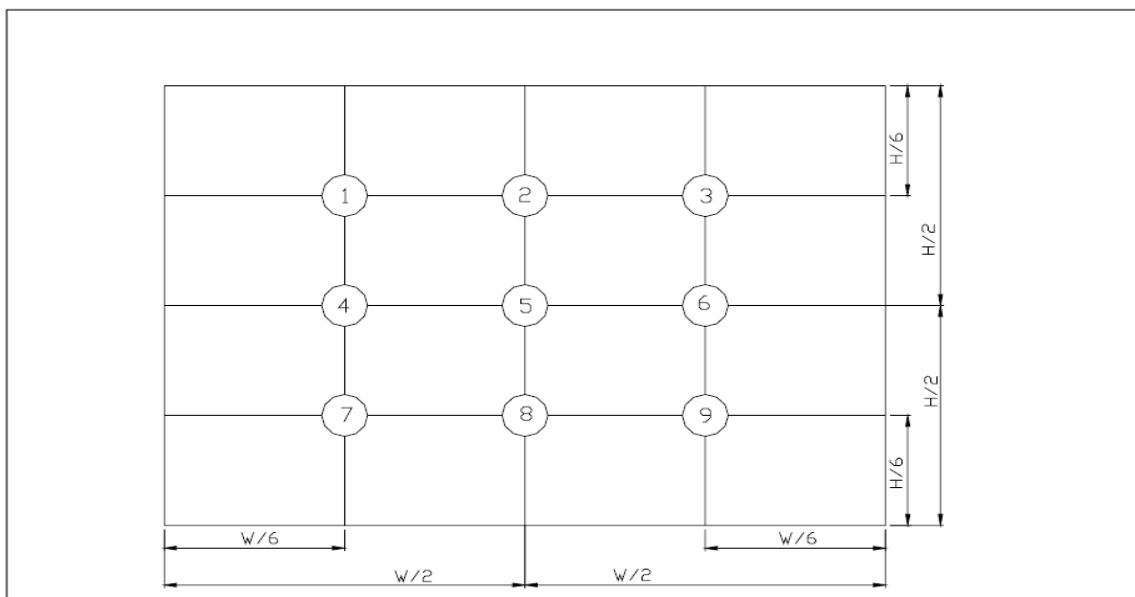

(單位 : mm)


**13. Reliability Test**

| No. | Test Items | Test Condition | Remark |
|-----|---|---|--------|
| 1 | High Temperature Storage Test | T _a = 80°C 240 hours | - |
| 2 | Low Temperature Storage Test | T _a = -30°C 240 hours | - |
| 3 | High Temperature Operation Test | T _a = 70°C 240 hours | - |
| 4 | Low Temperature Operation Test | T _a = -20°C 240 hours | - |
| 5 | High Temperature and High Humidity Operation Test | T _a =60°C 90%RH 240 hours | - |
| 6 | Electro Static Discharge Test (non-operating) | -Panel Surface/Top Case : 150pF, 330Ω Air: ±15kV, Contact: ±8kV | - |
| 7 | Mechanical Shock Test (non-operating) | Half sine wave, 100G, 6ms 3 times shock of each six surfaces | - |
| 8 | Vibration Test (non-operating) | Sine wave, 10 ~ 55 ~ 10Hz, 3 axis, 2 hours/axis | - |
| 9 | Thermal Shock Test (non-operating) | -20°C(30min) ~ 70°C(30min), 100 cycles | - |
| 10 | Drop Test(with Carton) | Height: 80cm 1 corner, 3 edges, 6 surfaces | - |



14. Packaging

Packing Method

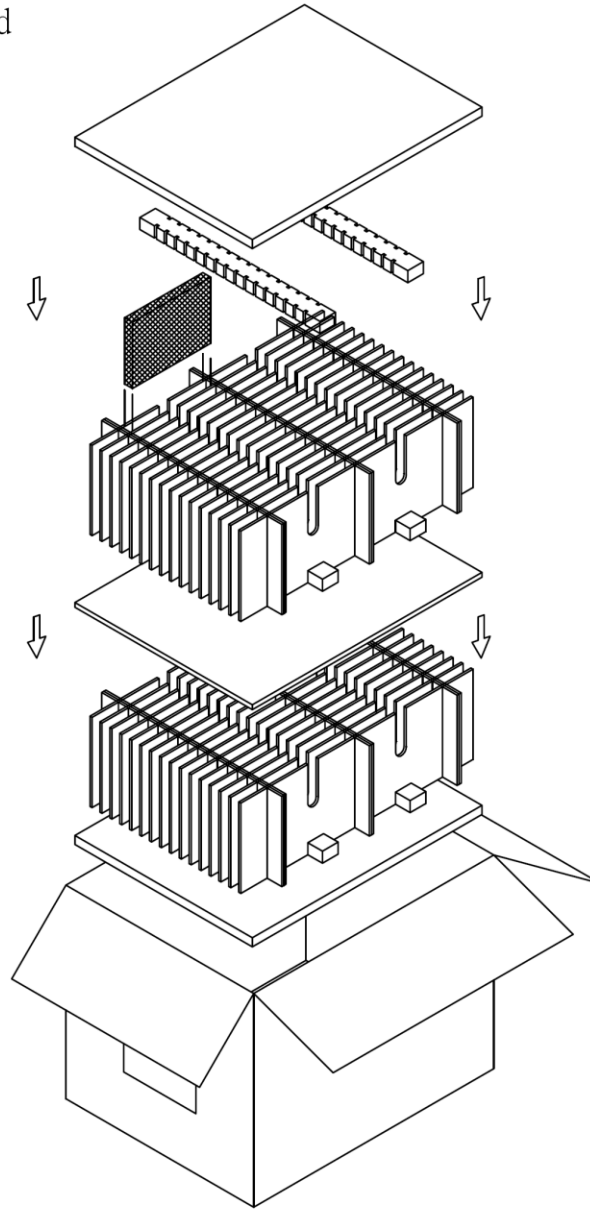

| PARTS LIST | | | | | |
|------------|----------------------|---------------------|----------|-------|------|
| | ITEM | SIZE(LxWxH) unit:mm | MATERIAL | Q.T.Y | NOTE |
| 1 | STATIC SHIEDING BAGS | 200.0x145.0*0.09 | | 60 | |
| 2 | PU FOAM | 440.0x340.0x15.0 | SPONGE | 2 | |
| 3 | EPE PAD | 345.0x30.0x20.0 | | 8 | |
| 4 | CARD BOARD | 345.0x150.0x3.5 | CARTON | 12 | |
| 5 | CARD BOARD | 450.0x150.0x3.5 | CARTON | 32 | |
| 6 | CARD BOARD | 440.0x340.0x8.0 | CARTON | 1 | |
| 7 | EXTERNAL BOX | 460.0x360.0x355.0 | CARTON | 1 | |
| 8 | PRODUCT | 144.0x104.6x14.5 | | 60 | |



15. Precautions

15.1 Assembly and Handling Precautions

- (1) Do not apply rough force such as bending or twisting to the module during assembly.
- (2) It's recommended to assemble or to install a module into the user's system in clean working areas. The dust and oil may cause electrical short or worsen the polarizer.
- (3) Don't apply pressure or impulse to the module to prevent the damage of LCD panel and Backlight.
- (4) Always follow the correct power-on sequence when the LCD module is turned on. This can prevent the damage and latch-up of the CMOS LSI chips.
- (5) Do not plug in or pull out the I/F connector while the module is in operation.
- (6) Do not disassemble the module.
- (7) Use a soft dry cloth without chemicals for cleaning, because the surface of polarizer is very soft and easily scratched.
- (8) Moisture can easily penetrate into LCD module and may cause the damage during operation.
- (9) High temperature or humidity may deteriorate the performance of LCD module. Please store LCD module in the specified storage conditions.
- (10) When ambient temperature is lower than 10°C, the display quality might be reduced. For example, the response time will become slow.

15.2 Safety Precautions

- (1) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- (2) After the module's end of life, it is not harmful in case of normal operation and storage.




15.3 Cautions for installing and assembling

Bezel edge must be positioned in the area between the Active area and View area.


The bezel may press the touch screen and cause activation if the edge touches the active area. A gap of approximately 0.5mm is needed between the bezel and the top electrode.

It may cause unexpected activation if the gap is too narrow. There is a tolerance of 0.2 to 0.3mm for the outside dimensions of the touch panel and tail. A gap must be made to absorb the tolerance in the case and connector.

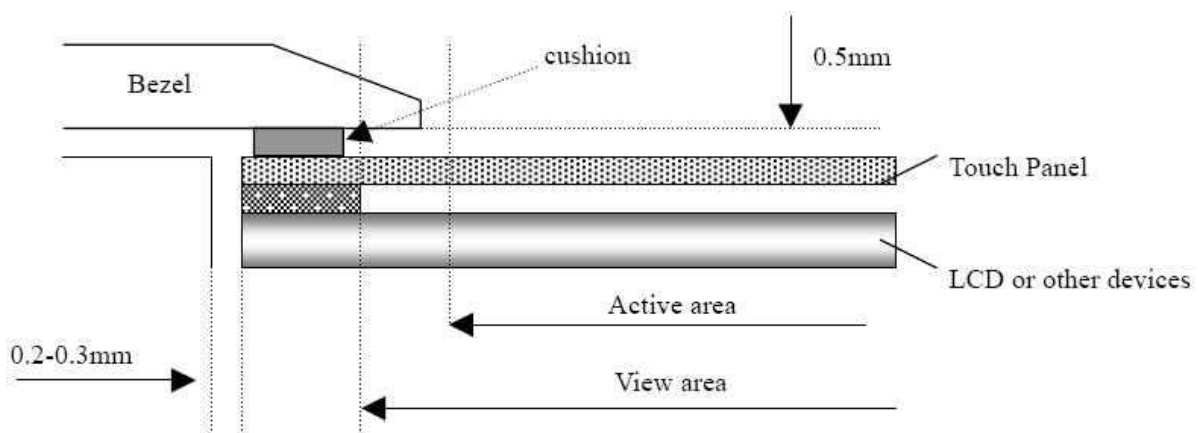

15.4 Operation Prohibit

Not Suggested Pen Input Position On Touch Panel

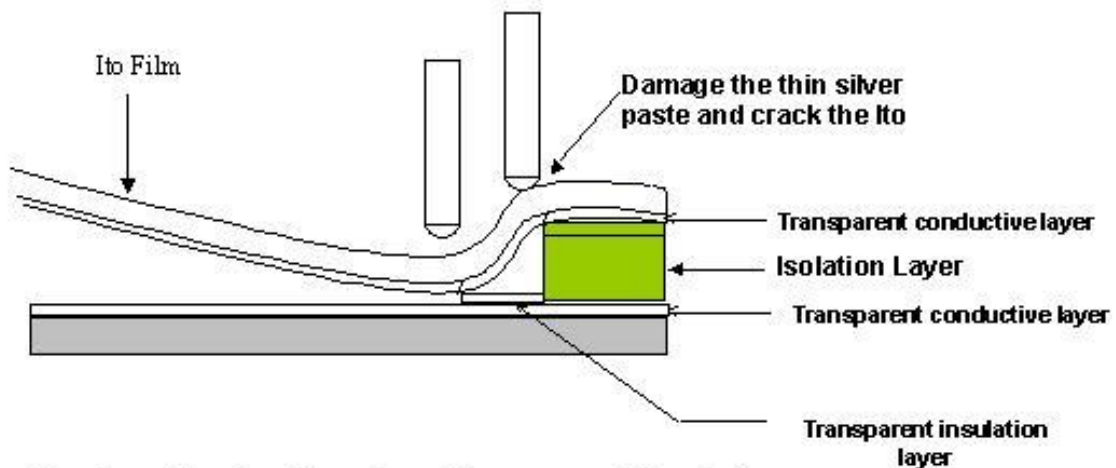

Pen input load on the edge of transparent insulation area might damage the ITO of ITO Pet- Film and reduce the durability of touch panel



P-TEC

MODEL NO.


PT644857B-TLMWD-EMR04

SPEC SAMPLE

PAGE

25


16.Outline Drawing

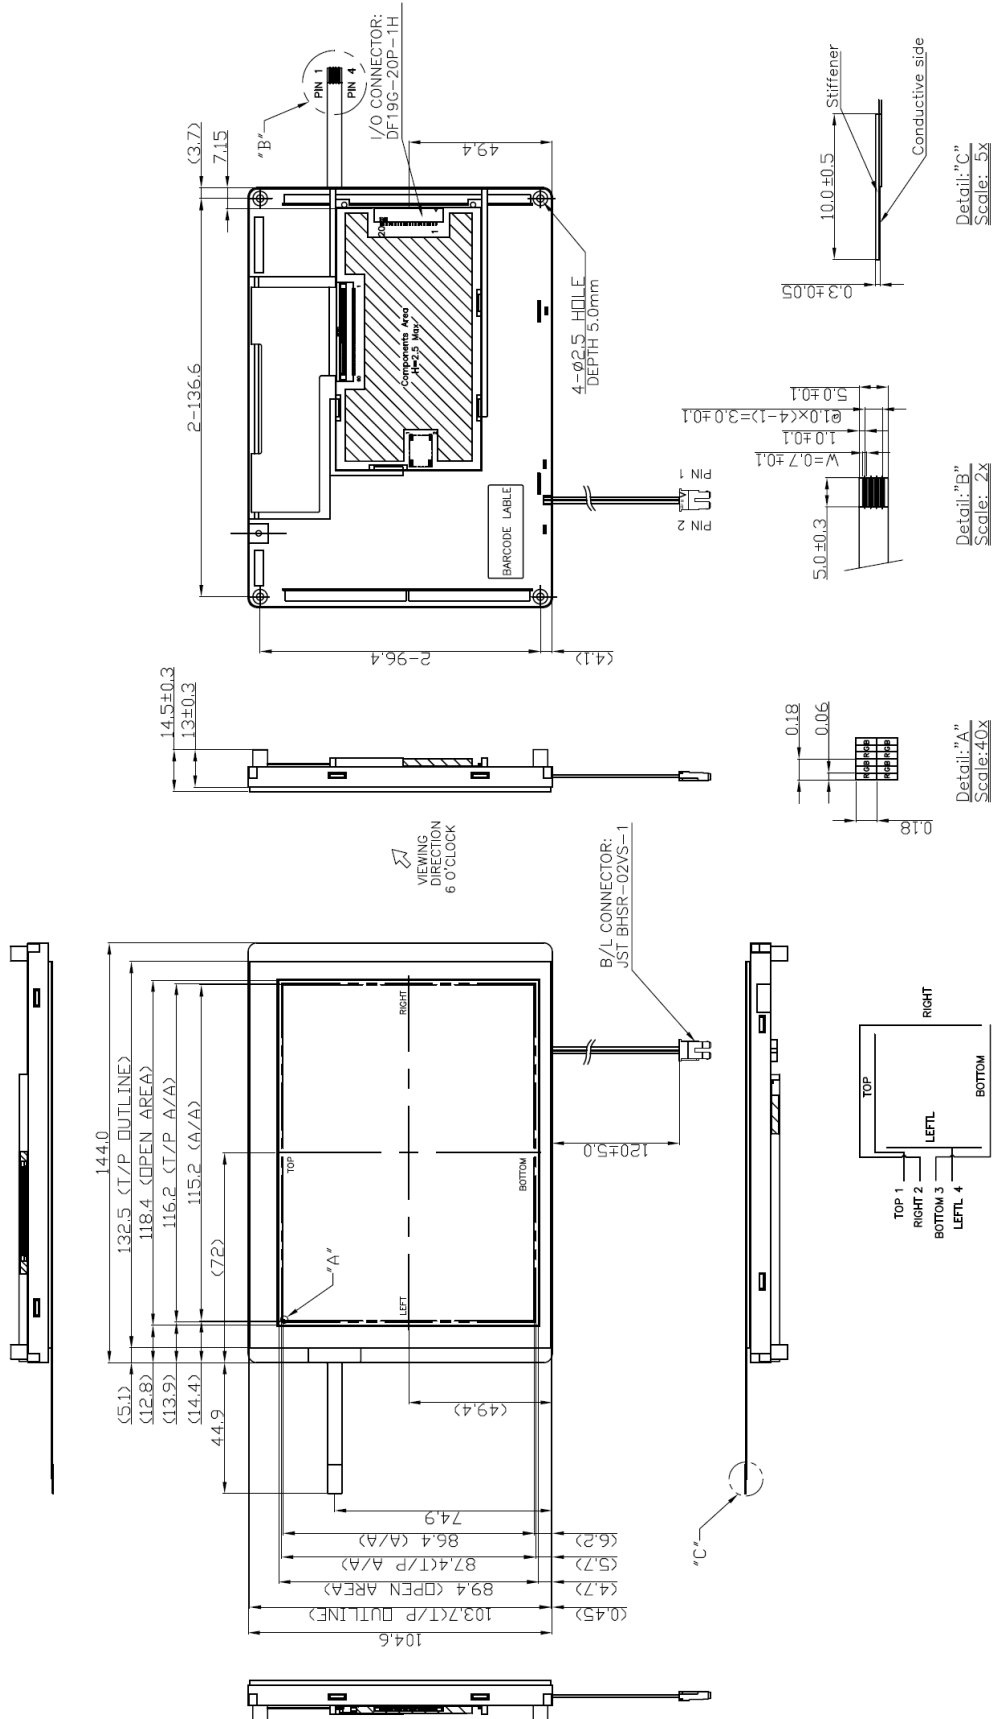




17. Definition of Labels

The bar code nameplate is pasted on each module as illustration, and its definitions are as following explanation.

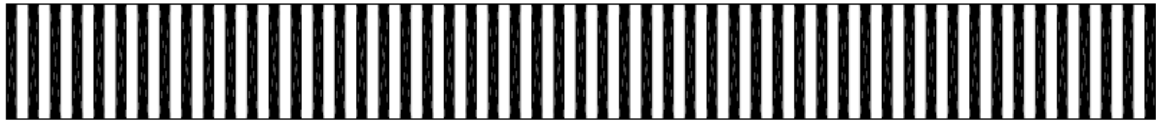

PT644857B-TLMWD-EMR04

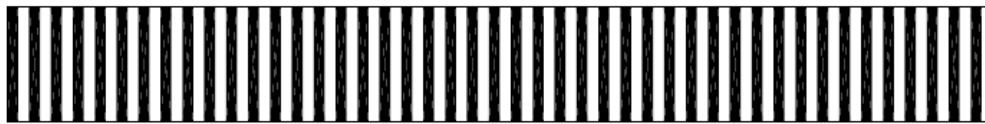


ABCDEFGHIJKLM

(a) Module Name: PT644857B-TLMWD-EMR04

(b) Serial ID:

A B C D E F G H I J K L M

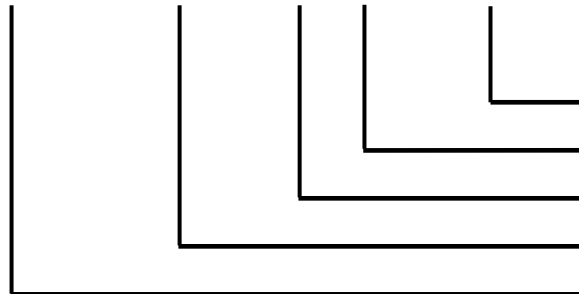

Serial No.
Revision Code
Factory Code
Manufactured Date
Screen Size

Serial ID includes the information as below:

(a) Screen size (Diagonal): Inch Code (ABCD)

3.5" → 0350

10.4" → 1040

(b) Manufactured Date: Year, Month, Day (EFG)

Year (E)

| | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|
| Year | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
| Mark | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| Year | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 | 2016 | 2017 | 2018 | 2019 |
| Mark | A | B | C | D | E | F | G | H | I | J |



Month (F)

| | | | | | | | | | | | | |
|-------|------|------|------|------|-----|------|------|------|------|------|------|------|
| Month | Jan. | Feb. | Mar. | Apr. | May | Jun. | Jul. | Aug. | Sep. | Oct. | Nov. | Dec. |
| Mark | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C |

Day (G)

| | | | | | | | | | | | | | | | | |
|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Day | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
| Mark | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C | D | E | F | G |
| Day | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | |
| Mark | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | |

(c) Factory Code (H):

For P-TEC internal use.

(d) Revision Code (I):

Cover all the change, for example: 1: Rev.1, 2: Rev.2, 3: Rev.3...etc.

(e) Serial No. (JKLM):

Manufacturing sequence of product, for example: 0001~9999.




18. Incoming Inspection Standards

18.1 The environmental condition of inspection

The environmental condition and visual inspection shall be conducted as below.

- (1) Ambient temperature $25 \pm 5^{\circ}\text{C}$
- (2) Humidity: $60 \pm 5\%$ RH
- (3) Viewing distance is approximately 35 ~ 40 cm
- (4) Viewing angle is normal to the LCD panel as Fig_1(10°)
- (5) Ambient Illumination: 300 ~ 500 Lux for external appearance inspection

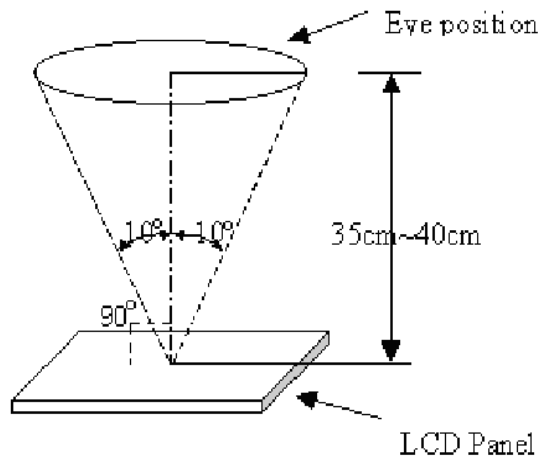

Fig_1

18.2 The defects classify of AQL as following:




| Class of defects | AQL | Definition |
|------------------|-------|--|
| Major | 0.65% | It is defect that is likely to result in failure or to reduce materially the usability of the intended function. |
| Minor | 1.5% | It is a defect that will not result in functioning problem with deviation classified. |



18.3 Inspection Parameters

| Item | | Specification/Description | | | Note | |
|--|--|--|-------------------|-------------------|------------|---------------|
| Display | Function | No Display | | | - | |
| | | Malfunction | | | - | |
| Operating | Contrast ratio | Out of Spec | | | - | |
| | Line defect | No obvious Vertical and Horizontal line defect in bright , dark and colored. | | | - | |
| | Point Defect (red,green,blue,dark, white) | Item | Acceptable number | | | Note: 1、4、5、6 |
| | | | A | B | Total | |
| | | BRIGHT DOT | $N \leq 2$ | $N \leq 2$ | $N \leq 7$ | |
| | | DARK DOT | $N \leq 3$ | $N \leq 4$ | | |
| | | TOTAL DOT | $N \leq 4$ | $N \leq 5$ | | |
| TWO ADJACENT DOT | NOT ALLOWED | | | | | |
| THREE OR MORE ADJACENT DOT | NOT ALLOWED | | | | | |
| External Inspection (non-operating) | Scratch on the polarizer | L(mm) | W(mm) | Acceptable number | Note:2 | |
| | | $L \leq 2.5$ | $W \leq 0.1$ | 4 | | |
| | | $L > 2.5$ | $W > 0.1$ | 0 | | |
| | Dent or bubble on the polarizer | Dimension(mm) | | Acceptable number | | Note:3 |
| | | $D \leq 0.5$ | | 4 | | |
| | | $D \leq 0.15$ | | Disregard | | |
| | Foreign material on the polarizer | Dimension(mm) | | Acceptable number | | Note:3 |
| | | $D \leq 0.5$ | | 4 | | |
| | | $D \leq 0.15$ | | Disregard | | |

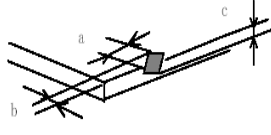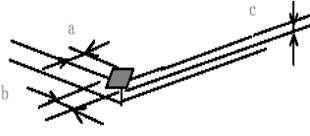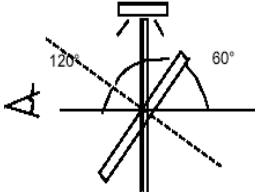


| Item | | Specification/Description | | | Note |
|----------------|---|---|---------------------|---|--------|
| Touch Panel | Scratch | L(mm) | W(mm) | Acceptable number | Note:2 |
| | | $L \leq 10$ | $W < 0.05$ | Disregard | |
| | | | $0.05 \leq W < 0.1$ | $N \leq 4$ | |
| | $W \geq 0.1$ | | 0 | | |
| | Foreign Materials (Linear shape) | $L \leq 10$ | $W < 0.05$ | Disregard | Note:2 |
| | | | $0.05 \leq W < 0.1$ | $N \leq 3$ | |
| | | | $W \geq 0.1$ | 0 | |
| | Foreign Materials (Circular shape) | Dimension(mm) | | Acceptable number | Note:3 |
| | | $D \leq 0.25$ | | Disregard | |
| | | $0.25 < D \leq 0.5$ | | $N \leq 6$ | |
| Glass chipping |  | | | $a \leq 5\text{mm}$ $b \leq 3\text{mm}$ $c \leq t$ (t: Glass think) | Note:7 |
| |  | | | $a \leq 3\text{mm}$ $b \leq 3\text{mm}$ $c \leq t$ (t: Glass think) | Note:7 |
| Newton-ring | (In case of doubtful situations) Observe on 60° from the product surface under a while Fluorescent lamp(3-wavelength lamp). |  | | Average diameter $\leq 1/3$ Touch Panel area Disregard. | Note:7 |




Note1. The definition of dot defect : The dot defect was judged after repair and the size of a defective dot over 1/2 of whole dot is regarded as one defective dot.


Note2.



Note3. D : Diameter $D=(a+b)/2$



Note4. Bright dot is defined through 6% transmission ND Filter as following.

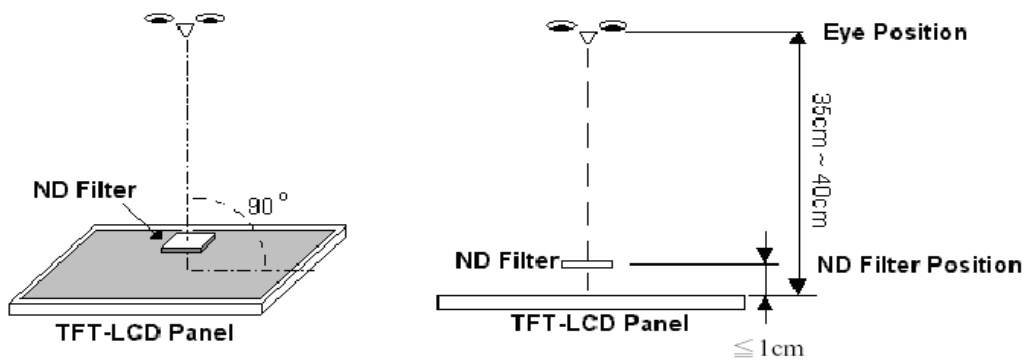


Note5. ADJACENT DOT






Note6.

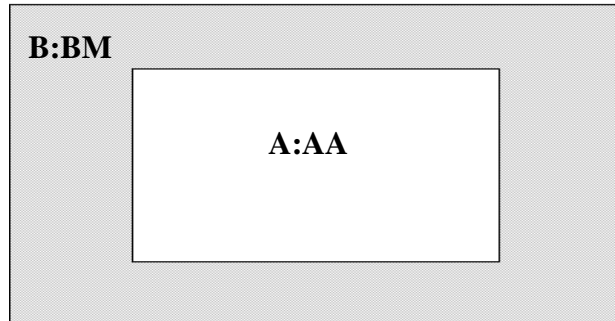

Note7.

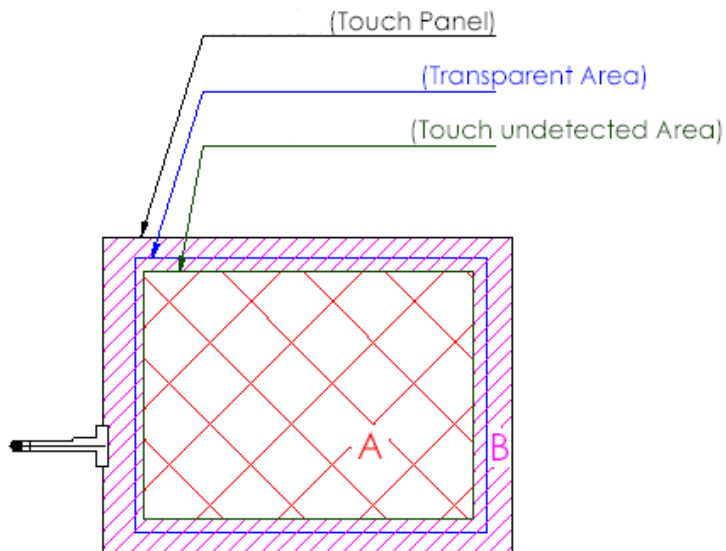

A area : Without any defect point effect on normal operation.

B area : None-specify



18.4 Handling of LCM

- (1) Don't give external shock.
- (2) Don't apply excessive force on the surface.
- (3) Liquid in LCD is hazardous substance. Must not lick and swallow. when the liquid is attach to your hand, skin, cloth etc. Wash it out thoroughly and immediately.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't disassemble the LCM.