- 5.08mm pitch
- Flame Retardant Material
- 2.5mm2 wire acceptance
- UL/ CSA approved
- Interlocking
- Professional rising clamp

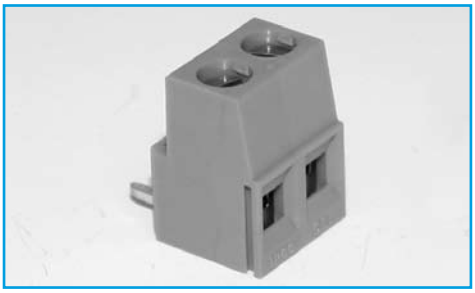

SPECIFICATION

Rating:	20A/250V
Dielectric Strength:	≥2.5KV/60sec
Insulation Resistance:	≥5MΩ
Working temperature:	-20°C to 125°C
Short Period:	160°
Moulding:	UL94V-0 flame retardant PA66
Pin/terminal:	5µ tinned, nickel plated brass
Wire protector:	Nickel plated brass
Screw/torque:	M3 steel, 6µ zinc colour passivated and tropicalised/0.5Nm
Recommended PCB hole size:	ø1.3mm

OUTLINE DRAWING



ORDERING INFORMATION

DBC	TB	85	/2
Dubilier Connectors	Series	Style	Nº of Ways
	Terminal Block		2 = 2 ways 3 = 3 ways

* Other Number of ways are available up to 12
Please consult office for further details