

SHEET 1 OF 1

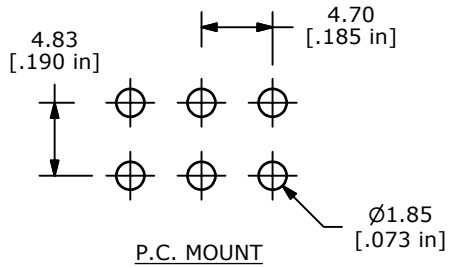


P.C. MOUNT


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	OFF	ON
2-3 5-6	OPEN	2-1 5-4




CIRCUI: DPDT

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: SILVER
5. RATING: 2 AMPS @250VAC
   5 AMPS @120VAC OR 28VDC
6. ELECTRIC LIFE: 40,000 make-and-break cycles
   at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. PACKAGE:V 108 PARTS PER TRAY
12. 2002/95/EC (ROHS) COMPLIANT

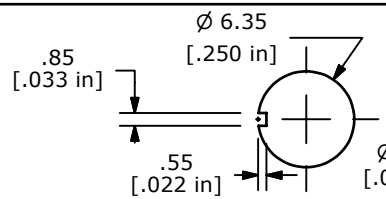


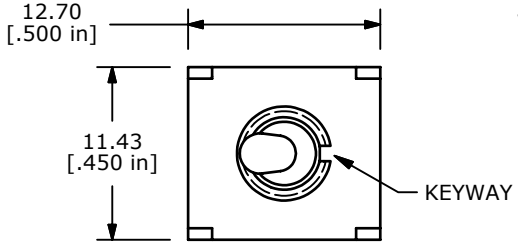


PANEL
MOUNTING

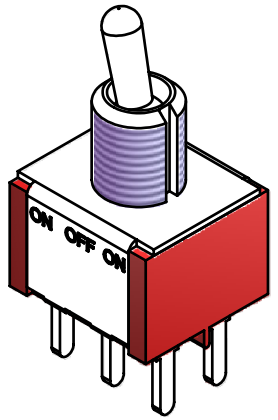

ISOMETRIC

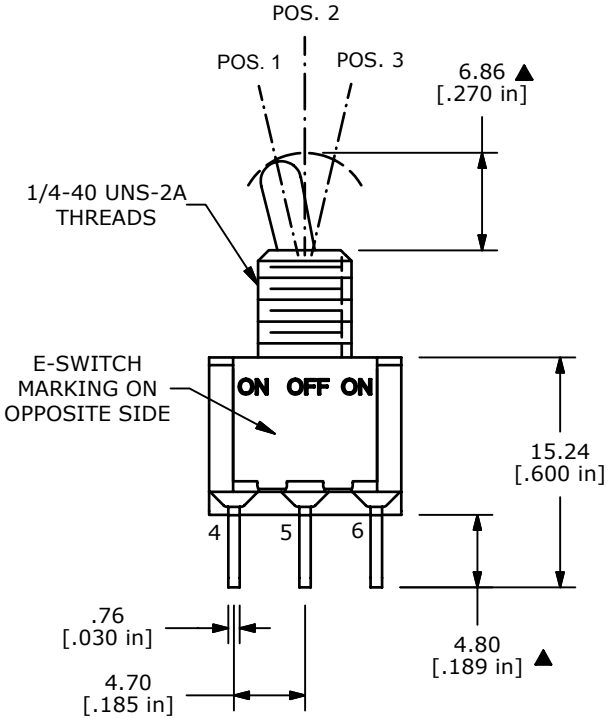

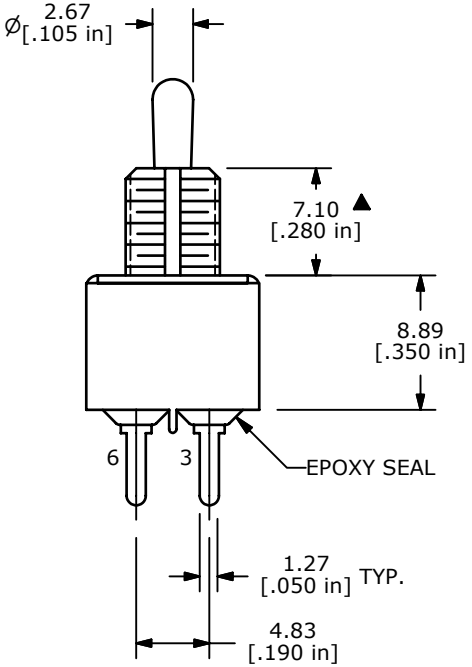

REV	PCR NO	DESCRIPTION	DATE	BY
A	17965	RELEASED FOR PRODUCTION	2/13/08	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE 100DP3T2B3M2QE

SCALE	DATE	DR	DWG	REV
2:1	2/13/2008	BLR	T123017	A