


# HSF

**NOTES:**



Rated Current:2.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+33%G.F UL94V-0 BK


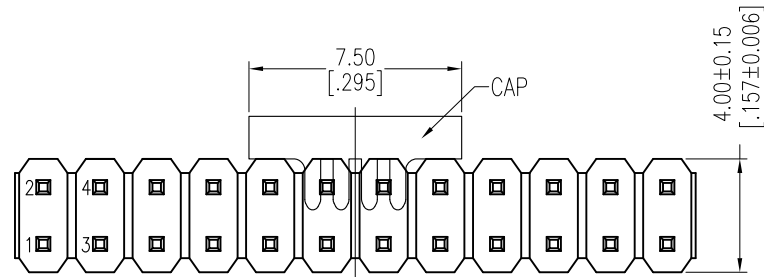


Dual Numbers

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

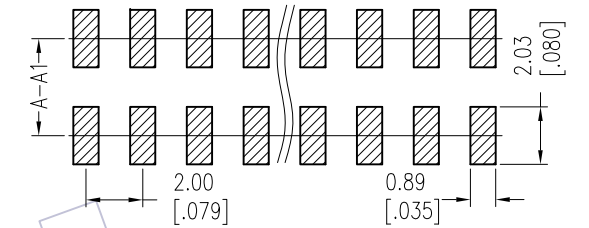

Odd Number

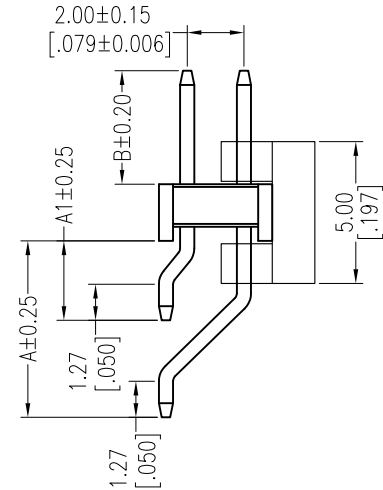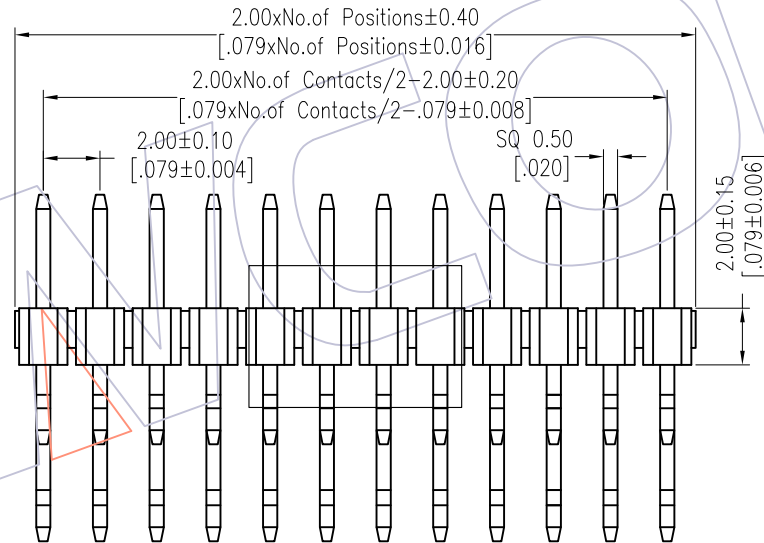

## Ordering Information

1220-12 XX XX Z XXX C R XX

No.of Pins	Contact Plating	Pin Length(Short)	Insulator Material	Packing	Series No.
Per Row:02~40	G0=Gold Flash	L=A1+B+2.2	C=PA9T	T=Tube	01~99
	G3=10u"Gold	Standard:069=6.9		P=Tube+CAP	
	G4=15u"Gold	080=8.0		R=Tape&Reel+CAP	
	G5=30u"Gold	090=9.0			
	S0=Gold Flash/Tin				
	S3=10u"Gold/Tin				
	S4=15u"Gold/Tin				
	S5=30u"Gold/Tin				
	SN=Tin				
	SM=Matte Tin				

Item	Pin Length	A1	A	B	Mating
Standard	6.90	2.80	6.22	1.90	
	8.00	2.80	6.22	3.00	
	9.00	2.80	6.22	4.00	2240 2243 2263 2272
Alternate					

OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
x.X ±0.40	Liu	2018.01.19	UNIT	mm	1220-12XXXXXXCRXX
x.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
x.XXX ±0.15	APPROVE	DATE	SHEET	1/1	PH2.00 DUAL ROW 90° SMT H=2.0
Angle ± 3'			PROJ.		Customer NO.
DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com

WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A1	2018/01/19	Modify P/N	
AO	2012/04/26	NEW	