Photocoupler

K3610 • K3611

These Photocouplers consist of a Gallium Arsenide Infrared Emitting Diode and a Silicon NPN Phototransistor in a 6-pin package.

DIMENSION (Unit : mm)

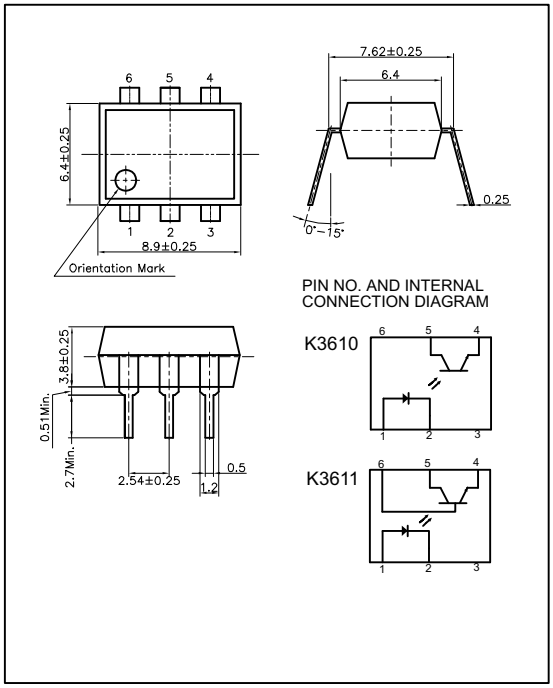

FEATURES

- TTL Compatible Output
- Collector-Emitter Voltage : Min.70V
- Current Transfer Ratio : Typ.50% (at I_F=5mA, V_{CE}=5V)
- Electrical Isolation Voltage : AC2500V_{rms}
- Without Base Connection - K3610
- With Base Connection - K3611
- UL Recognized File No. E107486

APPLICATIONS

- Interface between two circuits of different potential
- Vending Machine, Copiers
- Measuring Instrument
- Home Appliances

MAXIMUM RATINGS

(Ta=25 ℃)

Parameter		Symbol	Rating	Unit
Input	Forward Current	I_F	50	mA
	Reverse Voltage	V_R	5	V
	Peak Forward Current *1	I_{FP}	1	A
	Power Dissipation	P_D	70	mW
Output	Collector-Emitter Breakdown Voltage	BV_{CEO}	70	V
	Emitter-Collector Breakdown Voltage	BV_{ECO}	7	V
	Collector-Base Breakdown Voltage**	BV_{CBO}	80	V
	Collector Current	I_C	50	mA
	Collector Power Dissipation	P_C	150	mW
Input to Output Isolation Voltage *2		V_{iso}	AC2500	V_{rms}
Storage Temperature		T_{stg}	-55~+125	℃
Operating Temperature		T_{opr}	-30~+100	℃
Lead Soldering Temperature *3		T_{sol}	260	℃
Total Power Dissipation		P_{tot}	200	mW

** Except for K3610

*1. Input current with 100μs pulse width, 1% duty cycle

*2. Measured at RH=40~60% for 1min

*3. 1/16 inch form case for 10sec

K3610 • K3611

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25℃ , unless otherwise noted)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit.
Input	Forward Voltage	V_F	I_F=10mA	-	1.15	1.30	V
	Reverse Current	I_R	V_R=5V	-	-	10	μA
	Capacitance	C_T	V=0, f=1MHz	-	30	-	pF
Output	Collector-Emitter Breakdown Voltage	BV_{CEO}	I_C=1mA	70	-	-	V
	Emitter-Collector Breakdown Voltage	BV_{ECO}	I_E=0.1mA	7	-	-	V
	Collector-Base Breakdown Voltage **	BV_{CBO}	I_C=1mA	80	-	-	V
	Collector Dark Current	I_{CEO}	I_F=0, V_{CE}=24V	-	-	100	nA
	Capacitance	C_{CE}	V_{CE}=0, f=1MHz	-	10	-	pF
Coupled	Current Transfer Ratio*4	CTR	I_F=5mA, V_{CE}=5V	50	-	600	%
	Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	I_F=5mA, I_C=1mA	-	-	0.3	V
	Input-Output Capacitance	C_{IO}	V=0, f=1MHz	-	1	-	pF
	Input-Output Isolation Resistance	R_{IO}	RH=40~60%, V=500V	-	10^{11}	-	Ω
	Rise Time	tr	V_{CE}=10V, R_L=100Ω	-	3	-	μs
	Fall Time	tf	I_C=2mA	-	3	-	μs

** Except for K3610

*4. CTR=(I_C/I_F) X 100 (%)

K3610 • K3611

Forward Current vs. Ambient Temperature

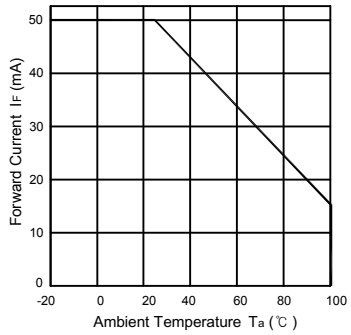

Collector Power Dissipation vs. Ambient Temperature

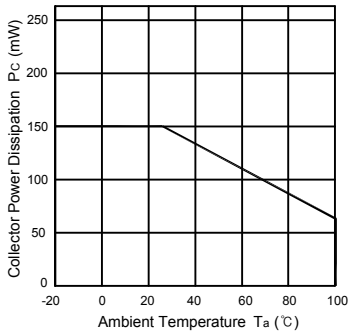

Forward Current vs. Forward Voltage



Collector Current vs. Collector-Emitter Voltage



Dark Current vs. Ambient Temperature

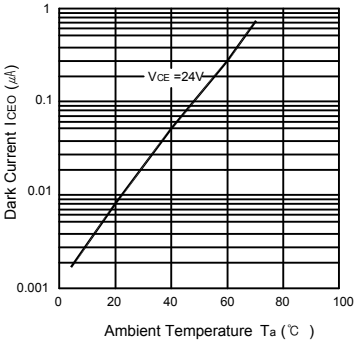

Collector Current vs. Ambient Temperature



Response Time vs. Load Resistance

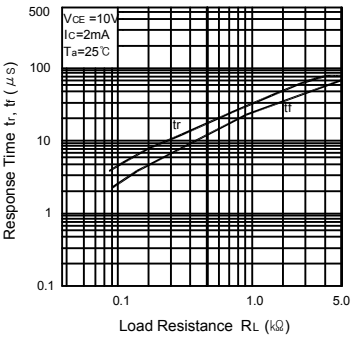

Collector Current vs. Forward Current

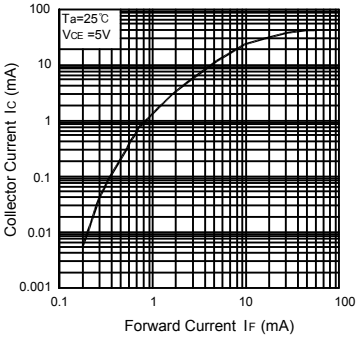
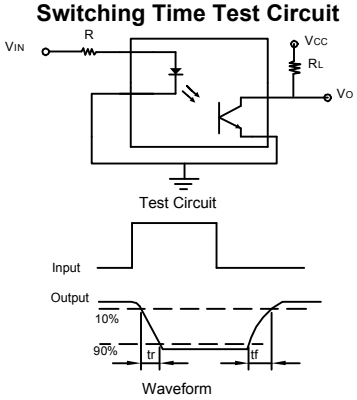
Switching Time Test Circuit