
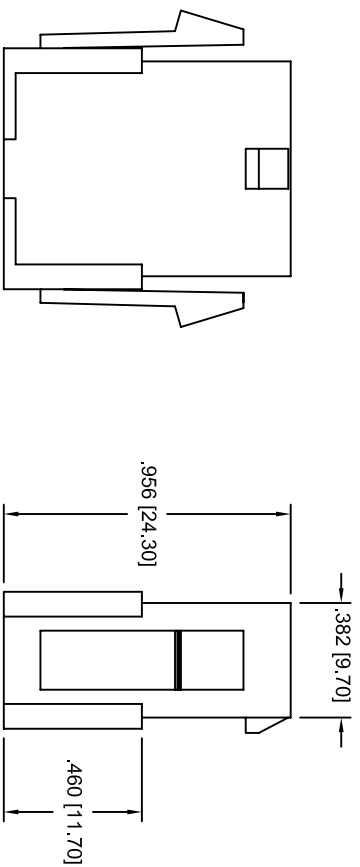


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/13/04	

APPROVED: _____
 DATE: _____ TITLE: _____

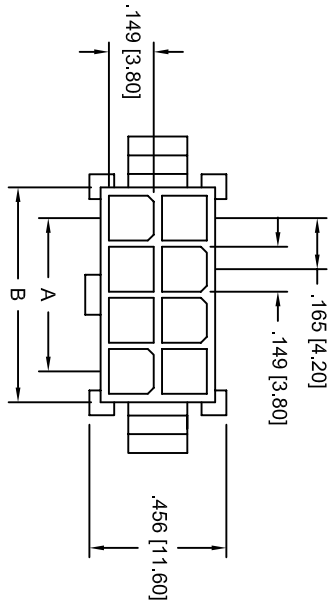

8 Position Shown

Position	A	B
2	4.2	5.6
3	8.4	14.0
4	4.2	9.8
5	16.8	22.4
6	8.4	14.0
8	12.6	18.2
10	16.8	22.4
12	21.0	26.6
14	25.2	30.8
16	29.4	35.0
18	33.6	39.2
20	37.8	43.4
22	42.0	47.6
24	46.2	51.8

SPECIFICATIONS:

Material:
 Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Natural
Electrical:
 Operating voltage: 300 VAC max
 Current rating: 5 Amps max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -25°C to +120°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec



6


5

4

3

2

1

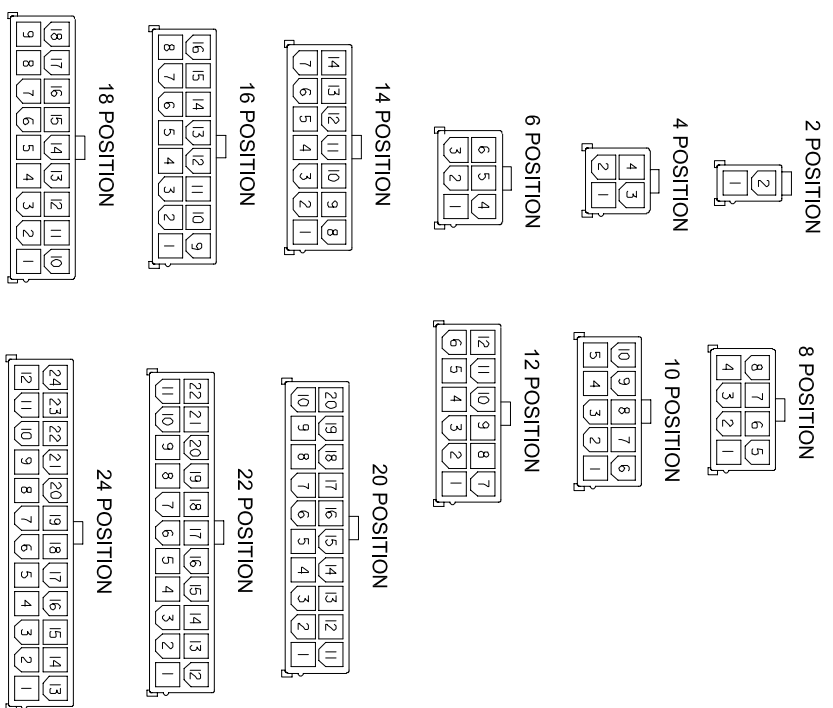

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED
 INCHES

.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010

HOLDING HOLE: ØX ± .10
 HOLE: ØXX ± .015
 APPROVALS: _____ DATE: _____

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE TO WIRE CONNECTOR HOUSING
 FEMALE, 4.2MM PITCH

DRAWN	SS	10/13/04	SIZE	PART NO.	REV.
CHECKED			X	DMHF-XX	-
APPROVED			REF:	SCALE: NTS	SHEET 1 OF 1