


1. Dimensions:

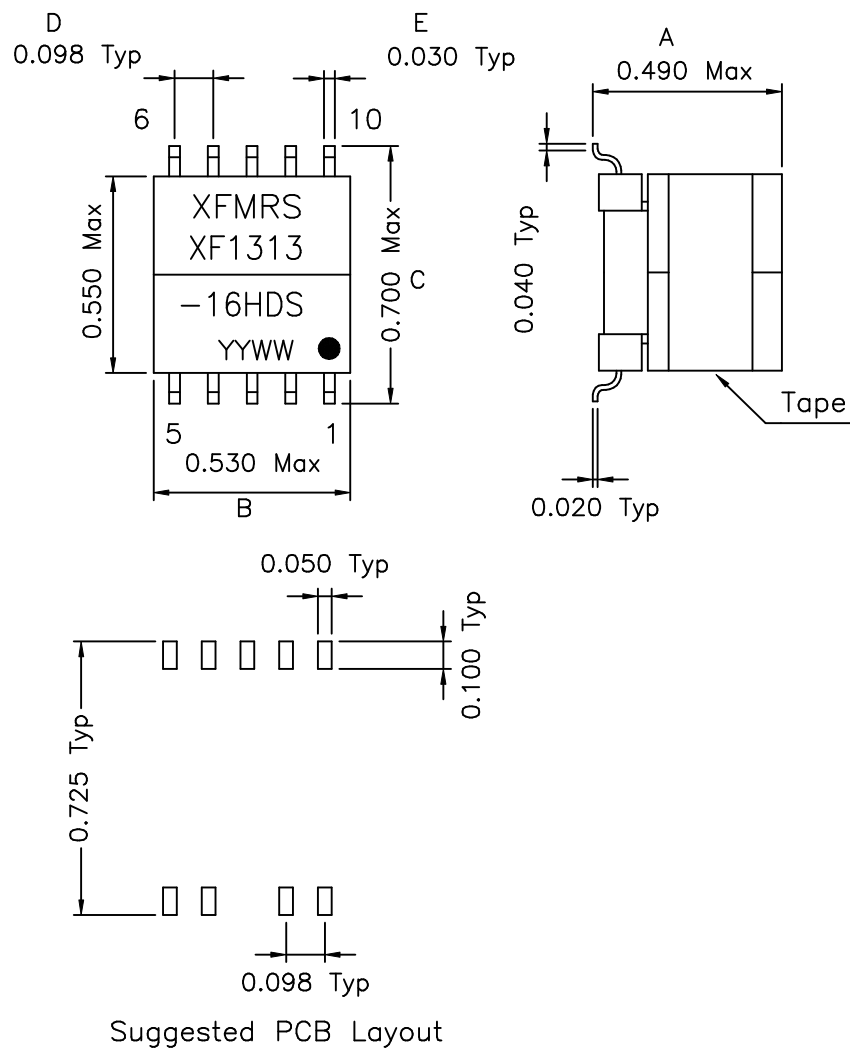


Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -40°C to +85°C

DOC. REV A/2

2.Schematic:



3.Electrical Specifications: @25°C

PIN1-5 OCL: 2.0mH $\pm 6\%$ @10KHz 0.1V 0/160mAdc
(CONNECT PIN2-4)

PIN1-5 LL: 17uH Max @100KHz 100mV
(CONNECT PIN2-4, PIN7-9)

Turns Ratio: Line:Chip = 3.7CS:1 $\pm 1\%$

CW/W: PIN1-9 80pF Max, Connect PIN2-4 @100KHz 0.1V

DC Res.: P1-5 2.5 Ohms Max TIE P4-2

DC Res.: P9-7 0.620 Ohm Max

THD: 70dB Min @20KHz 4.5VP-P

RETURN LOSS: 16.5dB Min. @40KHz-300KHz

INSERTION LOSS: 0.5dB Max @40KHz

LONGITUDINAL BALANCE: 50dB Min. @40KHz-300KHz

FREQ RESP: ± 0.1 dB, 33KHz-110KHz

ISOLATION VOLTAGE: 2000Vrms (Chip to Line)

TEMPERATURE RANGE: -40°C - +85°C

UL1950 approved for the requirements of
Supplementary Insulation with 300 working volts.
UL file #E165866

XFMRS Inc	Title: HDL TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED		P/N: XF1313-16HDS
	TOLERANCES:		REV. A
	.xxx ± 0.010		DWN. 廖玉坤 Jan-10-01
Dimensions in INCH		CHK. 李清儿	Jan-10-01
SHEET 1 OF 1		APP. Joe Huff	Jan-10-01