


PIN ON	NAME
C1	VCC (SUPPLY VOLTAGE)
C2	RST (RESET SIGNAL)
C3	CLK (CLOCK SIGNAL)
CD	DETECT SWITCH
C5	GND
C6	VPP (VARIABLE SUPPLY BOLTAGE)
C7	I/O (DATE INPUT/OUTPUT)

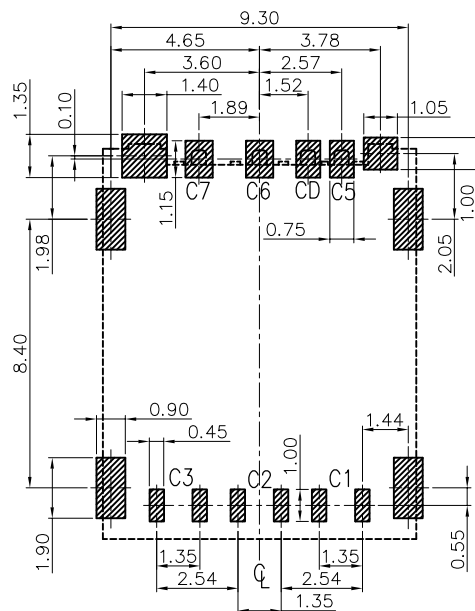

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE: ±0.05

NOTES:

1. MATERIAL:

- 1-1 HOUSING: THERMOPLASTIC, UL94 V-0 . COLOR;BLACK
- 1-2 SHELL; STAINLESS STEEL
- 1-3 CONTACT: COPPER ALLOY

2. FINISH:

- 2-1 CONTACT: 1u" AU MIN. ON CONTACT AREA
GOLD FLASH ON SOLD AREA.
50u" NI MIN. UNDERPLATING OVER ALL
- 2-2 SHELL: GOLD FLASH ON SOLD AREA

3. PRODUCT SPECIFICATIONS:

- 3-1 VOLTAGE RATING: 30V
- 3-2 WITHSTANDING VOLTAGE: AC500V R.M.S
- 3-3 CURRENT RATING: 0.5A
- 3-4 INSULATION RESISTANCE; 100MEG.OHM MIN AT DC 500V
- 3-5 CONTACT RESISTANED: 100 MILL.OHM MAX
- 3-6 OPERATION TEMPERATURE: -40° TO +60°
- 3-7 DURABILITY:5000 CYCLES



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X: ±2° X.X° ±0.5°

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

柯南

DATE :

2014-02-23

PART NAME:

NANO SIM 7P 1.4H 直插式

PART NO.

HYC244-SIM07-140

MOLD NO.

DRAW NO:

HYC-1912201715

SHEET NO.

1 OF 1