


Broadband Microwave Coaxial Noise Sources

NS5102-A2X

1000 MHz to 18000 MHz

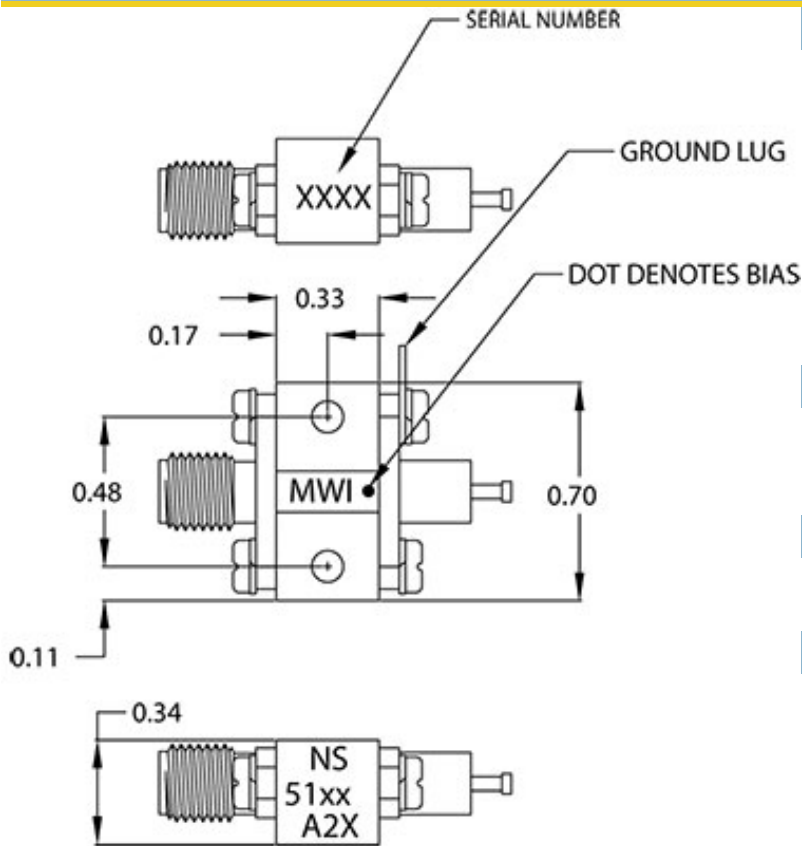

Specifications

RF Frequency	1000 MHz to 18000 MHz
Noise Output	25 dB ENR
Noise Spectral Density (N_0)	-149 dBm/Hz
Flatness	2 dB P-P Max
VSWR	1.7:1 Max
Peak Factor	5:1
Bias Voltage	15 V
Supply Current	15 mA Max
Impedance	50 ohms

Package and Connectivity

Construction	Coaxial
Package Type	X
Connector Type	SMA(f)

Environmental

Operating Temperature	-55 to 125 °C
Storage Temperature	-65 to 150 °C

Notes

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

