Document Title

256Kx16 bit Low Power and Low Voltage CMOS Static RAM

Revision History

Revision No	History	Draft Date	Remark
0.0	Initial draft	July 29, 2002	Preliminary
0.1	Revised - Added Commercial product - Deleted 44-TSOP2-400R Package Type. - Added 55ns product(@ 3.0V~3.6V)	December 2, 2002	Preliminary
1.0	Finalized Revised - Changed I_{CC}(Operating power supply current) from 4mA to 2mA - Changed $I_{CC}1$(Average operating current) from 4mA to 3mA - Changed $I_{CC}2$(Average operating current) from 40mA to 25mA - Changed $I_{SB}1$(Standby Current(CMOS), Commercial) from 15μA to 10μA - Changed $I_{SB}1$(Standby Current(CMOS), Industrial) from 20μA to 10μA - Changed $I_{SB}1$(Standby Current(CMOS), Automotive) from 30μA to 20μA - Changed I_{DR}(Data retention current, Commercial) from 15μA to 10μA - Changed I_{DR}(Data retention current, Industrial) from 20μA to 10μA - Changed I_{DR}(Data retention current, Automotive) from 30μA to 20μA	August 8, 2003	Final

The attached datasheets are provided by SAMSUNG Electronics. SAMSUNG Electronics CO., LTD. reserve the right to change the specifications and products. SAMSUNG Electronics will answer to your questions about device. If you have any questions, please contact the SAMSUNG branch offices.

256Kx16 bit Low Power and Low Voltage CMOS Static RAM

FEATURES

- Process Technology: Full CMOS
- Organization: 256K x16
- Power Supply Voltage: 2.7~3.6V
- Low Data Retention Voltage: 2V(Min)
- Three State Outputs
- Package Type: 44-TSOP2-400F

GENERAL DESCRIPTION


The K6X4016T3F families are fabricated by SAMSUNG′s advanced CMOS process technology. The families support various operating temperature range and have 44-TSOP2 package type for user flexibility of system design. The families also support low data retention voltage for battery back-up operation with low data retention current.

PRODUCT FAMILY

Product Family	Operating Temperature	Vcc Range	Speed(ns)	Power Dissipation		PKG Type
				Standby (I_{SB1}, Max)	Operating (I_{CC2}, Max)	
K6X4016T3F-B	Commercial(0~70°C)	2.7~3.6V	55[1]/70[2]/85ns	10μA	25mA	44-TSOP2-400F
K6X4016T3F-F	Industrial(-40~85°C)			10μA		
K6X4016T3F-Q	Automotive(-40~125°C)		70[2]/85ns	20μA		


1. This parameter is measured with 30pF test load (Vcc=3.0~3.6V).
2. The parameter is measured with 30pF test load.

PIN DESCRIPTION

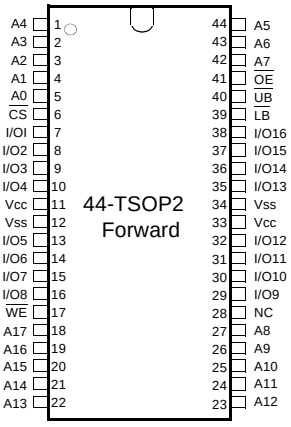

Name	Function	Name	Function
$\overline{CS}$	Chip Select Input	Vcc	Power
$\overline{OE}$	Output Enable Input	Vss	Ground
$\overline{WE}$	Write Enable Input	$\overline{LB}$	Lower Byte ($I/O_{1\sim8}$)
A_0~A_{17}	Address Inputs	$\overline{UB}$	Upper Byte ($I/O_{9\sim16}$)
I/O_1~I/O_{16}	Data Input/Output	NC	No Connection

FUNCTIONAL BLOCK DIAGRAM

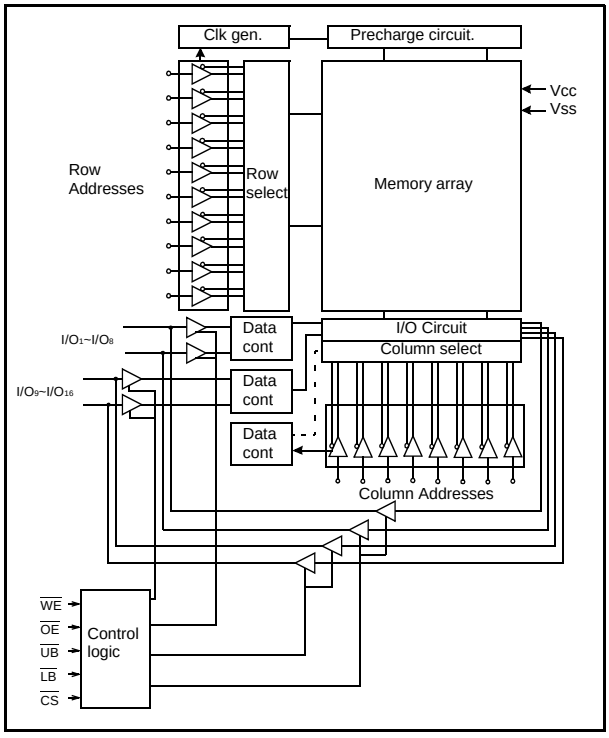

SAMSUNG ELECTRONICS CO., LTD. reserves the right to change products and specifications without notice.

PRODUCT LIST

Commercial Products(0~70°C)		Industrial Products(-40~85°C)		Automotive Products(-40~125°C)	
Part Name	**Function**	**Part Name**	**Function**	**Part Name**	**Function**
K6X4016T3F-TB55[1)] K6X4016T3F-TB70 K6X4016T3F-TB85	44-TSOP2-F, 55ns, LL 44-TSOP2-F, 70ns, LL 44-TSOP2-F, 85ns, LL	K6X4016T3F-TF55[1)] K6X4016T3F-TF70 K6X4016T3F-TF85	44-TSOP2-F, 55ns, LL 44-TSOP2-F, 70ns, LL 44-TSOP2-F, 85ns, LL	K6X4016T3F-TQ70 K6X4016T3F-TQ85	44-TSOP2-F, 70ns, L 44-TSOP2-F, 85ns, L

1. Operating voltage range is 3.0~3.6V

FUNCTIONAL DESCRIPTION

$\overline{CS}$	$\overline{OE}$	$\overline{WE}$	$\overline{LB}$	$\overline{UB}$	I/O1~8	I/O9~16	Mode	Power
H	X[1)]	X[1)]	X[1)]	X[1)]	High-Z	High-Z	Deselected	Standby
L	H	H	X[1)]	X[1)]	High-Z	High-Z	Output Disabled	Active
L	X[1)]	X[1)]	H	H	High-Z	High-Z	Output Disabled	Active
L	L	H	L	H	Dout	High-Z	Lower Byte Read	Active
L	L	H	H	L	High-Z	Dout	Upper Byte Read	Active
L	L	H	L	L	Dout	Dout	Word Read	Active
L	X[1)]	L	L	H	Din	High-Z	Lower Byte Write	Active
L	X[1)]	L	H	L	High-Z	Din	Upper Byte Write	Active
L	X[1)]	L	L	L	Din	Din	Word Write	Active

1. X means don't care. (Must be in low or high state)

ABSOLUTE MAXIMUM RATINGS[1)]

Item	Symbol	Ratings	Unit	Remark
Voltage on any pin relative to Vss	V_{IN},V_{OUT}	-0.2 to V_{CC}+0.3(max. 3.9V)	V	-
Voltage on Vcc supply relative to Vss	V_{CC}	-0.2 to 3.9	V	-
Power Dissipation	P_D	1.0	W	-
Storage temperature	T_{STG}	-65 to 150	°C	-
Operating Temperature	T_A	0 to 70	°C	K6X4016T3F-B
		-40 to 85		K6X4016T3F-F
		-40 to 125		K6X4016T3F-Q

1. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Functional operation should be restricted to recommended operating condition. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS[1)]

Item	Symbol	Min	Typ	Max	Unit
Supply voltage	Vcc	2.7	3.0/3.3	3.6	V
Ground	Vss	0	0	0	V
Input high voltage	V_{IH}	2.2	-	Vcc+0.2[2)]	V
Input low voltage	V_{IL}	-0.2[3)]	-	0.6	V

Note:
1. Commercial Product: T_A=0 to 70°C, otherwise specified.
   Industrial Product: T_A=-40 to 85°C, otherwise specified.
   Automotive Product: T_A=-40 to 125°C, otherwise specified.
2. Overshoot: V_{CC}+2.0V in case of pulse width ≤ 30ns.
3. Undershoot: -2.0V in case of pulse width ≤ 30ns.
4. Overshoot and undershoot are sampled, not 100% tested.

CAPACITANCE[1)] (f=1MHz, T_A=25°C)

Item	Symbol	Test Condition	Min	Max	Unit
Input capacitance	C_{IN}	V_{IN}=0V	-	8	pF
Input/Output capacitance	C_{IO}	V_{IO}=0V	-	10	pF

1. Capacitance is sampled, not 100% tested


DC AND OPERATING CHARACTERISTICS

Item	Symbol	Test Conditions		Min	Typ	Max	Unit
Input leakage current	I_{LI}	V_{IL}=Vss to Vcc		-1	-	1	µA
Output leakage current	I_{LO}	$\overline{CS}$=V_{IH} or $\overline{OE}$=V_{IH} or $\overline{WE}$=V_{IL} V_{IO}=Vss to Vcc		-1	-	1	µA
Operating power supply current	I_{CC}	I_{IO}=0mA, $\overline{CS}$=V_{IL}, V_{IN}=V_{IL} or V_{IH}, Read		-	-	2	mA
Average operating current	I_{CC1}	Cycle time=1µs, 100% duty, I_{IO}=0mA $\overline{CS}$≤0.2V, V_{IN}≤0.2V or V_{IN}≥Vcc-0.2V		-	-	3	mA
	I_{CC2}	Cycle time=Min[2)], 100% duty, I_{IO}=0mA, $\overline{CS}$=V_{IL}, V_{IN}=V_{IH} or V_{IL}		-	-	25	mA
Output low voltage	V_{OL}	I_{OL}=2.1mA		-	-	0.4	V
Output high voltage	V_{OH}	I_{OH}=-1.0mA		2.4	-	-	V
Standby Current(TTL)	I_{SB}	$\overline{CS}$=V_{IH}, Other inputs=V_{IL} or V_{IH}		-	-	0.3	mA
Standby Current(CMOS)	I_{SB1}	$\overline{CS}$≥Vcc-0.2V, Other inputs=0~Vcc	K6X4016T3F-B	-	-	10	µA
			K6X4016T3F-F	-	-	10	µA
			K6X4016T3F-Q	-	-	20	µA

AC OPERATING CONDITIONS

TEST CONDITIONS(Test Load and Input/Output Reference)

Input pulse level: 0.4 to 2.2V
Input rising and falling time: 5ns
Input and output reference voltage: 1.5V
Output load(see right): C_L=100pF+1TTL
C_L=30pF+1TTL

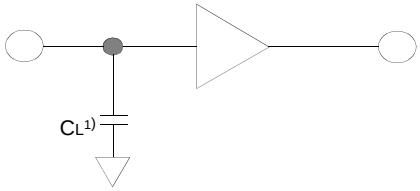

1.Including scope and jig capacitance

AC CHARACTERISTICS

(V_{CC}=2.7~3.6V, Commercial product: T_A=0 to 70°C, Industrial product: T_A=-40 to 85°C, Automotive product: T_A=-40 to 125°C)

Parameter List		Symbol	Speed Bins						Units
			55ns[1]		70ns		85ns		
			Min	Max	Min	Max	Min	Max	
Read	Read cycle time	t_{RC}	55	-	70	-	85	-	ns
	Address access time	t_{AA}	-	55	-	70	-	85	ns
	Chip select to output	t_{CO}	-	55	-	70	-	85	ns
	Output enable to valid output	t_{OE}	-	25	-	35	-	40	ns
	$\overline{LB}$, $\overline{UB}$ valid to data output	t_{BA}	-	25	-	35	-	40	ns
	Chip select to low-Z output	t_{LZ}	10	-	10	-	10	-	ns
	Output enable to low-Z output	t_{OLZ}	5	-	5	-	5	-	ns
	$\overline{LB}$, $\overline{UB}$ enable to low-Z output	t_{BLZ}	5	-	5	-	5	-	ns
	Output hold from address change	t_{OH}	10	-	10	-	10	-	ns
	Chip disable to high-Z output	t_{HZ}	0	20	0	25	0	25	ns
	$\overline{OE}$ disable to high-Z output	t_{OHZ}	0	20	0	25	0	25	ns
	$\overline{LB}$, $\overline{UB}$ disable to high-Z output	t_{BHZ}	0	20	0	25	0	25	ns
Write	Write cycle time	t_{WC}	55	-	70	-	85	-	ns
	Chip select to end of write	t_{CW}	45	-	60	-	70	-	ns
	Address set-up time	t_{AS}	0	-	0	-	0	-	ns
	Address valid to end of write	t_{AW}	45	-	60	-	70	-	ns
	Write pulse width	t_{WP}	40	-	55	-	60	-	ns
	Write recovery time	t_{WR}	0	-	0	-	0	-	ns
	Write to output high-Z	t_{WHZ}	0	20	0	25	0	25	ns
	Data to write time overlap	t_{DW}	25	-	30	-	35	-	ns
	Data hold from write time	t_{DH}	0	-	0	-	0	-	ns
	End write to output low-Z	t_{OW}	5	-	5	-	5	-	ns
	$\overline{LB}$, $\overline{UB}$ valid to end of write	t_{BW}	45	-	60	-	70	-	ns


1. Voltage range is 3.0V~3.6V for commercial and industrial product.

DATA RETENTION CHARACTERISTICS


Item	Symbol	Test Condition		Min	Typ	Max	Unit
Vcc for data retention	V_{DR}	$\overline{CS}$≥Vcc-0.2V		2.0	-	3.6	V
Data retention current	I_{DR}	Vcc=3.0V, $\overline{CS}$≥Vcc-0.2V	K6X4016T3F-B	-	-	10	µA
			K6X4016T3F-F			10	µA
			K6X4016T3F-Q			20	µA
Data retention set-up time	t_{SDR}	See data retention waveform		0	-	-	ms
Recovery time	t_{RDR}			5	-	-	

TIMING DIAGRAMS

TIMING WAVEFORM OF READ CYCLE(1) (Address Controlled, $\overline{CS}$=$\overline{OE}$=V_{IL}, $\overline{WE}$=V_{IH}, $\overline{UB}$ or/and $\overline{LB}$=V_{IL})

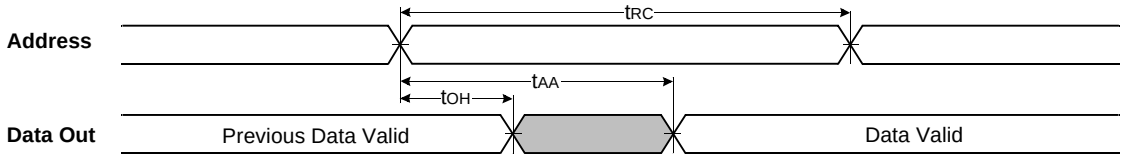


TIMING WAVEFORM OF READ CYCLE(2) ($\overline{WE}$=V_{IH})

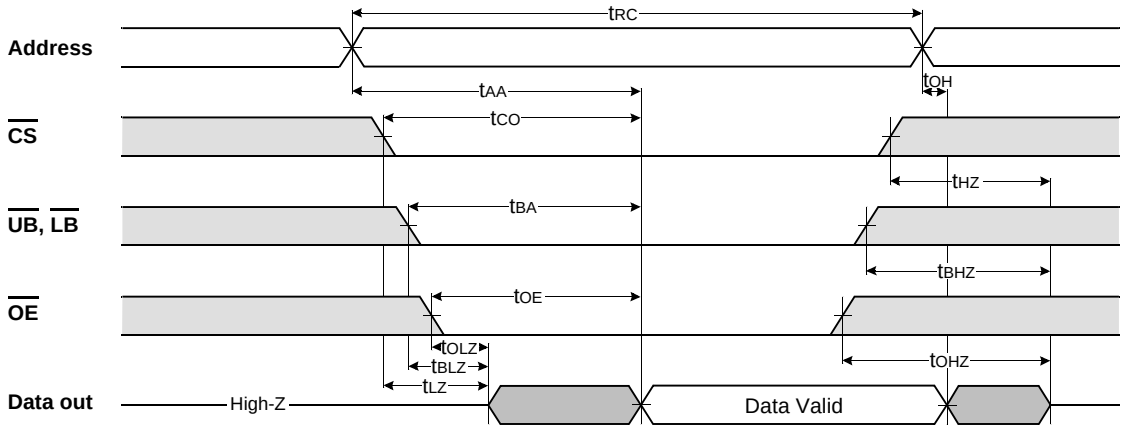


NOTES (READ CYCLE)

1. t_{HZ} and t_{OHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referenced to output voltage levels.
2. At any given temperature and voltage condition, t_{HZ}(Max.) is less than t_{LZ}(Min.) both for a given device and from device to device interconnection.


TIMING WAVEFORM OF WRITE CYCLE(1) ($\overline{WE}$ Controlled)

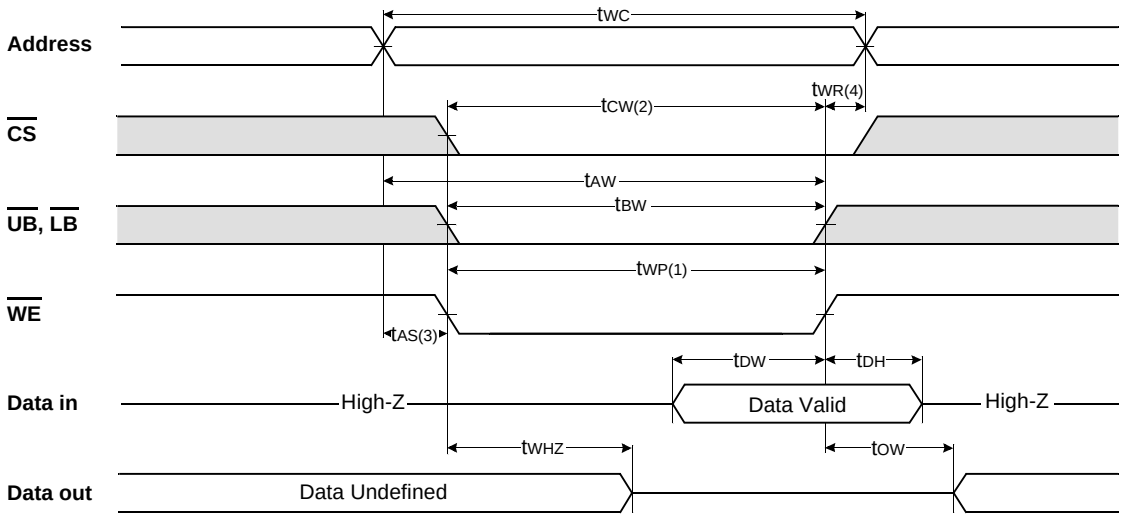

TIMING WAVEFORM OF WRITE CYCLE(2) ($\overline{CS}$ Controlled)

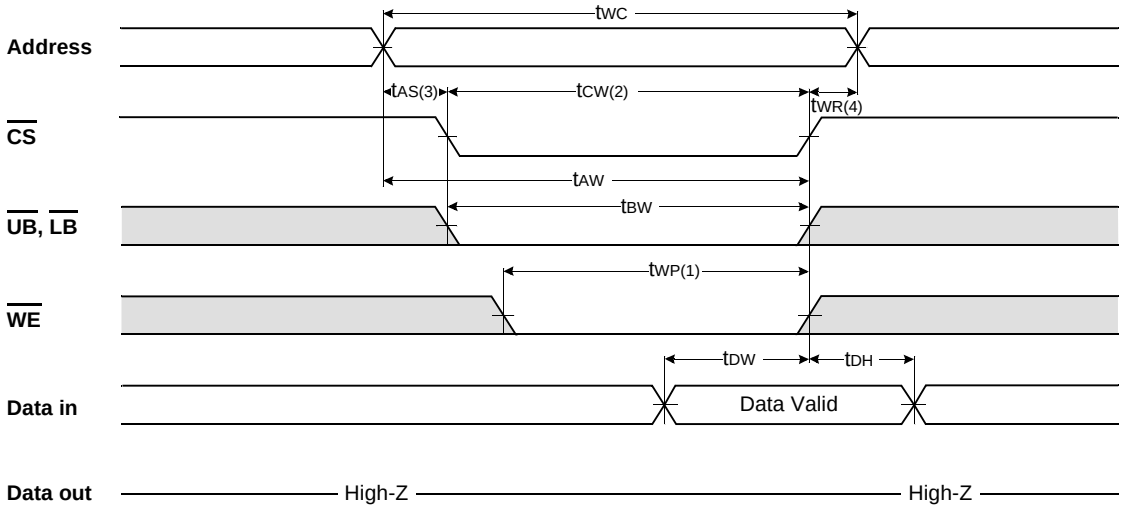

TIMING WAVEFORM OF WRITE CYCLE(3) ($\overline{UB}$, $\overline{LB}$ Controlled)

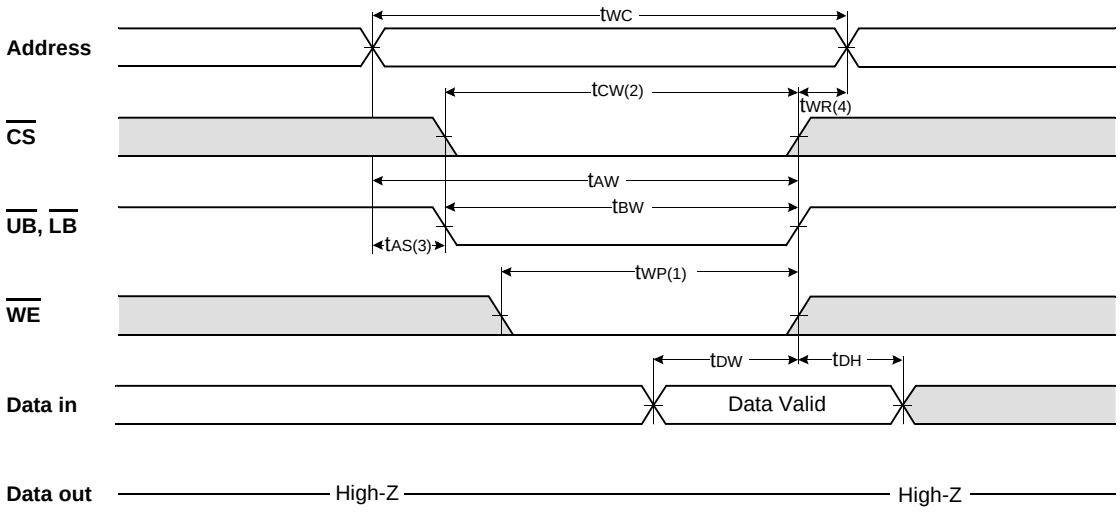


NOTES (WRITE CYCLE)

1. A write occurs during the overlap(t_{WP}) of low $\overline{CS}$ and low $\overline{WE}$. A write begins when $\overline{CS}$ goes low and $\overline{WE}$ goes low with asserting $\overline{UB}$ or $\overline{LB}$ for single byte operation or simultaneously asserting $\overline{UB}$ and $\overline{LB}$ for double byte operation. A write ends at the earliest transition when $\overline{CS}$ goes high and $\overline{WE}$ goes high. The t_{WP} is measured from the beginning of write to the end of write.
2. t_{CW} is measured from the $\overline{CS}$ going low to the end of write.
3. t_{AS} is measured from the address valid to the beginning of write.
4. t_{WR} is measured from the end of write to the address change. t_{WR} is applied in case a write ends with $\overline{CS}$ or $\overline{WE}$ going high.

DATA RETENTION WAVE FORM

$\overline{CS}$ controlled

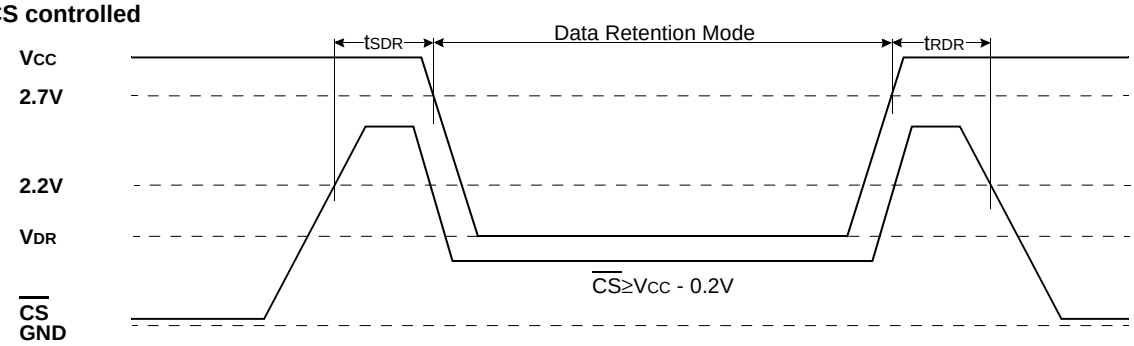

PACKAGE DIMENSIONS

Unit: millimeter(inch)

44 PIN THIN SMALL OUTLINE PACKAGE TYPE II (400F)

