

isc Silicon PNP Power Transistor

2SB982

DESCRIPTION



- Collector-Emitter Breakdown Voltage-  
:  $V_{(BR)CEO} = -150V(\text{Min})$
- Good Linearity of  $h_{FE}$
- Wide Area of Safe Operation

APPLICATIONS

- Designed for high power amplifications.

ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	-150	V
$V_{CEO}$	Collector-Emitter Voltage	-150	V
$V_{EBO}$	Emitter-Base Voltage	-5	V
$I_C$	Collector Current-Continuous	-9	A
$I_{CP}$	Collector Current-Pulse	-15	A
$P_C$	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	100	W
	Collector Power Dissipation @ $T_a=25^\circ\text{C}$	3	
$T_J$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ\text{C}$

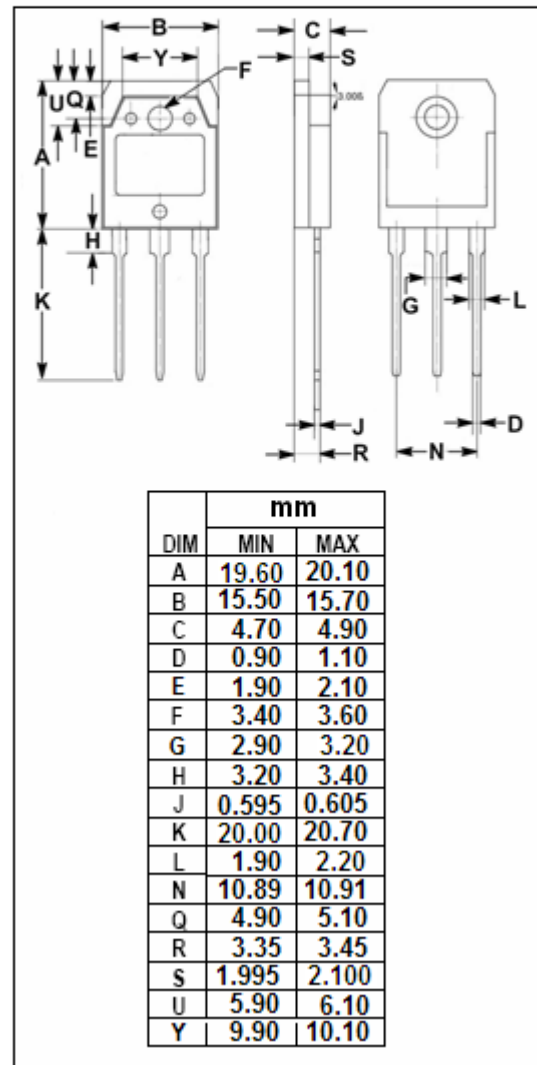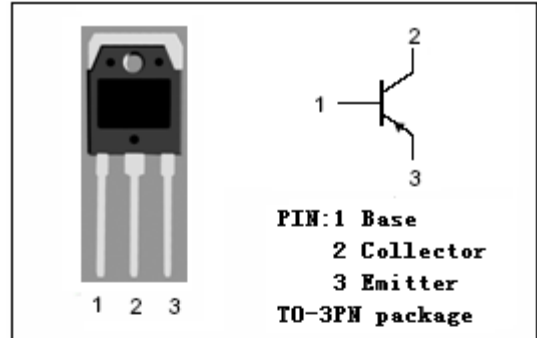

**isc Silicon PNP Power Transistor****2SB982****ELECTRICAL CHARACTERISTICS** $T_C=25^\circ\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -7A; I_B = -0.7A$			-2.0	V
$V_{BE(on)}$	Base -Emitter On Voltage	$I_C = -7A; V_{CE} = -5V$			-1.8	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB} = -150V; I_E = 0$			-50	$\mu\text{A}$
$I_{EBO}$	Emitter Cutoff Current	$V_{EB} = -3V; I_C = 0$			-50	$\mu\text{A}$
$h_{FE-1}$	DC Current Gain	$I_C = -20mA; V_{CE} = -5V$	20			
$h_{FE-2}$	DC Current Gain	$I_C = -1A; V_{CE} = -5V$	60		200	
$h_{FE-3}$	DC Current Gain	$I_C = -7A; V_{CE} = -5V$	20			
$f_T$	Current-Gain—Bandwidth Product	$I_C = -0.5A; V_{CE} = -5\text{V}; f = 1\text{MHz}$		200		MHz

◆  **$h_{FE-2}$  Classifications**

Q	S	P
60-120	80-160	100-200