

RoHS Compliant Product

A suffix of "-C" specifies halogen and lead-free

DESCRIPTION

The KS05N2 is designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, low capacitance and fast response time provide best in class protection on designs that are exposed to ESD.

The combination of small size, low capacitance, and high level of ESD protection makes them a flexible solution for applications such as USB3.0 power & data line, Video line, and WAN/LAN equipment. It is designed to replace multilayer varistors (MLV) in consumer equipments applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

FEATURES

- Uni-Directional ESD Protection of Two Lines
- Low Capacitance: 0.8pF(Max)
- Low Reverse Stand-off Voltage: 5V
- Low Reverse Clamping Voltage
- Low Leakage Current
- Fast Response Time
- JESD22-A114-B ESD Rating of Class 3B per Human Body Model
- IEC 61000-4-2 Level 4 ESD protection

APPLICATIONS

- USB3.0 Power & Data Line Protection
- WLAN/LAN Equipment
- Mobile Phone
- Video Line Protection
- Microcontroller Input Protection
- ISDN S/T Interface

MARKING

.U5N2


PACKAGE INFORMATION

Package	MPQ	Leader Size
SOT-563	3K	7 inch


ABSOLUTE MAXIMUM RATINGS (T_A=25°C unless otherwise specified)

Parameter		Symbol	Limit	Unit
IEC 61000-4-2 ESD Voltage	Air Model	V _{ESD} ¹	±25	KV
	Contact Model		±25	
	Per Human Body Model		±16	
	Machine Model		±0.4	
Peak Pulse Power ²		P _{PP}	90	W
Peak Pulse Current ²		I _{PP}	3.5	A
Lead Solder Temperature – Maximum(10Sec. Duration)		T _L	260	°C
Operating and Storage Temperature Range		T _J , T _{STG}	150, -55 ~ 150	°C

SOT-563

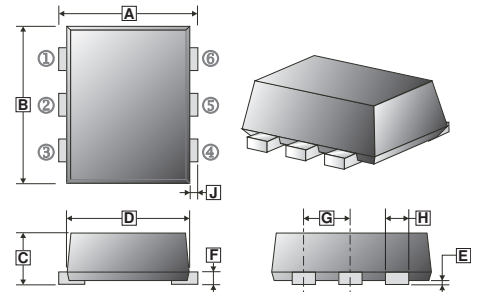


REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	1.50	1.70	F	0.09	0.16
B	1.50	1.70	G	0.45	0.55
C	0.525	0.60	H	0.17	0.27
D	1.10	1.30	J	0.10	0.30
E	-	0.05			

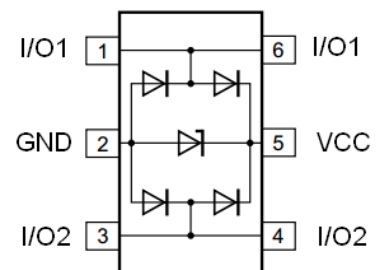


ESD Standards Compliance

IEC61000-4-2 Standard			
Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

JESD22-A114-B Standard	
ESD Class	Human Body Discharge V
0	0 ~ 249
1A	250 ~ 499
1B	500 ~ 999
1C	1000 ~ 1999
2	2000 ~ 3999
3A	4000 ~ 7999
3B	8000 ~ 15999

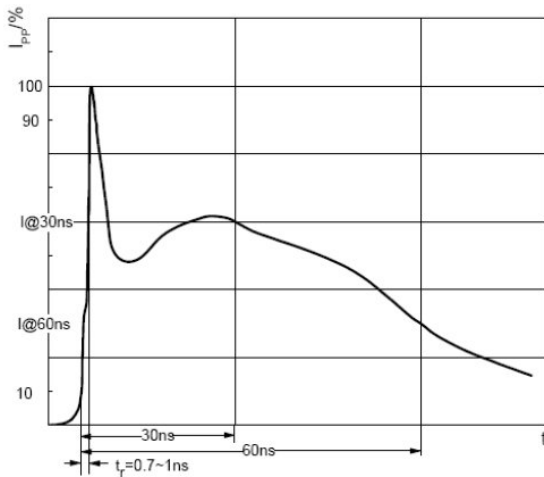


ESD pulse waveform according to IEC61000-4-2

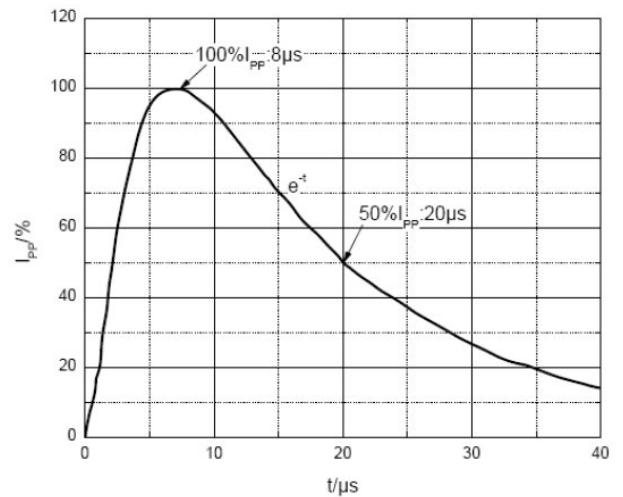

8/20μs pulse waveform according to IEC 61000-4-5

ELECTRICAL PARAMETER

Symbol	Parameter
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Peak Pulse Current
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_R	Reverse Leakage Current @ V_{RWM}
V_{RWM}	Reverse Standoff Voltage
V_F	Forward Voltage @ I_F
I_F	Forward Current

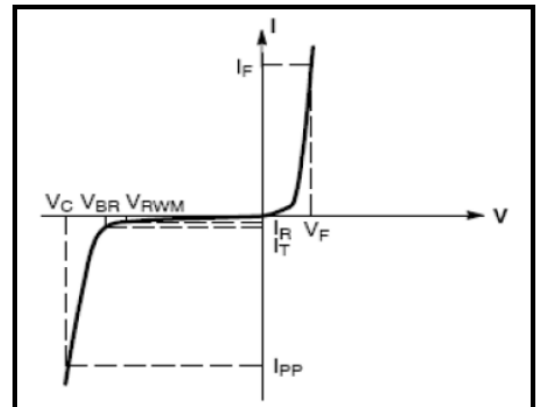

V-I characteristics for a uni-directional TVS

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, I/O to GND unless otherwise specified)


Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Reverse Working Voltage ³	V_{RWM}	-	-	5	V	
Reverse Breakdown Voltage	V_{BR}	6	-	10	V	$I_T=1\text{mA}$
		5	-	12	V	$I_T=1\text{mA}$, V_{CC} to GND
Reverse Leakage Current	I_R	-	-	1	μA	$V_{RWM}=5\text{V}$, I/O & V_{CC} to GND
Forward voltage	V_F	0.4	-	1.5	V	$I_F=10\text{mA}$, I/O & V_{CC} to GND
Clamping Voltage ²	V_C	-	-	13	V	$I_{PP}=1\text{A}$, I/O & V_{CC} to GND
		-	-	25		$I_{PP}=3.5\text{A}$, I/O & V_{CC} to GND
Junction Capacitance	C_J	-	-	0.8	pF	$V_R=0\text{V}$, $f=1\text{MHz}$
		-	-	0.4		$V_R=0\text{V}$, $f=1\text{MHz}$, I/O to I/O

Notes :


1. Device stressed with ten non-repetitive ESD pulses.
2. Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5.
3. Other voltages available upon request.

RATINGS AND CHARACTERISTICS CURVES


Forward Characteristics

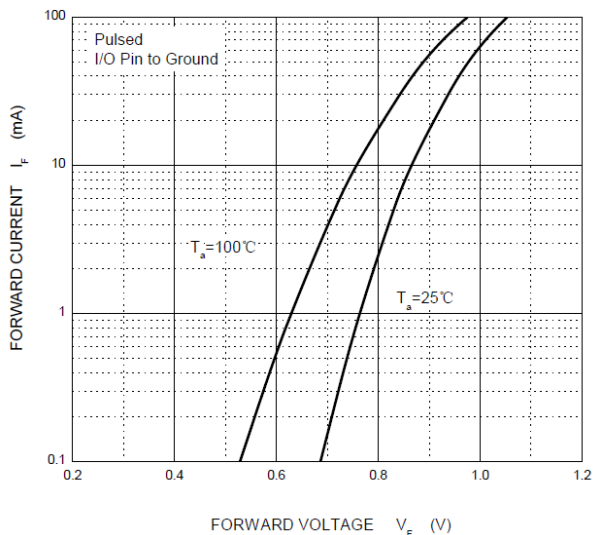


Forward Characteristics

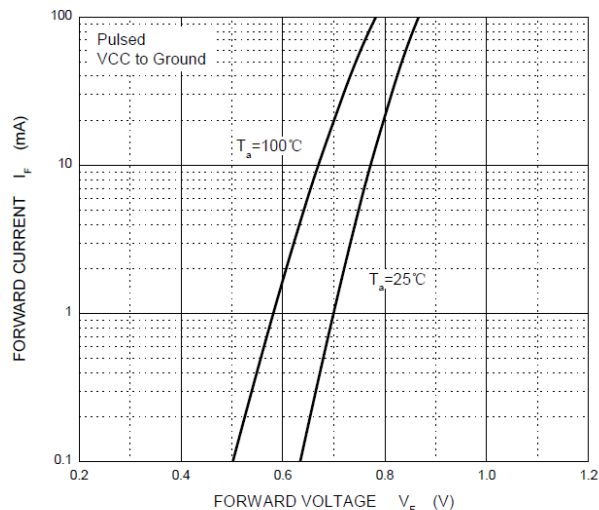


Reverse Characteristics

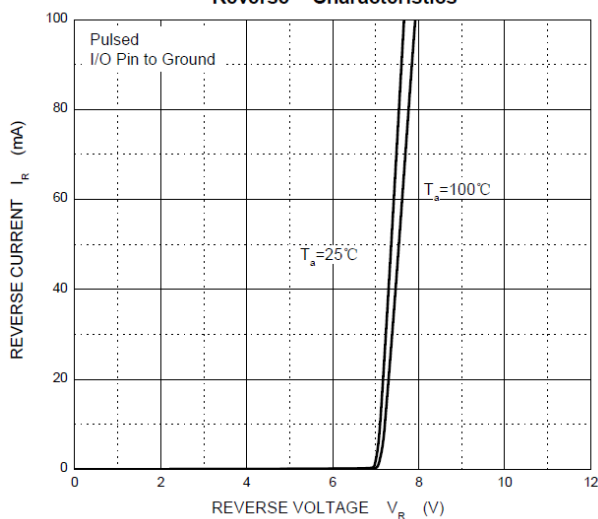

Reverse Characteristics

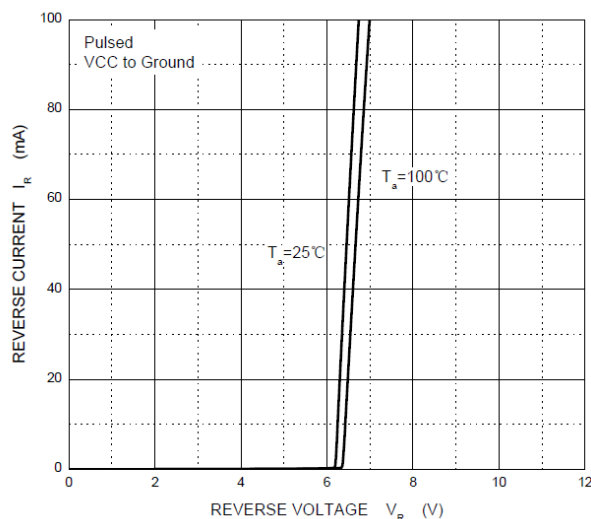

V_C — I_{PP}

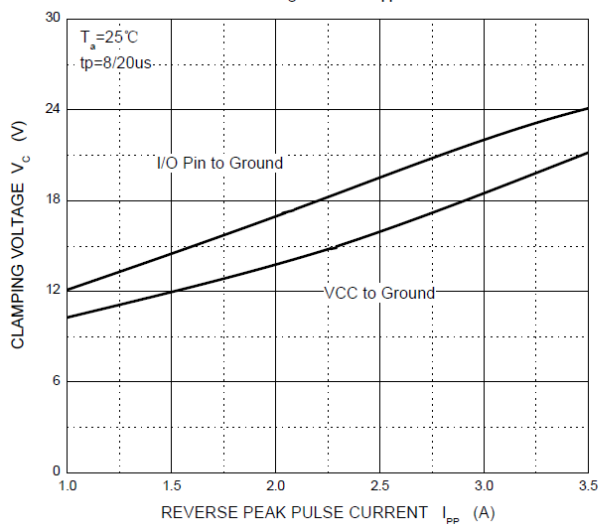

Capacitance Characteristics

