


TP7 CODED SWITCHES (Absolute Encoders)

1. For Pro-use. Channel selector is preset to assigned frequencies:

TP70TF5161 (Single shaft, Triple unit, 16 channels)



Electrical Characteristics

	Specification	Conditions
• Contact resistance	ON: 1Ω max. OFF: 1MΩ min.	Detent position
• Dielectric strength	No dielectric breakdown	300VAC at 1 minute Between terminal - case Between terminal - shaft
• Insulation resistance	100MΩ min.	250VDC at 1 minute Between terminal - case Between terminal - shaft

Mechanical Characteristics

Specification		Conditions				
• Operating force	9.8-58.8mN • m (100-600gf • cm) 19.6-39.2mN • m (200-400gf • cm) for P'GRID products					
	2 CH	3 CH	4 CH	8 CH	16 CH	
• Step angle	30°±3°			22.5°±3°	*20°±3°	22.5°±3°
• Rotational angle	30°±5°	60°±5°	90°±5°	157.5°±5°	*300°±5°	Endless
• Terminal strength	No damage to case and terminal fall-off Bent terminals shall be acceptable No abnormality to be seen in electrical characteristics after testing					Static load of 4.9N (0.5kgf) shall be applied to the tip of the terminals for 15 secs. in vertical direction (1 time/terminal)
• Strength	Shaft pull: 98.1N min. (10kgf min.) Shaft push: 98.1N min. (10kgf min.) Nut tightening: 0.98N • m min. (10kgf • cm min.)					Static load
• Soldering heat resistance	There shall be no mechanical abnormality such as excessive play					Soldering iron: 3 sec. max. at 350°±5°
• Shaft stopper strength	0.39N • m min. (4kgf • cm min.) Not applicable for products with endless rotational angle.					
• Shaft wobble and bend	Radial: 0.5 × shaft length/30mm max. (single shaft/dual outer shaft) Radial: 0.7 × shaft length/30mm max. (dual inner shaft) Thrust: 0.5mm max. 2.5N (250gf) applied to tip of the shaft					

Durability Characteristics

	Specification	Conditions
• Life (without load)	5,000 cycles 30,000 cycles for P'GRID products	Contact resistance (ON): 10Ω max. Contact resistance (OFF): 1MΩ min.
• Operating temperature range	-20°C to +70°C	
• Shaft Seal (Optional O-ring seal between the bushing and shaft)	After mounting a coded switch to a panel and exposing it to water under a maximum hydraulic pressure of 9.8kPa (0.1kgf/cm²) for 30 minutes, there shall be no leak between the shaft and bushing (IP67).	


(*) Also applies to P'GRID products.

♦ All products in this catalog are not for use in life support equipment.

TP/RH Series are NOT board washable.

TP70NF121

Coded Switch, Single Shaft, Single Unit, 1 Circuit, 2 Channel

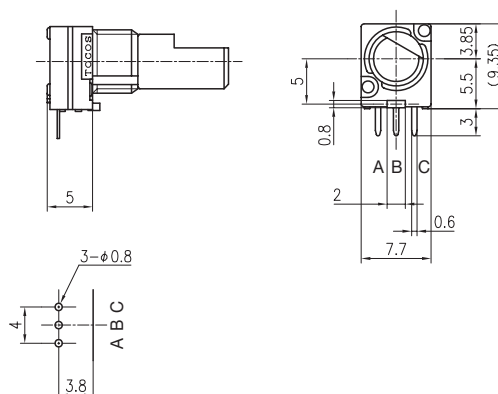


Unit: mm

●:ON
○:OFF

	A-C	B-C
1	●	○
2	○	●

TP70NF232

Coded Switch, Single Shaft, Single Unit, 2 Circuit, 3 Channel

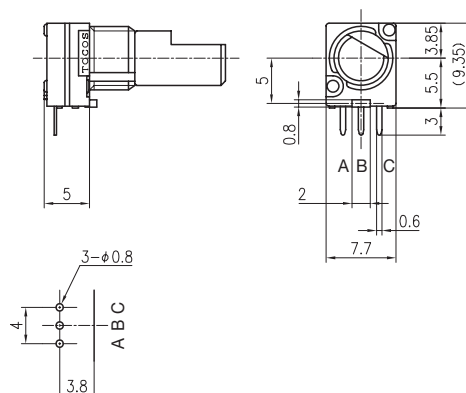


●:ON
○:OFF

	A-B	B-C
1	●	○
2	○	●
3	○	○

TP70NF243

Coded Switch, Single Shaft, Single Unit, 2 Circuit, 4 Channel


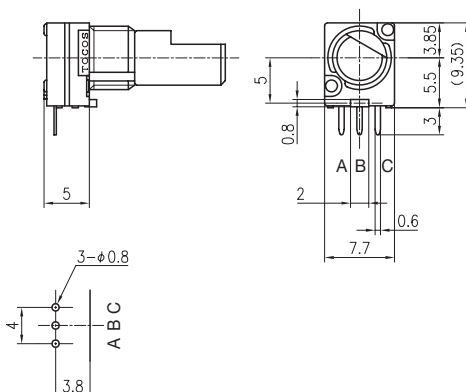


●:ON
○:OFF

	A-B	B-C
1	●	○
2	○	●
3	○	○
4	○	○

TP70GF482

Coded Switch, Single Shaft, Dual Unit, 4 Circuit, 8 Channel

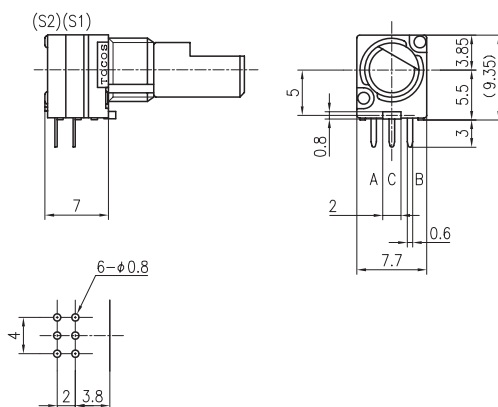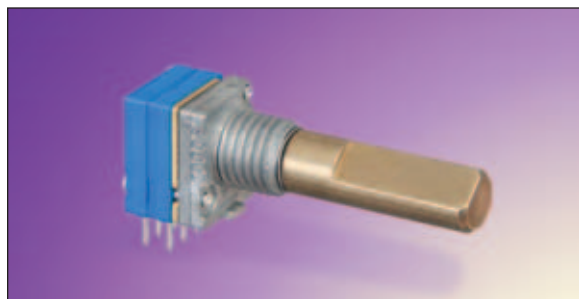



CODE

Detent position	S1		S2	
	A-C	B-C	A-C	B-C
FULL CCW	1	●	○	○
CW	2	○	●	○
	3	○	○	●
	4	○	○	○
	5	○	○	○
	6	○	○	○
	7	○	○	○
	8	○	○	○

●:ON
○:OFF

TP70GF484

Coded Switch, Single Shaft, Dual Unit, 4 Circuit, 8 Channel

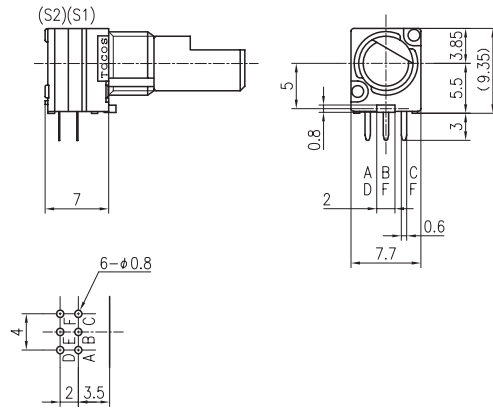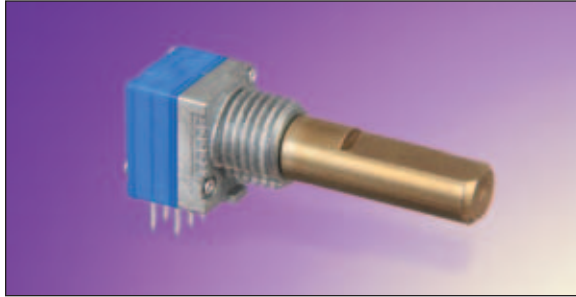

Unit: mm


8CH CODE

	A-B	B-C	B-D	B-F
1	●	○	○	○
2	○	○	○	○
3	○	○	○	○
4	○	○	○	○
5	○	○	○	○
6	○	○	○	○
7	○	○	○	○
8	○	○	○	○

● : ON
○ : OFF

TP70TF5161

Coded Switch, Single Shaft, Triple Unit, 5 Circuit, 16 Channel

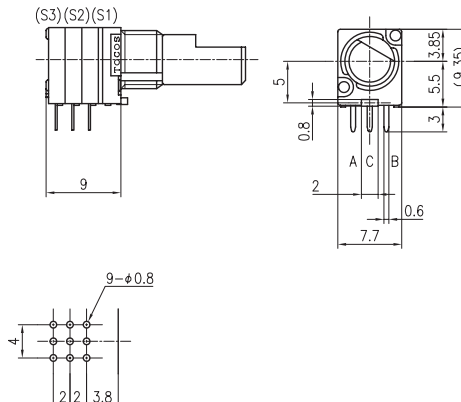


CODE

Detent position	S1		S2		S3
	A-C	B-C	A-C	B-C	A-C
FULL CCW 1	○	○	○	○	○
2	○	○	○	○	○
3	○	○	○	○	○
4	○	○	○	○	○
5	○	○	○	○	○
6	○	○	○	○	○
7	○	○	○	○	○
8	○	○	○	○	○
9	○	○	○	○	○
10	○	○	○	○	○
11	○	○	○	○	○
12	○	○	○	○	○
13	○	○	○	○	○
14	○	○	○	○	○
15	○	○	○	○	○
16	○	○	○	○	○

● : ON
○ : OFF

TP70TF5163

High Torque Coded Switch, Single Shaft, Triple Unit, 5 Circuit, 16 Channel

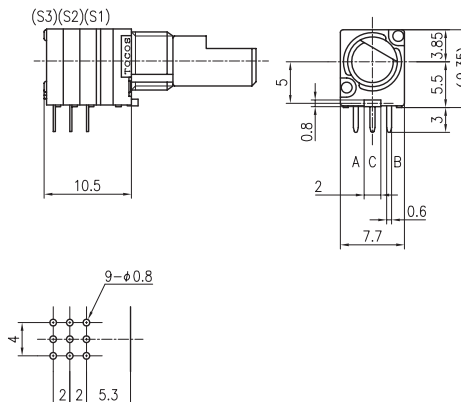



CODE

Detent position	S1		S2		S3
	A-C	B-C	A-C	B-C	A-C
FULL CCW 1	○	○	○	○	○
2	○	○	○	○	○
3	○	○	○	○	○
4	○	○	○	○	○
5	○	○	○	○	○
6	○	○	○	○	○
7	○	○	○	○	○
8	○	○	○	○	○
9	○	○	○	○	○
10	○	○	○	○	○
11	○	○	○	○	○
12	○	○	○	○	○
13	○	○	○	○	○
14	○	○	○	○	○
15	○	○	○	○	○
16	○	○	○	○	○

● : ON
○ : OFF

TP70QF4161

Coded Switch, Single Shaft, Quad Unit, 4 Circuit, 16 Channel

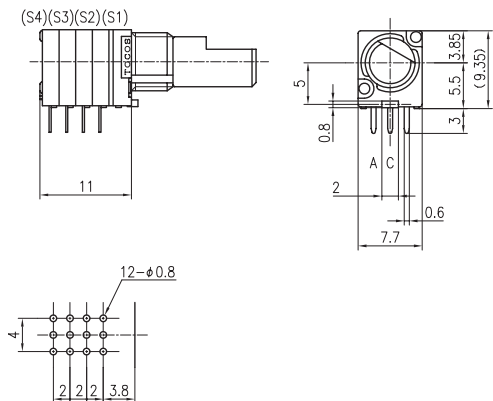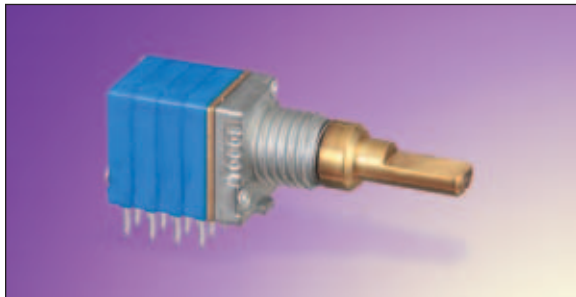

CODE

Detent position	S1	S2	S3	S4
	A-C	A-C	A-C	A-C
FULL CCW 1	○	○	○	○
2	○	○	○	○
3	○	○	○	○
4	○	○	○	○
5	○	○	○	○
6	○	○	○	○
7	○	○	○	○
8	○	○	○	○
9	○	○	○	○
10	○	○	○	○
11	○	○	○	○
12	○	○	○	○
13	○	○	○	○
14	○	○	○	○
15	○	○	○	○
16	○	○	○	○

● : ON
○ : OFF