




- SPECIFICATIONS:**
- ELECTRICAL CHARACTERISTICS:**
 - RATING: 1.8A(PIN1/5), 0.5A(PIN2/3/4)
 - CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 300V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
 - MECHANICAL CHARACTERISTICS:**
 - INSERTION FORCE: 3.6 KGF (MAX)
 - WITHDRAWAL FORCE: 0.8 KGF(Reference)
 - DURABILITY:** 10,000 CYCLES
 - WATER PROOFNESS:** THIS PRODUCT IS BASED ON IPX7(1m,30min)
 - PLUG INTERFACE DIMENSIONS CONFORM TO** USB2.0 SPEC.
 - OVAL RING**
 - The amount of low molecular siloxanes(D3-D10)is less than 200ppm
 - Hardness of silicone rubber: 70°
 - FOR REFLOW SOLDERING LEAD-FREE PROCESS.**
 - PACKAGING:** TAPE & REEL

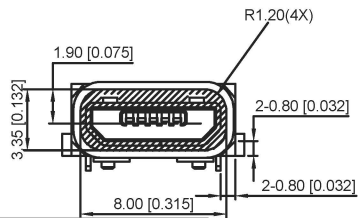

○				
③	Shell	1	Stainless Steel	T=0.25
②	Contact	5	Copper Alloy	T=0.20
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK
ITEM	PAPT NAME	QTY	MATERIAL	FINISHING

AUTODESK

AUTODESK

广东星坤科技股份有限公司

生效日期

MARK	DESCRIPTION	DATE	REVISED	APPROVED	REVISIONS

文件工程章

www.xkg.cn www.helloxkb.com www.helloxkb.cn

UNSPECIFIED TOLERANCES

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5

DSND		DATE		SCALE: N/A	MODEL TYPE: MICRO USB
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.:
APPD		DATE		SIZE: A4	U-E-M7SS-Y-4
XKB INDUSTRIAL PRECISION CO., LIMITED				WEIGHT	SHEET
				1.0g	1/1
				REVISION	A0