

BBS-5148-Z

Fanless Wallmount Embedded PC with Core™ 2 Duo, 4 COM, 5 USB, 100W ATX P/S, 4 Expansion Slot

Bare Bone




Features

- » Heat pipe, fanless wallmount embedded PC design
- » Supports Intel® Core™ 2 Duo processor TDP ≤ 25W
- » VGA, dual Gigabit Ethernet port
- » 1 x 3.5" SATA HDD space
- » 1 x CF socket
- » 3 x PCI slot, 1 x PCIe x16 slot
- » 4 x COM port, 5 x USB2.0 port, parallel port
- » 100W ATX power supply
- » Option for DVI-I display


System

- SBC**
HS-7322
- Backplane**
PE-5S
- CPU**
Intel® Core™ 2 Duo processor P7350 2.0GHz (option)
- System Chipset**
Intel® GM45/ICH9-M
- System Memory**
2 x 240-pin DIMM, DDR2 800MHz, Max. 4GB
- Display Interface:**
1 x D-SUB 15-pin or DVI-I (option)
- Ethernet Interface**
2 x RJ-45 for Gigabit Ethernet
- Storage**
1 x 3.5" SATA HDD space
1 x Type II CF socket
- Expansion Interface**
1 x PCIe x16 slot (if using DVI-I display, this slot will not be available)
3 x PCI slot
- Watchdog Timer**
Software programmable time-out intervals from 1~255 sec. or 1~255 min.
- H/W Status Monitor**
Monitoring temperatures, voltages status
- Thermal System**
Heat pipe
- Power**
100W ATX power supply
- Operating/Storage Temperature**
0~45°C/-20~+70°C
- Certification**
FCC/CE Class A compliance
- Dimensions**
25.0(L) x 23.8(H) x 14.8(W) cm

I/O Interface

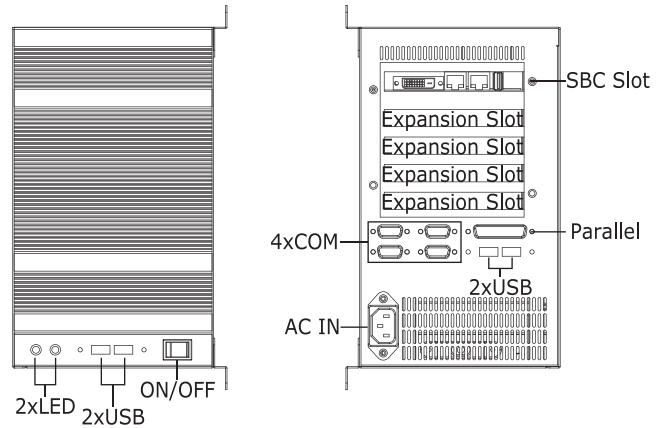

Dimensions (unit:cm)

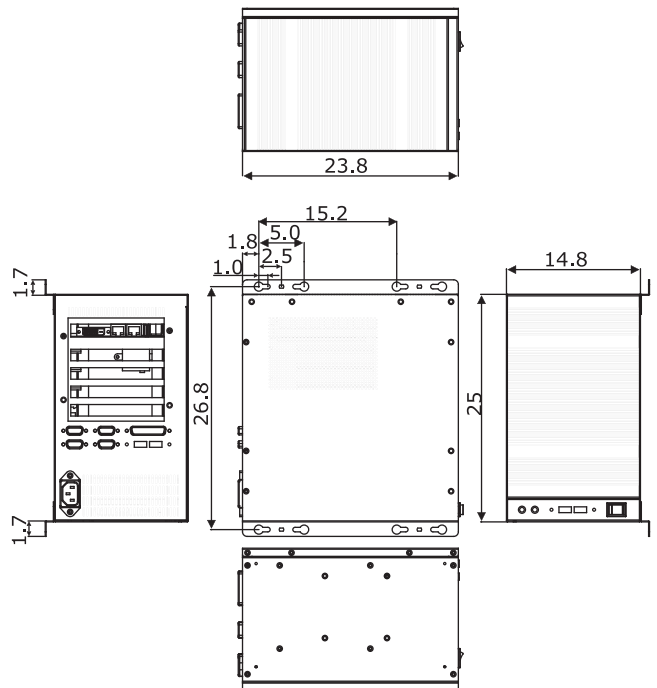

Ordering Information

BBS-5148-Z
Wallmount Embedded PC w/4 COM, 5 USB, 100W ATX P/S

Accessory Options
CPU, Memory Module, CF Module, 3.5" SATA HDD