

SHEET 1 OF 1

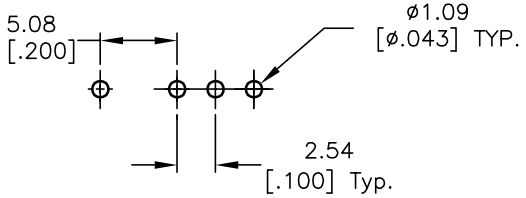

RECOMMENDED P.C.B. LAYOUT




CIRCUIT: SPDT
CONTACT CONFIGURATION


▲


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	OFF	ON
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. ▲ RATING: 3A @120VAC, OR 28VDC
   1A @250VAC
5. FIXED TERMINAL/MOVING CONTACT MATERIAL:
   COPPER ALLOY w/SILVER PLATING
6. ELECTRIC LIFE: 30,000 make-and-break cycles
   at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP. -30°C to +85°C
10. ▲ DENOTES CRITICAL PARAMETER.

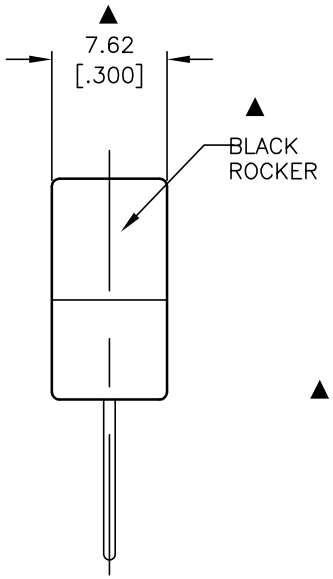

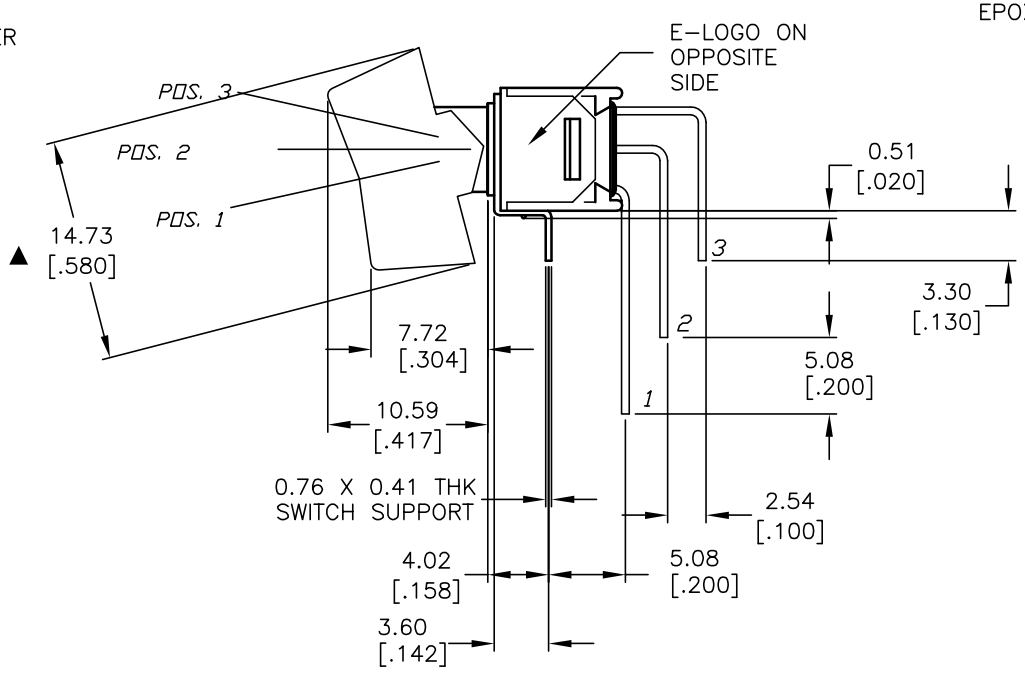

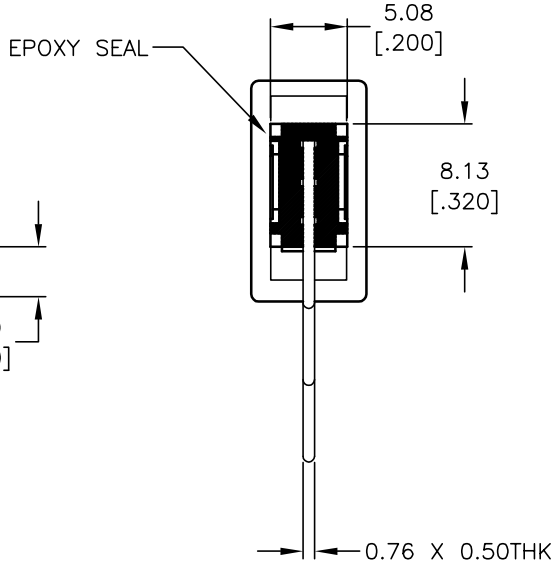

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	14323	RELEASED FOR PRODUCTION	9/16/04	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 400MSP3R1BLKM7QE

SCALE	DATE	DR	DWG	REV
2:1	9/16/04	AR	T413005	A